


ASSEMBLY INSTRUCTIONS

Marcell 56" Linear Chandelier

Item # AMB5030

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

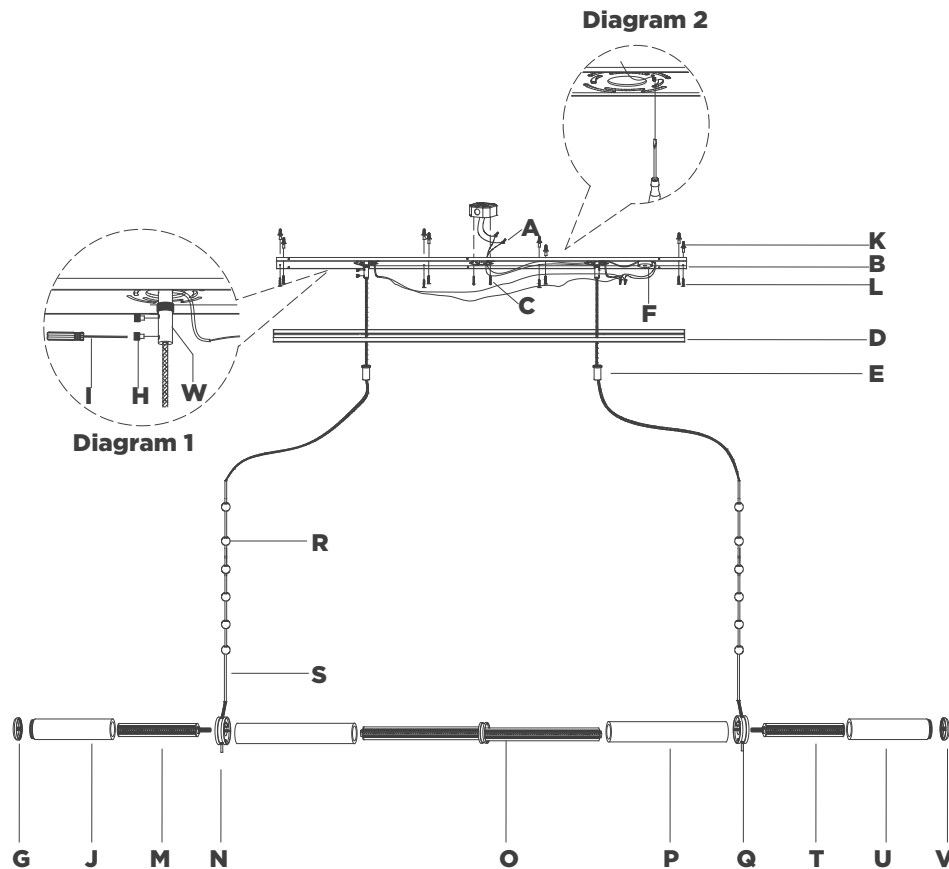


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Wire Cutters	Measuring Tape	Hammer
Pencil	Drill	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy (D) from mounting plate (B) by removing collar rings (E).
3. Using mounting plate (B) as a guide, line up with the junction box and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (K) into the holes using a hammer.
5. Install mounting plate (B) to the junction box and secure with mounting screws (C), then secure wood screws (L) to anchors (K).
6. Gently set fixture on a flat, non-abrasive surface to assemble and adjust fixture hanging wires.
7. Carefully slide shades (P) over light source (O).
8. Attach rings (N & Q) to light source (O) and secure with light sources (M & T).
9. Attach shades (J & U) to light sources (M & T) and secure with end caps (G & V) as shown in diagram.

ASSEMBLY INSTRUCTIONS

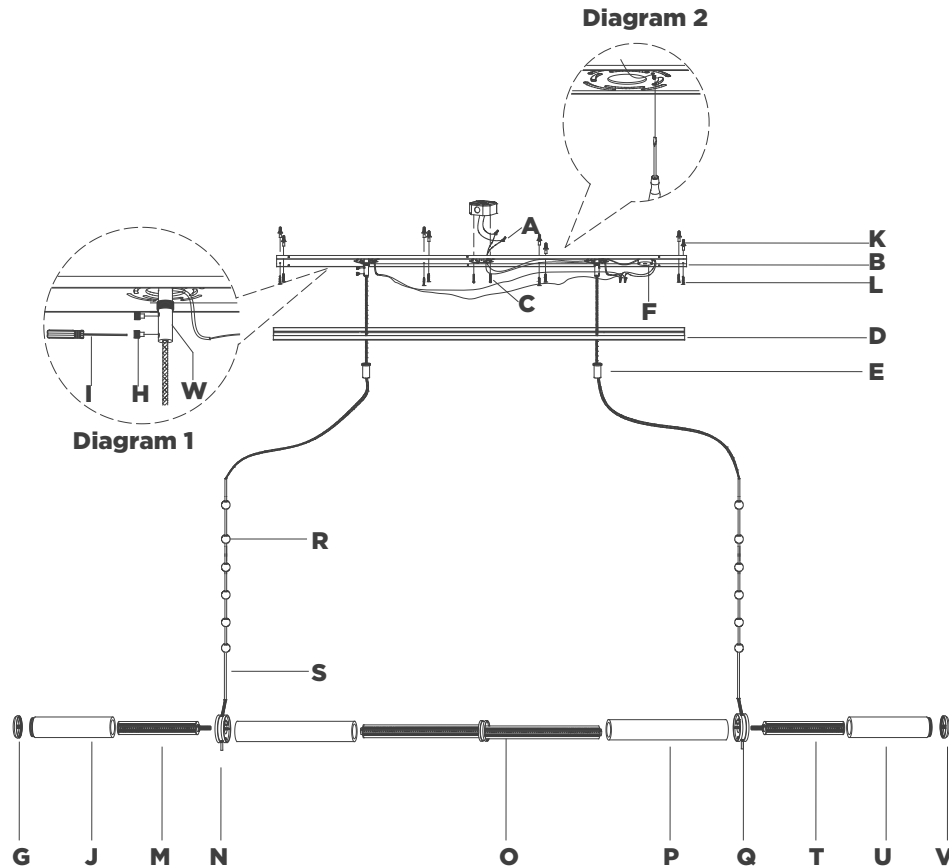

Marcell 56" Linear Chandelier

Item # AMB5030

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

17. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 2). Tighten.
- NOTE:** It is imperative that the fixture is grounded.
18. Connect driver (F) input neutral wire (white) to the supply neutral wire (usually white) using wire nut (A).
19. Connect driver (F) input hot wire (black) to the supply hot wire (usually black) using wire nut (A).
- CAUTION:** Do not reverse the hot and neutral connections.
20. Make sure all wire connections are tight, then carefully tuck into the junction box.
21. Install canopy (D) to collar loop (W) and secure with collar rings (E).
22. Adjust balls (R) to desired position.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.