

ASSEMBLY INSTRUCTIONS

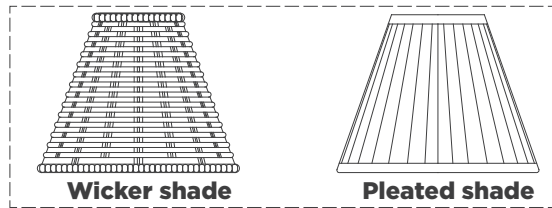


Diagram 2

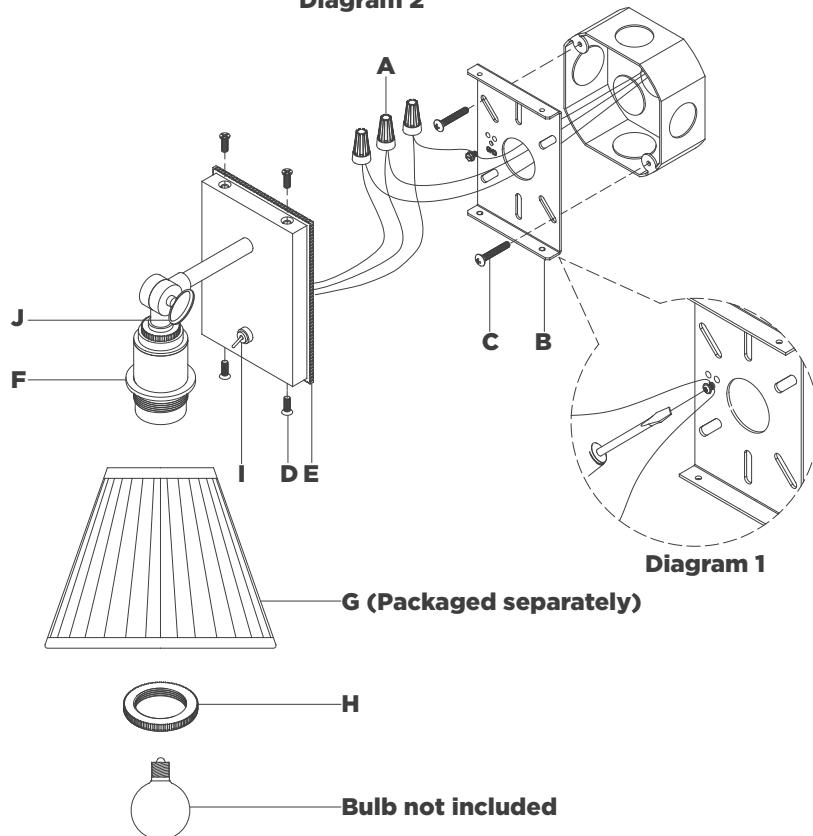


Diagram 1

Wimberley Bedside Wall Light

Item # MF2203

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver

Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate (B) from fixture (E) by removing screws (D).
3. Install mounting plate (B) to the junction box and secure with mounting screws (C).
4. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (A).
5. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut (A).
6. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut (A).

NOTE: It is imperative that the fixture is grounded.

7. Make sure all wire connections are tight, then carefully tuck into the junction box.
8. Install fixture (E) to mounting plate (B) and secure with screws (D).

CAUTION: Do not reverse the hot and neutral connections.

ASSEMBLY INSTRUCTIONS

Wimberley Bedside Wall Light

Item # MF2203

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

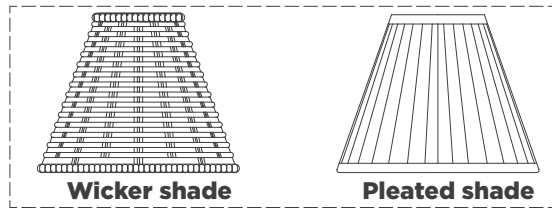


Diagram 2

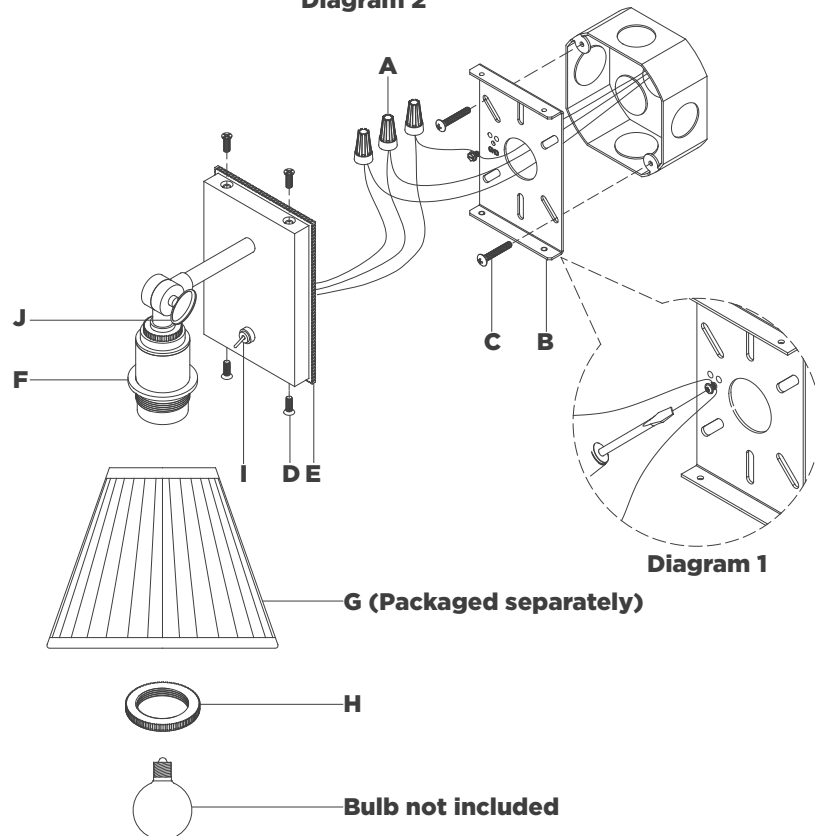


Diagram 1

9. Remove socket ring **(H)** from socket cup **(F)**, then install shade **(G)** to socket cup **(F)** and secure with socket ring **(H)**.

NOTE: If shade has additional packaging, carefully cut from interior of shade to avoid damage.

10. Install light bulb into the socket.
11. Loosen adjustment knob **(J)** to adjust fixture to desired angle, then adjustment knob **(J)**.
12. Push switch **(I)** upward/downward to turn on/off fixture.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.