ASSEMBLY INSTRUCTIONS

Option 1: Curved 2-Canopy Install

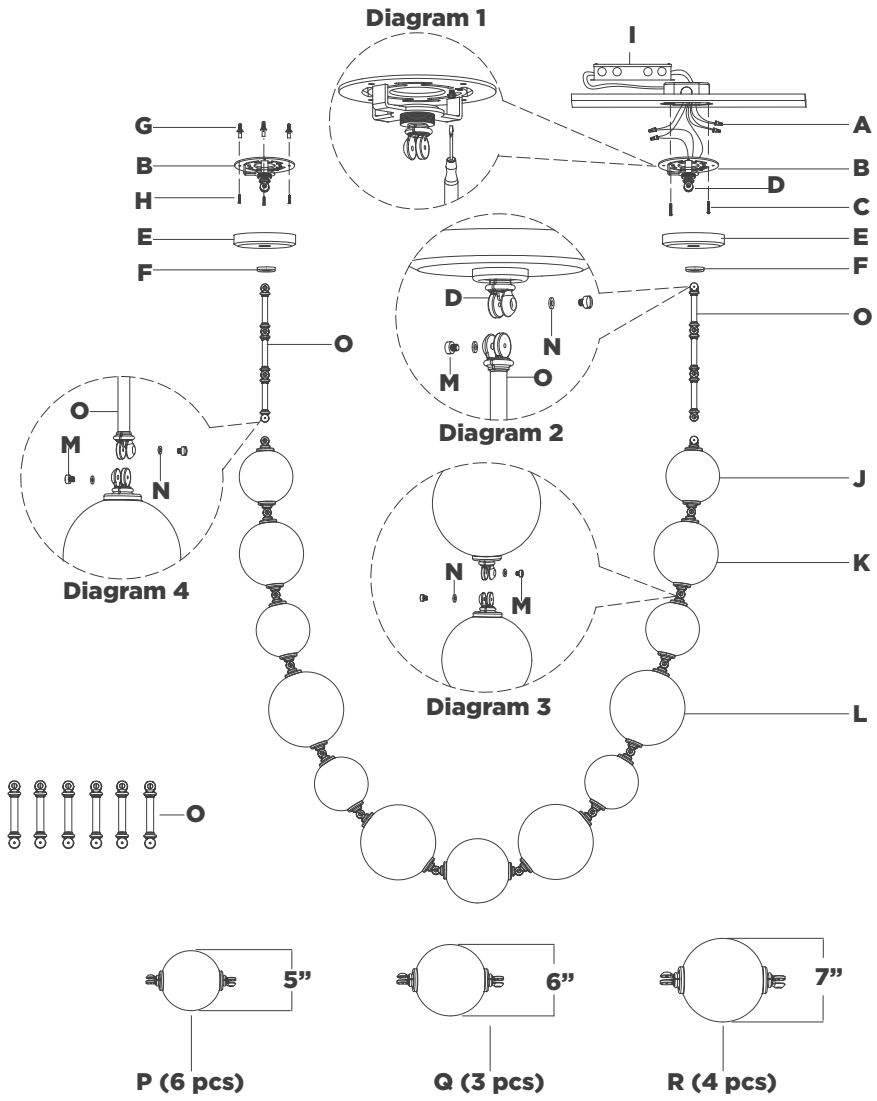

Datum Necklace Chandelier

Item # CHC5670

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Hammer
Pencil	Drill	

PERSONS REQUIRED: Two

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Place driver **(I)** into ceiling and route all wires through one of the knockouts in the junction box.
3. Remove mounting plates **(B)** from canopies **(E)** by removing collar rings **(F)**.
   NOTE: Carefully measure distance between mounting points for mounting plates **(B)** before moving to the next step.
4. Using portable mounting plate **(B)** as a guide, mark anchor positions.
5. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(G)** into the holes using hammer.
6. Connect fixture neutral wire (blue) to driver **(I)** output wire (blue) using wire nut **(A)**.
7. Connect fixture hot wire (red) to driver **(I)** output wire (red) using wire nut **(A)**.
8. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
   NOTE: It is imperative that the fixture is grounded.

ASSEMBLY INSTRUCTIONS

Option 1: Curved 2-Canopy Install

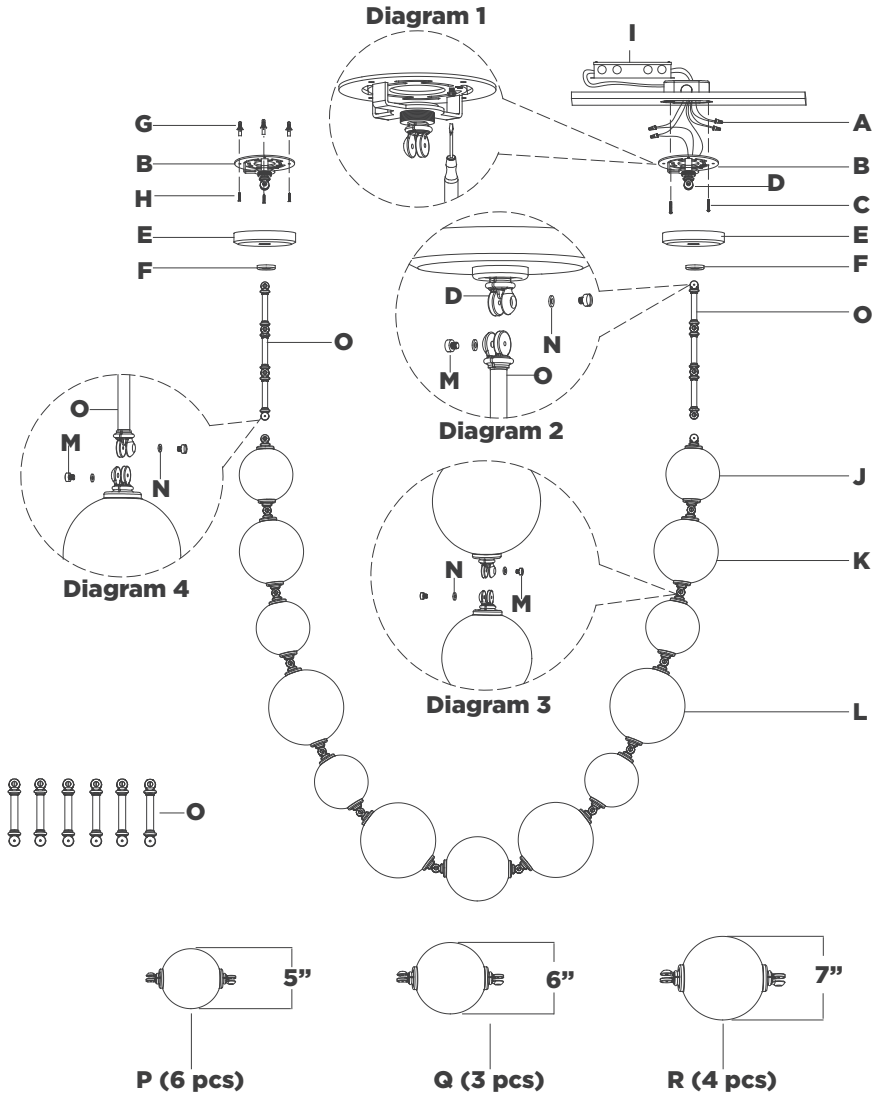

Datum Necklace Chandelier

Item # CHC5670

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

9. Connect driver **(I)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
10. Connect driver **(I)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
    CAUTION: Do not reverse the hot and neutral connections.
11. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.
12. Install another mounting plate **(B)** to wall by securing wood screws **(G)** to anchors **(H)**.
13. Install canopies **(E)** to mounting plates **(B)** and secure with collar rings **(F)**.
14. Install rod sets **(O)** to collars **(D)** and secure with rubber washers **(N)** and screws **(M)** (see diagram 2).
    NOTE: Select the appropriate quantity of rods to achieve the desired fixture appearance and hanging height.
15. Select the desired combination of glass ball sizes **(P & Q & R)** and quantities to achieve the preferred fixture appearance and hanging height.
16. Install glass balls together and secure with rubber washers **(N)** and screws **(M)** using provided screwdriver **(T)** (see diagram 3).
17. Install assembled glass ball sets to rod sets **(O)** and secure with rubber washers **(N)** and screws **(M)** (see diagram 4).

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

ASSEMBLY INSTRUCTIONS

Option 2: 1-Canopy Vertical Install

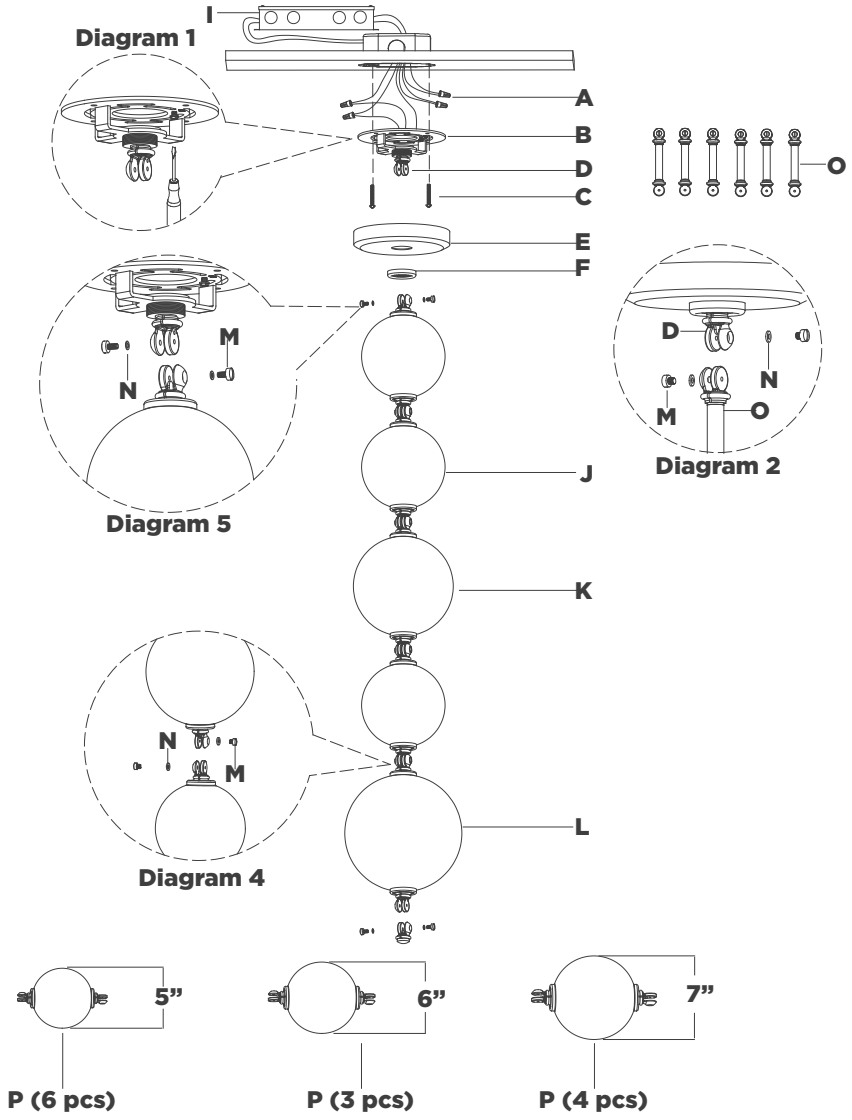

Datum Necklace Chandelier

Item # CHC5670

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Hammer
Pencil	Drill	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Place driver **(I)** into ceiling and route all wires through one of the knockouts in the junction box.
3. Remove mounting plates **(B)** from canopies **(E1 & E2)** by removing collar rings **(F)**.
   NOTE: Another canopy **(E)** and collar ring **(F)** will be not be used for 1-canopy vertical install. Keep part and store for future use.
4. Connect fixture neutral wire (blue) to driver **(I)** output wire (blue) using wire nut **(A)**.
5. Connect fixture hot wire (red) to driver **(I)** output wire (red) using wire nut **(A)**.
6. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
   NOTE: It is imperative that the fixture is grounded.
7. Connect driver **(I)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
8. Connect driver **(I)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
   CAUTION: Do not reverse the hot and neutral connections.
9. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.

ASSEMBLY INSTRUCTIONS

Option 2: 1-Canopy Vertical Install

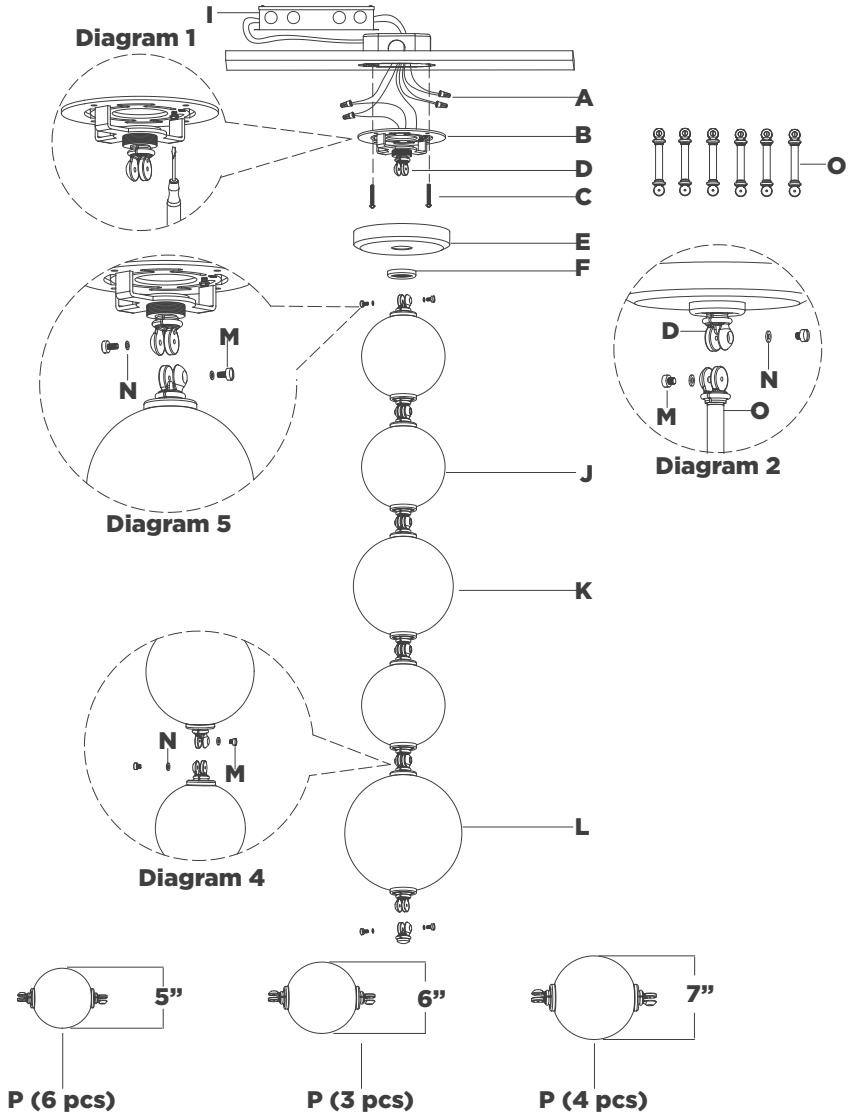

Datum Necklace Chandelier

Item # CHC5670

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

10. Install canopy **(E)** to mounting plates **(B)** and secure with collar rings **(F)**.
11. Select the desired combination of glass ball sizes **(P & Q & R)** and quantities to achieve the preferred fixture appearance and hanging height.
12. Install glass balls together and secure with rubber washers **(N)** and screws **(M)** (see diagram 4).
13. Install assembled glass ball sets to collar **(D)** and secure with rubber washers **(N)** and screws **(M)** (see diagram 5).

RODS INSTALLATION OPTION:

13. Select the appropriate quantity of rods and connect them together to achieve the desired fixture appearance and hanging height.
14. Install rod **(O)** to collar **(D)** and secure with rubber washers **(N)** and screws **(M)** (see diagram 2).
15. Install assembled glass ball sets to rod **(O)** and secure with rubber washers **(N)** and screws **(M)** (see diagram 5).

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.