

# WAC LIGHTING

## Dot

### Ceiling Mount

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-W57806 6"	3000K	BK Black SS Stainless Steel	10W	878	574

Example: **FM-W57806-30-SS**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Optimal diffuser amplifies the rightness on this durable waterproof outdoor flush mount.

#### FEATURES

- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS


Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant,Energy Star 2.0,ADA Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade



#### FINISHES:



#### LINE DRAWING:

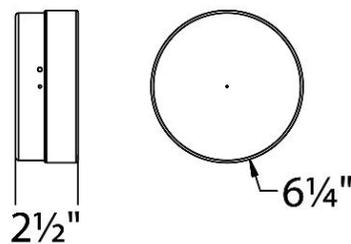

**FM-W57806**

# WAC LIGHTING

## Dot

### Ceiling Mount

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-W57809 9"	3000K	BK Black SS Stainless Steel	17W	1571	1070

Example: **FM-W57809-30-SS**

•For 277V special order, add an "F" before the finish: FM-W57809F-27-BK

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Optimal diffuser amplifies the rightness on this durable waterproof outdoor flush mount.

#### FEATURES

- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant,Energy Star 2.0,ADA Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade




#### FINISHES:



Black

Stainless Steel

#### LINE DRAWING:

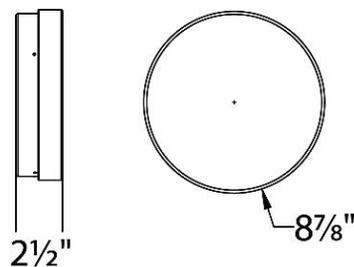

**FM-W57809**

# WAC LIGHTING

## Dot

### Ceiling Mount

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-W57812 12"	3000K	BK Black SS Stainless Steel	27W	2566	1482

Example: **FM-W57812-30-SS**

•For 277V special order, add an "F" before the finish: FM-W57812F-27-BK

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Optimal diffuser amplifies the rightness on this durable waterproof outdoor flush mount.

#### FEATURES

- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant,Energy Star 2.0,ADA Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade




#### FINISHES:



Black

Stainless Steel

#### LINE DRAWING:

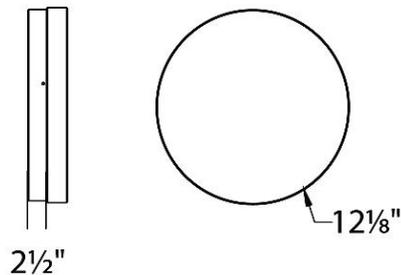

**FM-W57812**

# WAC LIGHTING

## Dot

### Ceiling Mount

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-W57815 15"	3000K	BK Black SS Stainless Steel	31W	2400	1773

Example: **FM-W57815-30-SS**

•For 277V special order, add an "F" before the finish: FM-W57815F-27-BK

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Optimal diffuser amplifies the rightness on this durable waterproof outdoor flush mount.

#### FEATURES

- Lightweight, injection-molded, UV-rated acrylic diffuser enhances brightness, safety lock prevents slippage
- 277V option available for 9", 12" & 15" sizes (special order)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant,Energy Star 2.0,ADA Wet Location Listed
Construction:	Weather-resistant 316 stainless steel body with thick acrylic shade



#### FINISHES:



#### LINE DRAWING:

