


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:16.603V I:0.1005A P:1.6685W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:163.688x1 lm


NAME: 3911-CSBZ-W	TYPE: Surface-mounted Luminaire	HEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 98.11 lm/W
MODEL		Imax(cd)	78.92	S/MH(C0/180)	1.05	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.02	
RATED VOLTAGE(V)	18	TOTAL FLUX(lm)	163.69	η UP,DN(C0-180)	0.0,50.7	
NOMINAL FLUX(lm)	163.688	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.3	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.00	
TEST VOLTAGE(V)	18	η down(%)	100.0	CIBSE SHR MAX	1.15	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

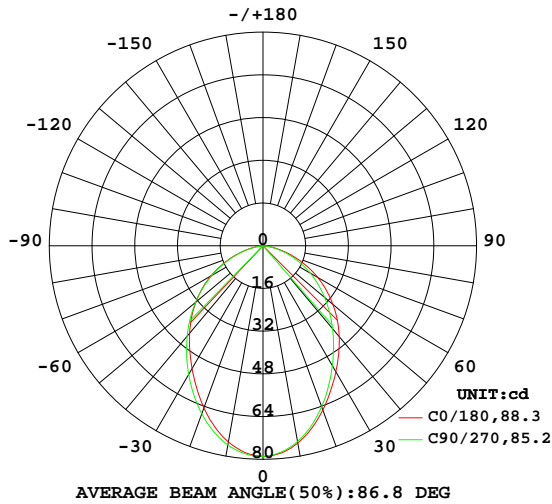

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

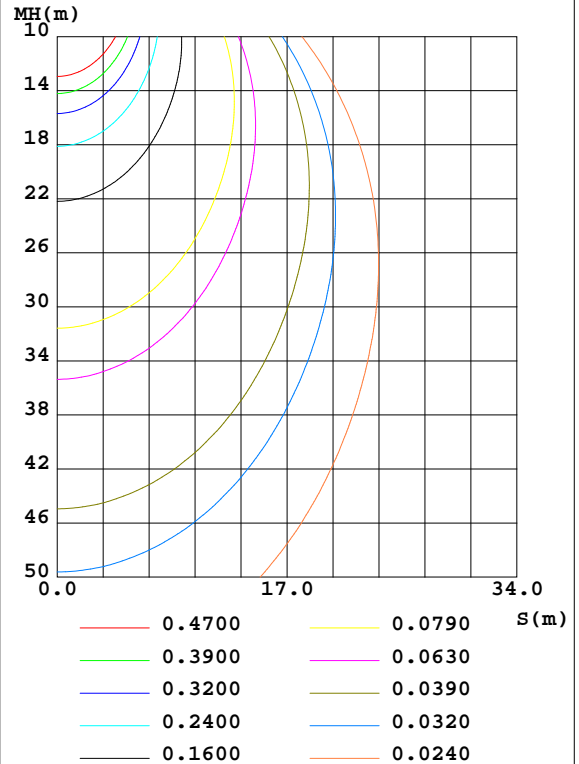

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.519m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum
10	74.63	75.31	75.78	75.46	75.09	74.46	74.45	74.81	0- 10	7.341	7.341	4.48
20	64.66	66.13	66.98	66.52	65.52	64.27	64.21	64.69	10- 20	19.83	27.17	16.6
30	53.14	55.25	55.69	55.17	54.59	52.98	51.98	52.34	20- 30	27.43	54.60	33.4
40	42.77	44.89	44.19	43.69	44.45	42.72	40.55	40.87	30- 40	30.26	84.86	51.8
50	32.80	34.30	32.97	32.53	34.22	32.80	30.17	30.36	40- 50	29.13	114.0	69.6
60	22.40	23.22	21.89	21.58	23.67	22.76	20.44	20.57	50- 60	24.38	138.4	84.5
70	11.89	12.22	11.37	11.22	12.87	12.51	11.06	11.10	60- 70	16.66	155.0	94.7
80	3.067	3.124	2.860	2.831	3.700	3.684	3.261	3.247	70- 80	7.587	162.6	99.3
90	0	0	0	0	0	0	0	0	80- 90	1.076	163.7	100
100	0	0	0	0	0	0	0	0	90-100	0.0000	163.7	100
110	0	0	0	0	0	0	0	0	100-110	0.0000	163.7	100
120	0	0	0	0	0	0	0	0	110-120	0	163.7	100
130	0	0	0	0	0	0	0	0	120-130	0	163.7	100
140	0	0	0	0	0	0	0	0	130-140	0	163.7	100
150	0	0	0	0	0	0	0	0	140-150	0	163.7	100
160	0	0	0	0	0	0	0	0	150-160	0	163.7	100
170	0	0	0	0	0	0	0	0	160-170	0	163.7	100
180	0	0	0	0	0	0	0	0	170-180	0	163.7	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 99.799 lm

%lum = 61.0%

%lamp = 61.0%

Conical surface Flux(120deg): 138.37 lm


%lum = 84.5%

%lamp = 84.5%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.519m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

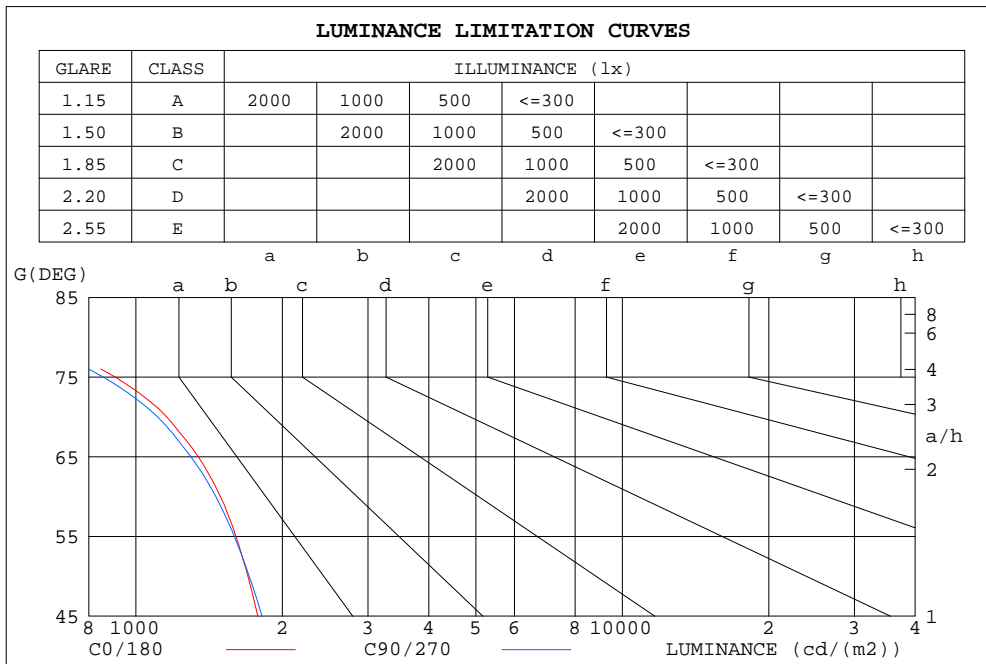


LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	227	208
80	588	549
75	907	857
70	1158	1109
65	1344	1298
60	1492	1460
55	1606	1594
50	1699	1710
45	1781	1819

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2022-10-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.519m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.98	1.03	1.00	.97	.99	.96	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.93	.87	.82	.91	.86	.81	.88	.83	.79	.85	.81	.77	.82	.78	.76	.73
3.0	.83	.75	.69	.81	.74	.69	.78	.72	.67	.76	.71	.66	.73	.69	.65	.63
4.0	.74	.66	.59	.73	.65	.59	.70	.64	.58	.68	.62	.58	.66	.61	.57	.55
5.0	.67	.58	.52	.65	.58	.52	.63	.56	.51	.61	.55	.50	.60	.54	.50	.48
6.0	.60	.52	.46	.59	.51	.46	.58	.50	.45	.56	.50	.45	.54	.49	.44	.42
7.0	.55	.47	.41	.54	.46	.41	.53	.46	.40	.51	.45	.40	.50	.44	.40	.38
8.0	.50	.42	.37	.50	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
9.0	.47	.39	.33	.46	.38	.33	.45	.38	.33	.44	.37	.33	.43	.37	.33	.31
10.0	.43	.35	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.30	.28

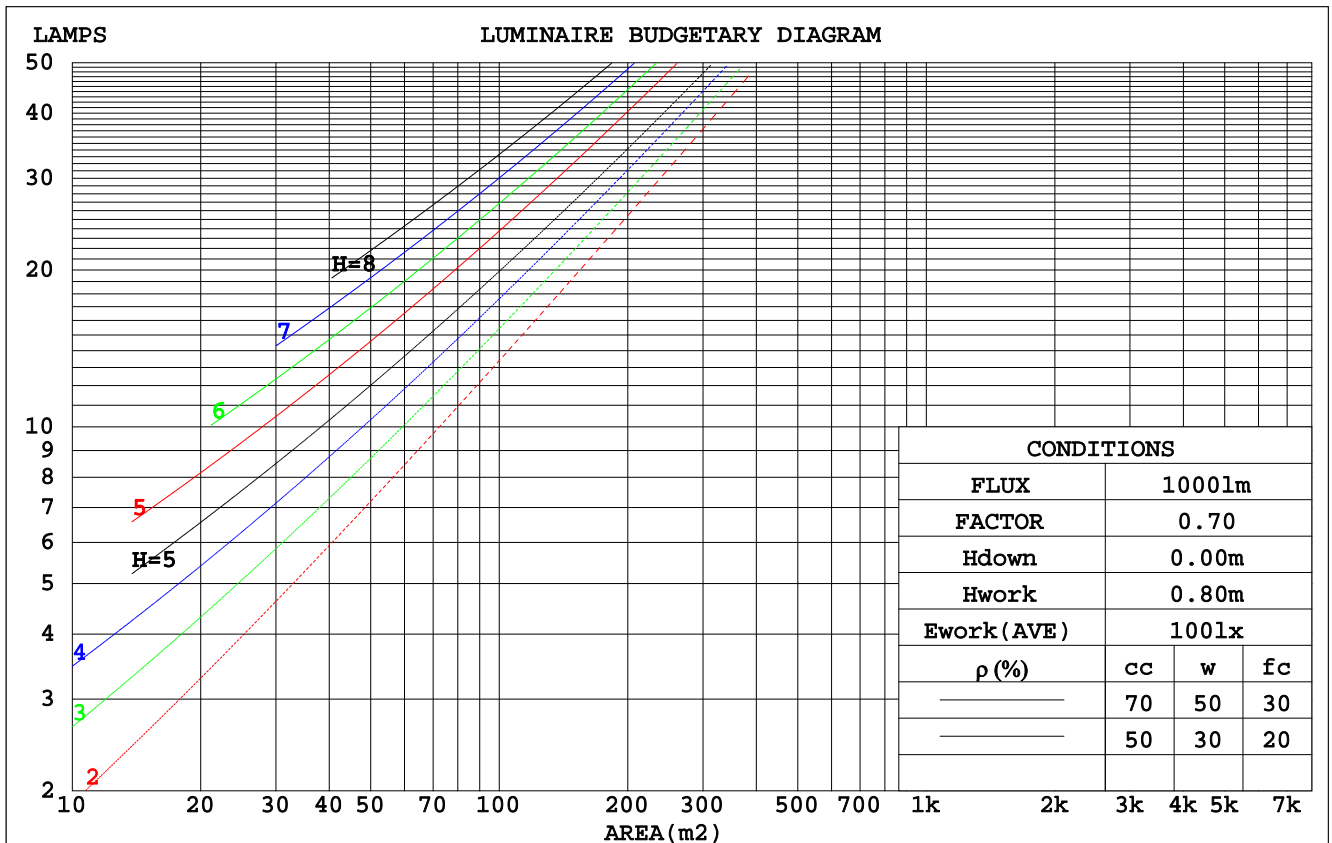

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.519m [K=1.0000]
 Remarks:

WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.274	.156	.049	.267	.153	.048	.254	.146	.047	.242	.140	.045	.231	.134	.043		
2.0	.264	.145	.044	.258	.142	.044	.247	.137	.043	.236	.132	.041	.226	.128	.040		
3.0	.248	.132	.040	.243	.130	.039	.233	.126	.038	.223	.122	.038	.215	.119	.037		
4.0	.231	.120	.035	.227	.119	.035	.218	.115	.034	.209	.112	.034	.202	.110	.033		
5.0	.216	.110	.032	.211	.109	.032	.203	.106	.031	.196	.103	.031	.189	.101	.030		
6.0	.201	.101	.029	.197	.100	.029	.190	.098	.028	.184	.096	.028	.178	.094	.028		
7.0	.188	.093	.026	.185	.092	.026	.179	.090	.026	.173	.089	.026	.167	.087	.026		
8.0	.177	.086	.024	.174	.085	.024	.168	.084	.024	.163	.082	.024	.158	.081	.024		
9.0	.166	.080	.022	.163	.080	.022	.158	.078	.022	.154	.077	.022	.149	.076	.022		
10.0	.157	.075	.021	.154	.075	.021	.150	.073	.021	.145	.072	.021	.141	.071	.020		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.178	.156	.137	.152	.134	.118	.104	.092	.082	.060	.053	.047	.019	.017	.015		
2.0	.169	.132	.101	.144	.114	.088	.099	.079	.061	.057	.046	.036	.018	.015	.012		
3.0	.160	.114	.077	.137	.098	.067	.094	.068	.047	.054	.040	.028	.018	.013	.009		
4.0	.152	.101	.061	.131	.087	.053	.090	.061	.037	.052	.035	.022	.017	.012	.007		
5.0	.145	.090	.049	.125	.078	.043	.086	.054	.030	.050	.032	.018	.016	.010	.006		
6.0	.138	.081	.041	.119	.071	.036	.082	.049	.025	.047	.029	.015	.015	.010	.005		
7.0	.131	.075	.035	.113	.065	.030	.078	.045	.021	.045	.027	.013	.015	.009	.004		
8.0	.125	.069	.030	.108	.060	.026	.075	.042	.018	.043	.025	.011	.014	.008	.004		
9.0	.119	.064	.026	.103	.055	.023	.071	.039	.016	.042	.023	.010	.013	.008	.003		
10.0	.114	.059	.023	.098	.052	.020	.068	.036	.014	.040	.021	.009	.013	.007	.003		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.519m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.5	15.9	14.7	16.1	16.3	14.4	15.8	14.6	16.0	16.2
3H	15.6	16.9	15.8	17.1	17.3	15.4	16.7	15.7	16.9	17.2
4H	15.9	17.1	16.2	17.4	17.6	15.7	16.9	16.0	17.2	17.4
6H	16.0	17.2	16.3	17.4	17.7	15.8	17.0	16.1	17.2	17.5
8H	16.0	17.1	16.3	17.4	17.7	15.8	16.9	16.1	17.2	17.5
12H	15.9	17.0	16.3	17.3	17.6	15.7	16.8	16.1	17.1	17.4
4H 2H	15.0	16.2	15.3	16.4	16.7	14.9	16.1	15.2	16.4	16.6
3H	16.2	17.3	16.6	17.6	17.9	16.1	17.2	16.4	17.4	17.7
4H	16.6	17.6	17.0	17.9	18.3	16.5	17.4	16.8	17.8	18.1
6H	16.8	17.7	17.2	18.0	18.4	16.6	17.5	17.0	17.8	18.2
8H	16.8	17.6	17.2	18.0	18.4	16.6	17.4	17.0	17.8	18.2
12H	16.8	17.5	17.2	17.9	18.3	16.6	17.3	17.0	17.7	18.1
8H 4H	16.7	17.5	17.1	17.9	18.3	16.6	17.4	17.0	17.7	18.1
6H	17.0	17.6	17.4	18.0	18.5	16.8	17.5	17.2	17.9	18.3
8H	17.0	17.6	17.5	18.0	18.5	16.8	17.4	17.3	17.8	18.3
12H	17.0	17.5	17.5	18.0	18.4	16.8	17.3	17.3	17.8	18.2
12H 4H	16.7	17.4	17.1	17.8	18.2	16.6	17.3	17.0	17.7	18.1
6H	17.0	17.6	17.4	18.0	18.4	16.8	17.4	17.3	17.8	18.3
8H	17.0	17.5	17.5	18.0	18.4	16.8	17.3	17.3	17.8	18.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.5					+ 0.2 / - 0.4				
2.0H	+ 0.4 / - 0.5					+ 0.4 / - 0.5				

CIE Pub.117, 163.7 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -6.3)
Area: 0.03 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.519m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	62	51	44	61	51	44	60	50	44	38
0.80	72	61	54	71	60	54	69	60	54	47
1.00	80	70	63	79	69	63	77	70	62	56
1.25	87	77	71	85	76	70	83	75	69	63
1.50	91	83	76	90	82	76	87	80	75	68
2.00	98	90	84	96	89	84	93	87	82	75
2.50	101	94	89	99	93	88	96	90	86	78
3.00	104	98	93	102	97	92	98	94	90	82
4.00	108	103	99	106	101	97	102	98	95	86
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.519m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

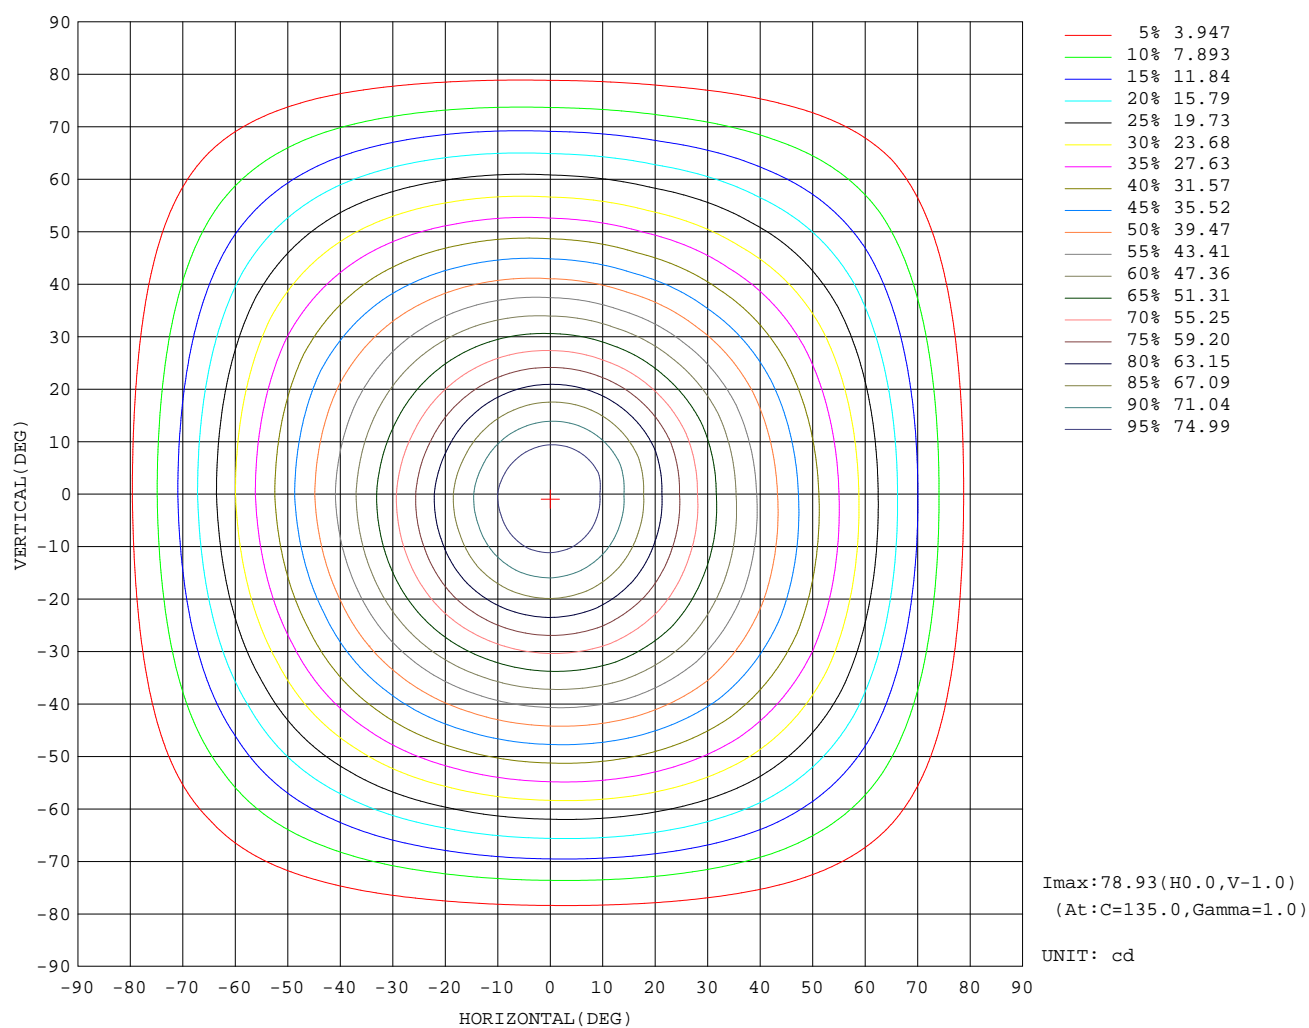

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.519m [K=1.0000]
Remarks:


AAI Figure

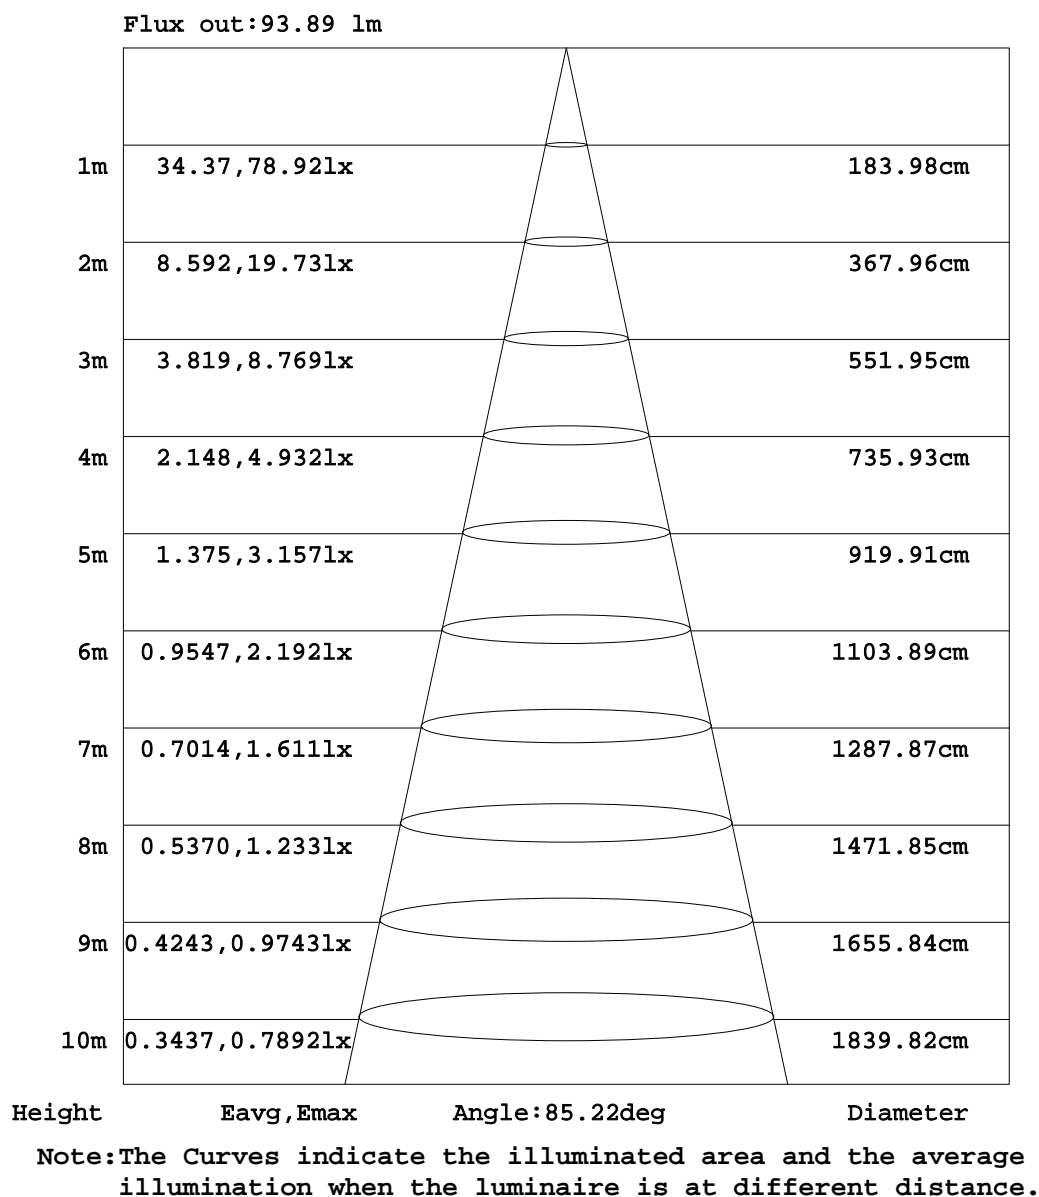

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.519m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

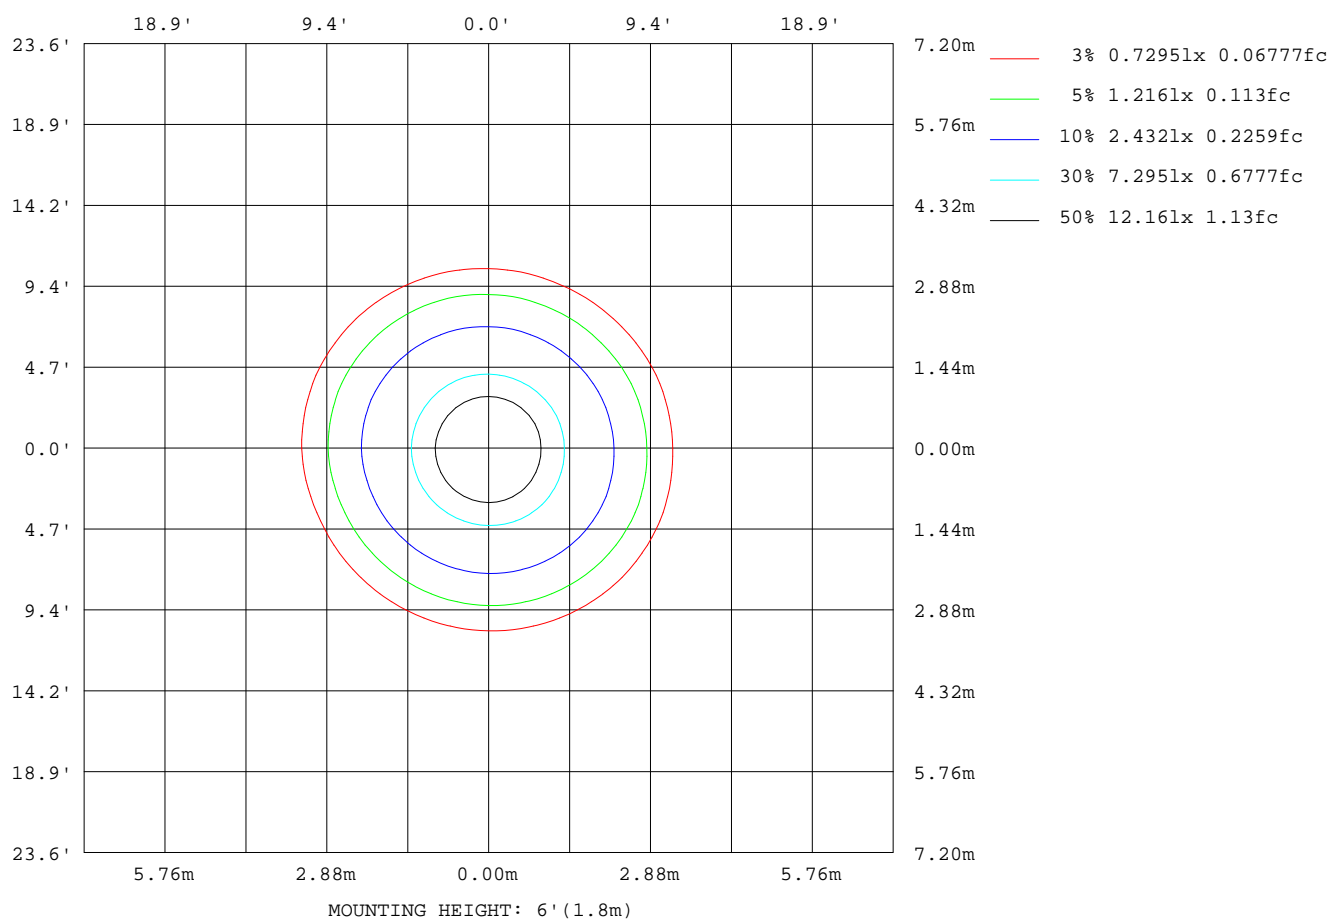

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.519m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:16.603V I:0.1005A P:1.6685W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:163.688x1 lm		
NAME: 3911-CSBZ-W	TYPE: Surface-mounted Luminaire	HEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1391
L_0~180(75)av	956
L_0~180(85)av	264
L_90~270(65)av	1266
L_90~270(75)av	863
L_90~270(85)av	242
L_45(65)av	1324
L_45(75)av	908
L_45(85)av	257

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.519m [K=1.0000]
 Remarks:

Planar Illuminance Curve

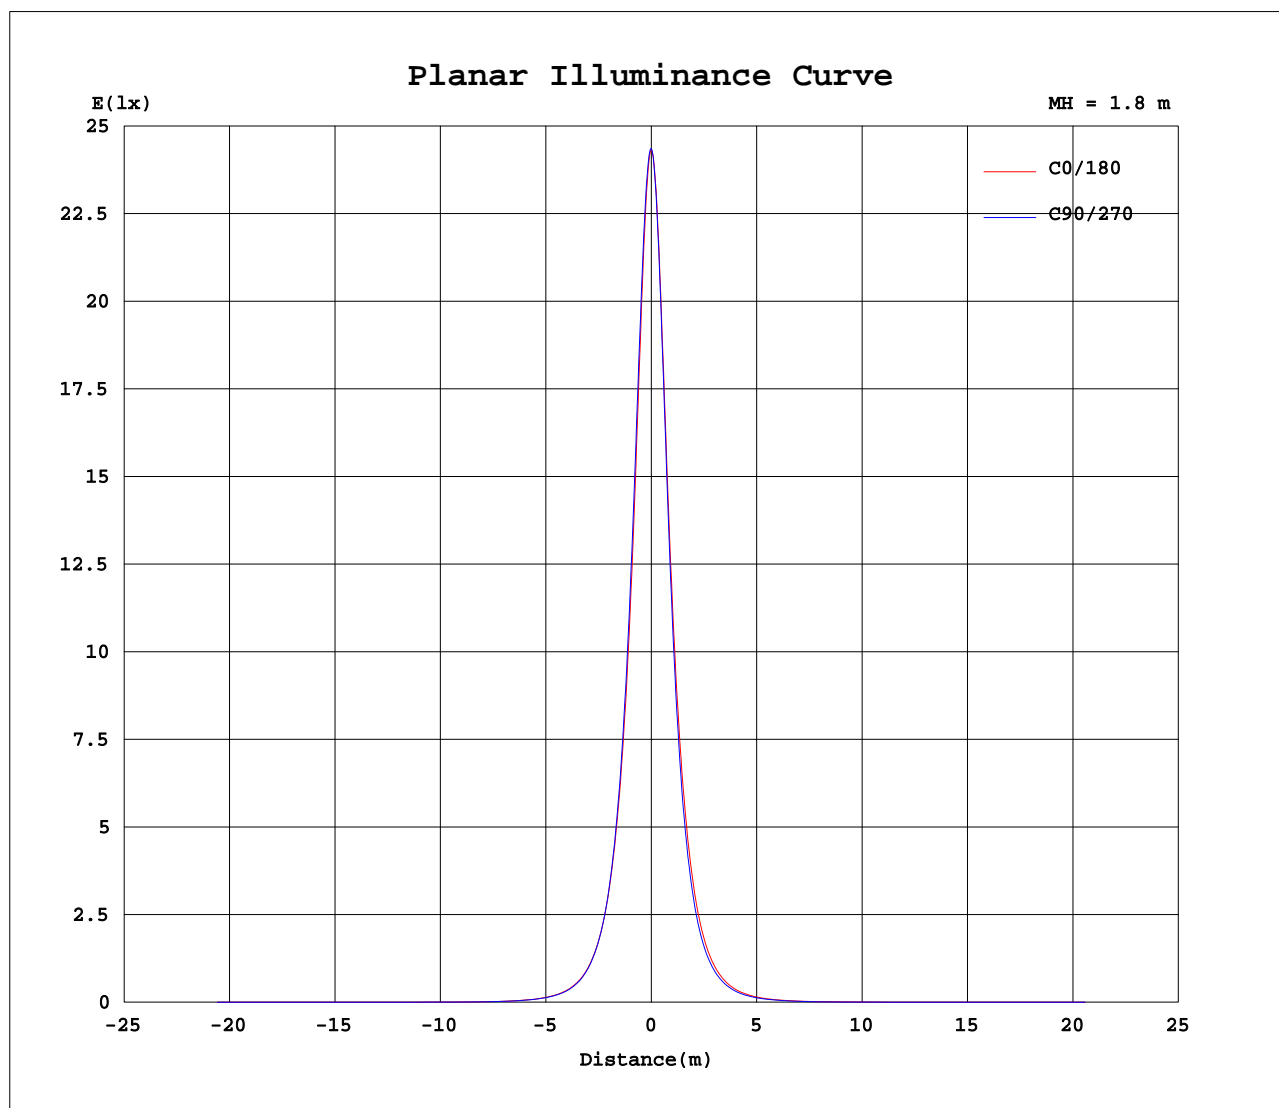

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.519m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9	78.9			
5	77.7	77.8	78.0	78.1	78.2	78.2	78.1	77.9	77.9	77.7	77.6	77.5	77.6	77.7	77.8	77.9			
10	74.6	74.9	75.3	75.6	75.8	75.7	75.5	75.1	75.1	74.7	74.5	74.3	74.4	74.7	74.8	75.0			
15	70.1	70.5	71.1	71.6	71.9	71.9	71.5	70.9	70.7	70.0	69.7	69.6	69.8	70.1	70.3	70.5			
20	64.7	65.2	66.1	66.7	67.0	66.9	66.5	65.8	65.5	64.7	64.3	64.1	64.2	64.4	64.7	65.0			
25	58.8	59.6	60.6	61.3	61.4	61.3	60.9	60.3	60.0	59.0	58.5	58.2	58.1	58.2	58.5	59.0			
30	53.1	54.1	55.3	55.8	55.7	55.4	55.2	54.8	54.6	53.6	53.0	52.4	52.0	51.9	52.3	53.1			
35	47.8	48.9	50.0	50.3	49.9	49.5	49.4	49.3	49.4	48.6	47.7	46.9	46.1	45.9	46.5	47.5			
40	42.8	44.0	44.9	44.8	44.2	43.7	43.7	43.9	44.4	43.7	42.7	41.6	40.5	40.3	40.9	42.1			
45	37.8	39.1	39.7	39.3	38.6	38.1	38.1	38.4	39.4	39.0	37.8	36.4	35.3	34.9	35.5	36.9			
50	32.8	34.1	34.3	33.7	33.0	32.5	32.5	33.0	34.2	34.0	32.8	31.3	30.2	29.8	30.4	31.8			
55	27.7	28.8	28.8	28.1	27.4	27.0	27.0	27.5	28.9	28.9	27.7	26.3	25.2	24.8	25.4	26.7			
60	22.4	23.4	23.2	22.5	21.9	21.6	21.6	22.1	23.7	23.8	22.8	21.5	20.4	20.0	20.6	21.8			
65	17.1	17.8	17.6	17.0	16.4	16.2	16.2	16.7	18.2	18.4	17.6	16.5	15.6	15.3	15.7	16.8			
70	11.9	12.3	12.2	11.8	11.4	11.2	11.2	11.6	12.9	13.0	12.5	11.7	11.1	10.8	11.1	11.9			
75	7.05	7.28	7.21	6.92	6.65	6.54	6.58	6.81	7.79	7.89	7.64	7.18	6.74	6.57	6.77	7.24			
80	3.07	3.15	3.12	2.98	2.86	2.80	2.83	2.93	3.70	3.77	3.68	3.48	3.26	3.16	3.25	3.46			
85	0.59	0.61	0.60	0.57	0.54	0.53	0.56	0.60	0.79	0.83	0.83	0.79	0.72	0.69	0.70	0.74			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2022-10-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.519m [K=1.0000]
 Remarks: