


## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:13.644V I:1.0332A P:13.946W PF:0.9893 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:580.7x1 lm


NAME: 5811-70°-6500K-新驱动	TYPE: 固定式灯具	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.: 0.01	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 41.64 lm/W			
MODEL		Imax(cd)	497.2	S/MH(C0/180)	0.93
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.05
RATED VOLTAGE(V)	15	TOTAL FLUX(lm)	580.70	$\eta$ UP,DN(C0-180)	0.0,46.9
NOMINAL FLUX(lm)	580.7	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,53.1
LAMPS INSIDE	1	$\eta$ up(%)	0.1	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	15	$\eta$ down(%)	99.9	CIBSE SHR MAX	1.05

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

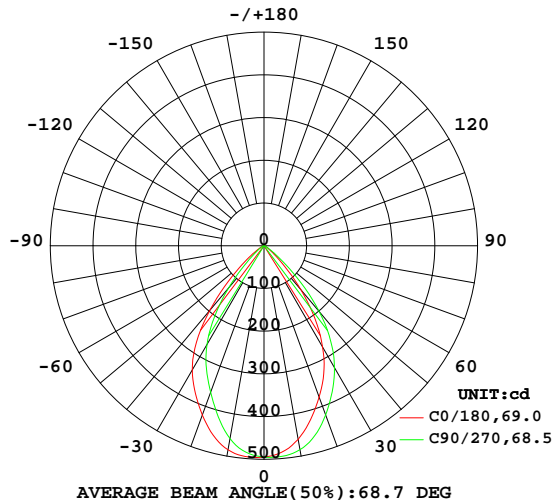

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

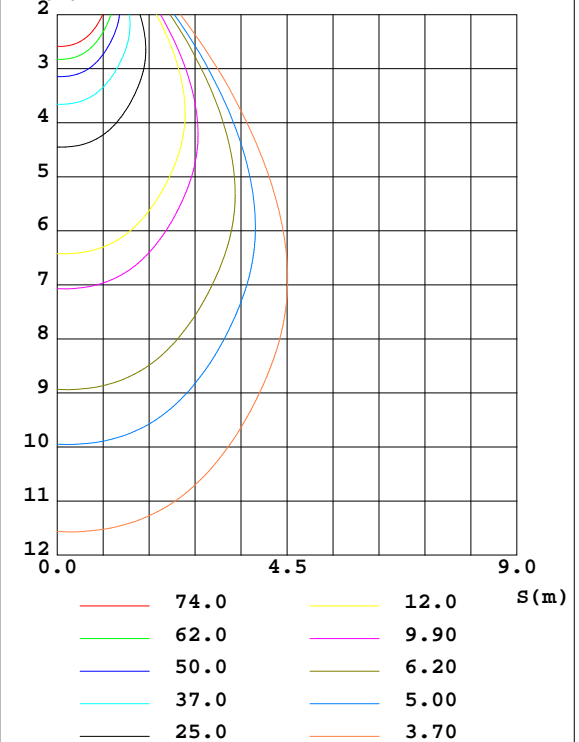

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Oliver  
Test Date:2023-10-18

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity:65.0%  
Test Distance:2.482m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM


## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	$\%lum$
10	485.2	473.3	458.5	449.4	460.2	473.3	484.7	490.1	0- 10	46.20	46.20	7.96
20	421.9	398.7	365.4	353.5	377.3	394.2	421.6	439.2	10- 20	122.7	168.9	29.1
30	335.8	307.2	267.3	249.9	274.9	302.7	330.3	353.3	20- 30	161.4	330.3	56.9
40	197.6	168.9	128.2	108.4	134.9	161.7	202.0	210.1	30- 40	146.8	477.2	82.2
50	60.14	46.62	29.35	23.86	30.67	43.91	58.31	61.00	40- 50	73.74	550.9	94.9
60	13.72	11.60	8.839	7.893	9.012	10.73	11.86	12.64	50- 60	20.02	570.9	98.3
70	4.416	4.059	3.423	3.082	3.548	4.026	4.242	4.428	60- 70	6.652	577.6	99.5
80	0.9846	0.8637	0.7292	0.6331	0.9117	1.036	1.122	1.196	70- 80	2.326	579.9	99.9
90	0.0131	0.0142	0.0133	0.0124	0.0068	0.0069	0.0077	0.0110	80- 90	0.3032	580.2	99.9
100	0.0196	0.0188	0.0192	0.0192	0.0081	0.0081	0.0085	0.0085	90-100	0.0115	580.2	99.9
110	0.0244	0.0285	0.0213	0.0234	0.0154	0.0154	0.0124	0.0111	100-110	0.0160	580.2	99.9
120	0.0319	0.0341	0.0354	0.0367	0.1229	0.0478	0.1212	0.1183	110-120	0.0276	580.3	99.9
130	0.0593	0.0648	0.0686	0.0687	0.1188	0.1067	0.0943	0.0867	120-130	0.0541	580.3	99.9
140	0.0985	0.1076	0.1144	0.1153	0.1895	0.1767	0.1600	0.1533	130-140	0.0859	580.4	99.9
150	0.1506	0.1639	0.1698	0.1691	0.2561	0.2445	0.2320	0.2202	140-150	0.1058	580.5	100
160	0.1971	0.2040	0.2099	0.2049	0.2957	0.2898	0.2841	0.2715	150-160	0.1028	580.6	100
170	0.2253	0.2304	0.2321	0.2258	0.2833	0.2838	0.2850	0.2822	160-170	0.0713	580.7	100
180	0.2619	0.2658	0.2695	0.2646	0.2650	0.2637	0.2700	0.2681	170-180	0.0247	580.7	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Oliver  
 Test Date:2023-10-18

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 $\gamma$  Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity:65.0%  
 Test Distance:2.482m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

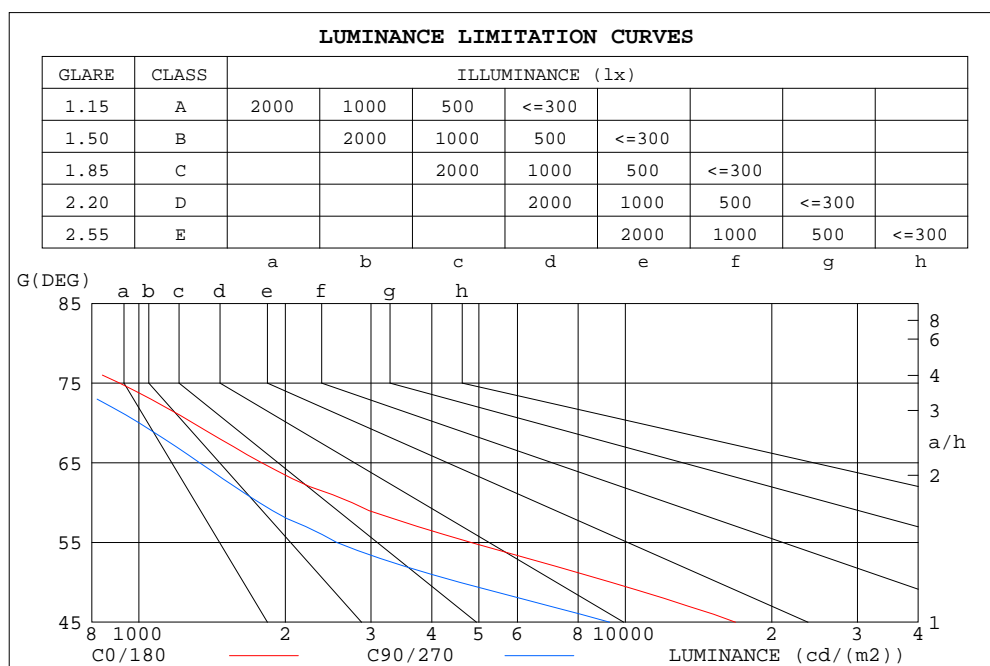


LUMINANCE cd/(m2)		
G( DEG )	C0/180	C90/270
85	253	163
80	567	420
75	913	703
70	1291	1001
65	1789	1334
60	2744	1769
55	4822	2554
50	9358	4568
45	16844	9288

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2023-10-18

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.482m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.03	1.01	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.96	.93	.99	.95	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.93	.87	.83	.92	.86	.82	.89	.85	.81	.86	.83	.80	.84	.81	.78	.77
4.0	.86	.80	.75	.85	.79	.74	.82	.77	.74	.80	.76	.73	.78	.75	.72	.70
5.0	.79	.73	.68	.78	.72	.68	.77	.71	.67	.75	.70	.67	.73	.69	.66	.64
6.0	.74	.67	.62	.73	.67	.62	.71	.66	.62	.70	.65	.61	.68	.64	.61	.59
7.0	.69	.62	.57	.68	.62	.57	.67	.61	.57	.65	.60	.56	.64	.60	.56	.55
8.0	.64	.57	.53	.63	.57	.53	.62	.57	.52	.61	.56	.52	.60	.55	.52	.50
9.0	.60	.53	.49	.59	.53	.49	.58	.53	.49	.57	.52	.48	.56	.52	.48	.47
10.0	.56	.50	.46	.56	.50	.45	.55	.49	.45	.54	.49	.45	.53	.48	.45	.44

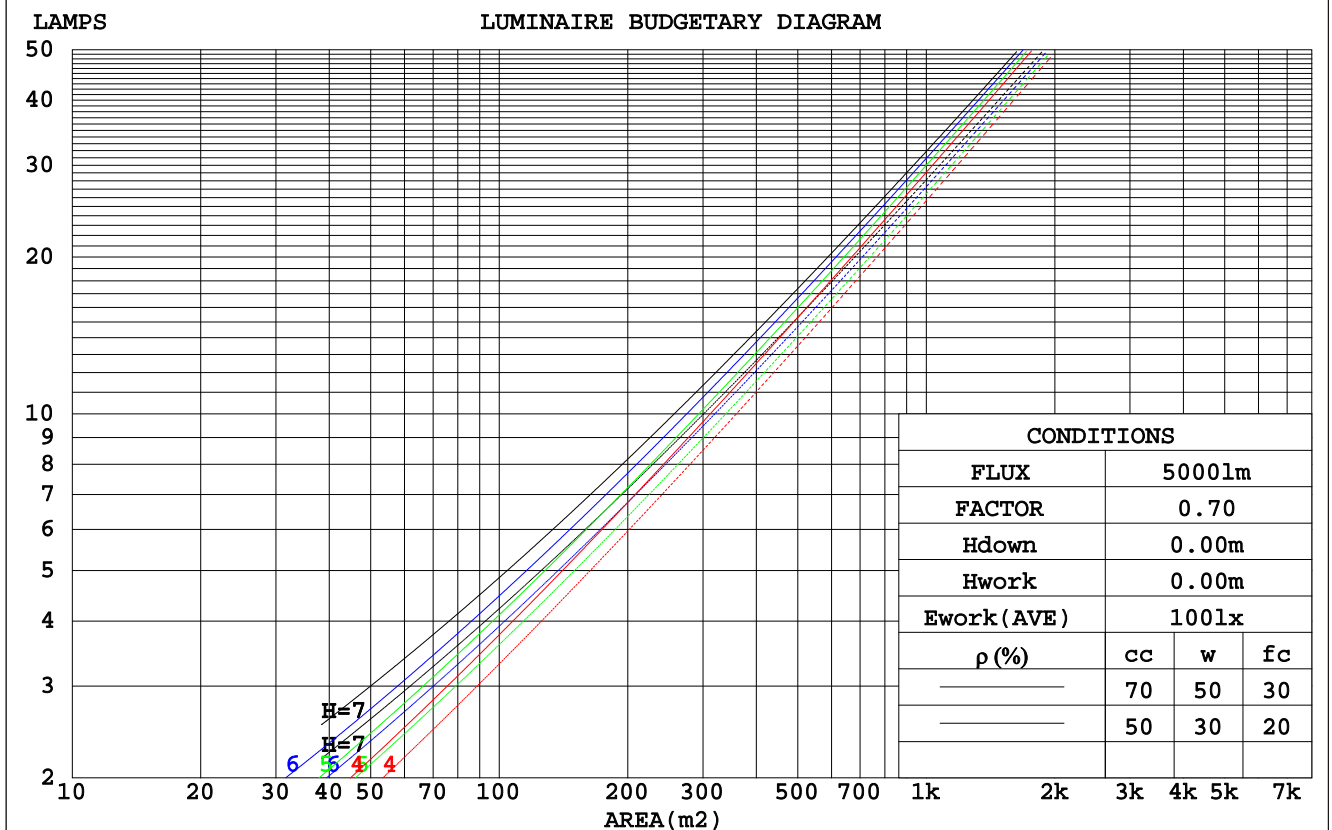

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2023-10-18

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.482m [K=1.0000]  
Remarks:

## WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.197	.112	.035	.190	.108	.034	.177	.102	.032	.166	.095	.031	.155	.090	.029	
2.0	.191	.105	.032	.185	.102	.031	.174	.097	.030	.164	.092	.029	.155	.088	.028	
3.0	.183	.097	.029	.178	.095	.029	.168	.091	.028	.160	.087	.027	.152	.084	.026	
4.0	.174	.090	.027	.170	.089	.026	.162	.086	.026	.154	.083	.025	.147	.080	.024	
5.0	.166	.085	.024	.162	.083	.024	.155	.081	.024	.148	.078	.023	.142	.076	.023	
6.0	.158	.079	.023	.155	.078	.022	.148	.076	.022	.142	.074	.022	.137	.072	.021	
7.0	.151	.074	.021	.148	.074	.021	.142	.072	.021	.137	.070	.020	.132	.068	.020	
8.0	.144	.070	.020	.141	.069	.020	.136	.068	.019	.131	.067	.019	.127	.065	.019	
9.0	.137	.066	.019	.135	.066	.018	.130	.064	.018	.126	.063	.018	.122	.062	.018	
10.0	.131	.063	.017	.129	.062	.017	.125	.061	.017	.121	.060	.017	.118	.059	.017	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.158	.144	.148	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.159	.133	.111	.137	.115	.096	.094	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.148	.114	.087	.127	.099	.076	.087	.069	.053	.050	.040	.031	.016	.013	.010	
4.0	.139	.100	.070	.119	.086	.061	.082	.060	.043	.047	.035	.025	.015	.011	.008	
5.0	.131	.089	.057	.113	.077	.050	.078	.054	.035	.045	.031	.021	.014	.010	.007	
6.0	.124	.080	.048	.107	.069	.042	.074	.048	.029	.043	.028	.018	.014	.009	.006	
7.0	.118	.072	.040	.101	.063	.035	.070	.044	.025	.041	.026	.015	.013	.008	.005	
8.0	.112	.066	.035	.097	.058	.030	.067	.040	.021	.039	.024	.013	.013	.008	.004	
9.0	.107	.061	.030	.092	.053	.026	.064	.037	.019	.037	.022	.011	.012	.007	.004	
10.0	.103	.057	.027	.088	.049	.023	.061	.035	.016	.036	.021	.010	.012	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2023-10-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.482m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.6	19.7	18.8	19.9	20.0	16.8	17.8	17.0	18.0	18.2
3H	18.5	19.5	18.8	19.7	19.9	16.6	17.6	16.9	17.8	18.0
4H	18.4	19.3	18.7	19.6	19.8	16.6	17.5	16.9	17.7	18.0
6H	18.3	19.2	18.6	19.5	19.7	16.5	17.4	16.8	17.6	17.9
8H	18.3	19.1	18.6	19.4	19.7	16.4	17.3	16.8	17.5	17.8
12H	18.2	19.0	18.6	19.3	19.6	16.4	17.2	16.7	17.5	17.8
4H 2H	18.4	19.3	18.7	19.5	19.8	16.6	17.5	16.9	17.7	18.0
3H	18.3	19.1	18.6	19.4	19.6	16.5	17.3	16.8	17.6	17.8
4H	18.2	18.9	18.6	19.2	19.6	16.4	17.1	16.8	17.5	17.8
6H	18.1	18.8	18.5	19.1	19.5	16.3	17.0	16.7	17.3	17.7
8H	18.1	18.7	18.5	19.0	19.4	16.3	16.9	16.7	17.2	17.6
12H	18.0	18.6	18.5	19.0	19.3	16.3	16.8	16.7	17.2	17.6
8H 4H	18.1	18.7	18.5	19.0	19.4	16.3	16.9	16.7	17.2	17.6
6H	18.0	18.5	18.4	18.9	19.3	16.2	16.7	16.7	17.1	17.5
8H	18.0	18.4	18.4	18.8	19.2	16.2	16.6	16.6	17.0	17.5
12H	17.9	18.3	18.4	18.7	19.2	16.1	16.5	16.6	16.9	17.4
12H 4H	18.0	18.6	18.5	18.9	19.3	16.3	16.8	16.7	17.2	17.6
6H	18.0	18.4	18.4	18.8	19.2	16.2	16.6	16.6	17.0	17.5
8H	17.9	18.3	18.4	18.7	19.2	16.1	16.5	16.6	16.9	17.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.3 / - 6.7					+ 2.3 / - 7.0				
1.5H	+ 3.5 / - 6.2					+ 3.3 / - 5.2				
2.0H	+ 5.7 / - 6.5					+ 4.8 / - 4.7				

CIE Pub.117, 580.7 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.9)

Area: 0.01 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2023-10-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.482m [K=1.0000]  
 Remarks:


## UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	80	73	68	80	72	68	79	72	68	64
0.80	89	82	77	88	81	77	87	81	77	72
1.00	95	88	84	94	88	83	92	88	83	78
1.25	100	93	89	98	93	89	96	92	88	83
1.50	103	97	93	102	96	93	99	95	92	87
2.00	106	102	98	105	101	97	102	99	96	90
2.50	108	104	101	107	103	100	104	100	98	91
3.00	110	106	103	108	105	102	105	102	100	93
4.00	113	109	107	110	108	105	107	104	103	95
5.00	114	111	109	112	109	107	108	106	104	96
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2023-10-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.482m [K=1.0000]  
 Remarks:

## ISOCANDELA DIAGRAM

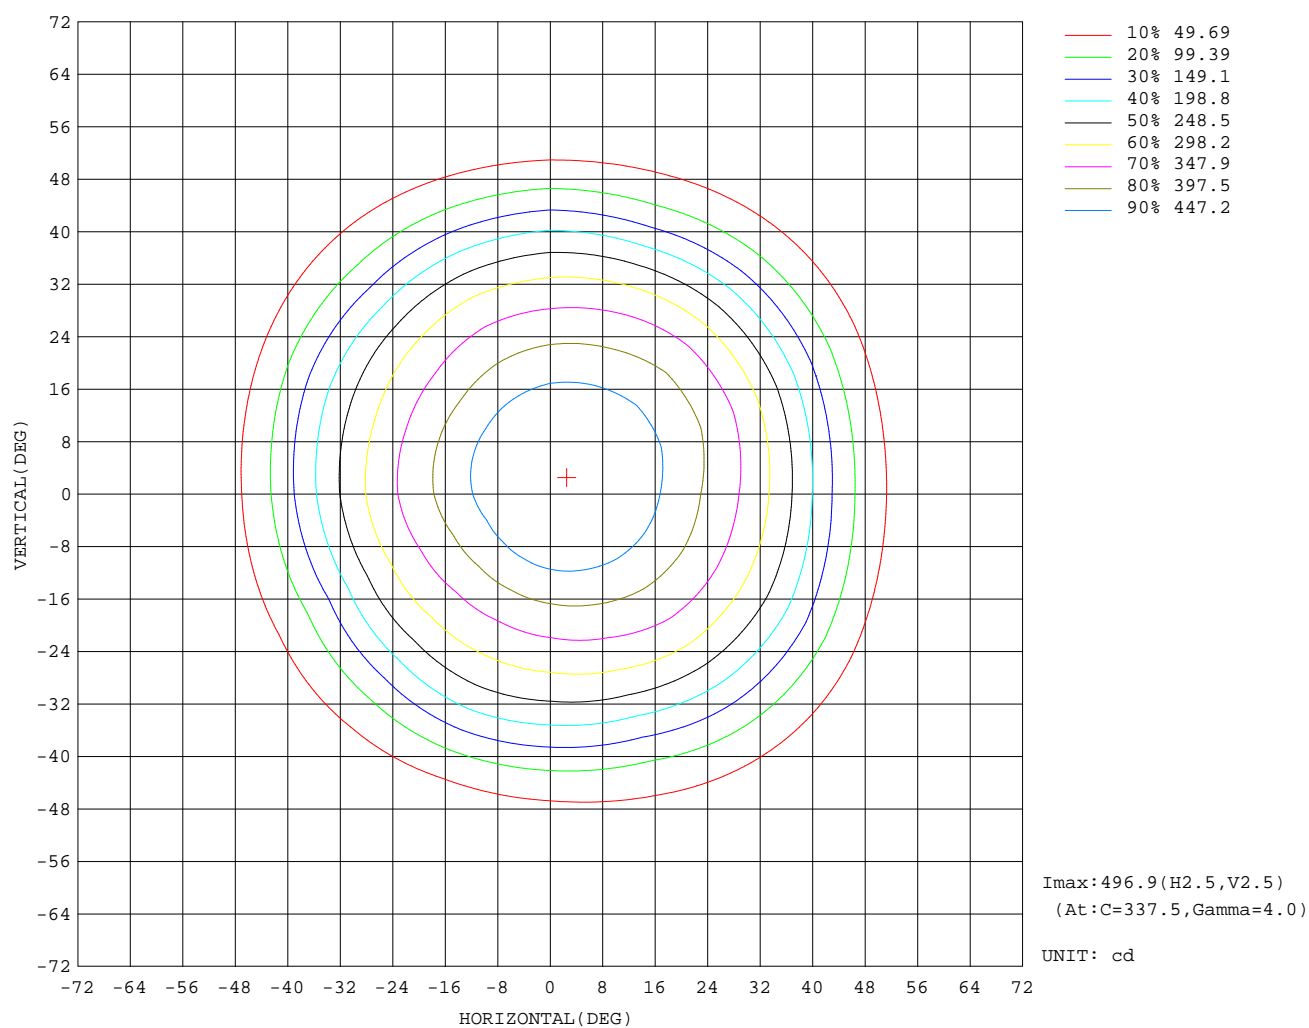


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2023-10-18

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.482m [K=1.0000]  
Remarks:




## AAI Figure

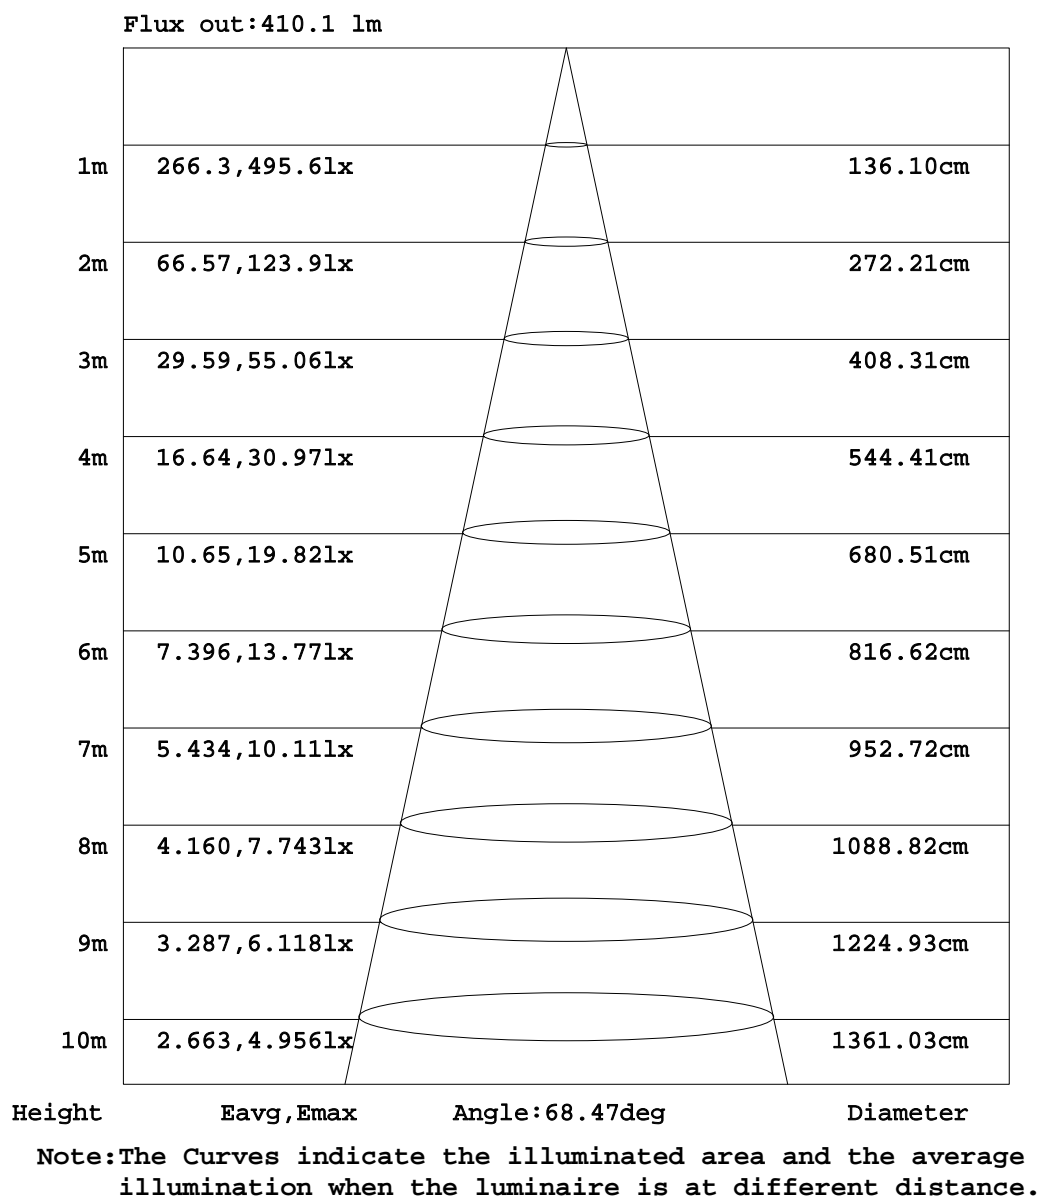

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Oliver  
Test Date:2023-10-18

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity:65.0%  
Test Distance:2.482m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

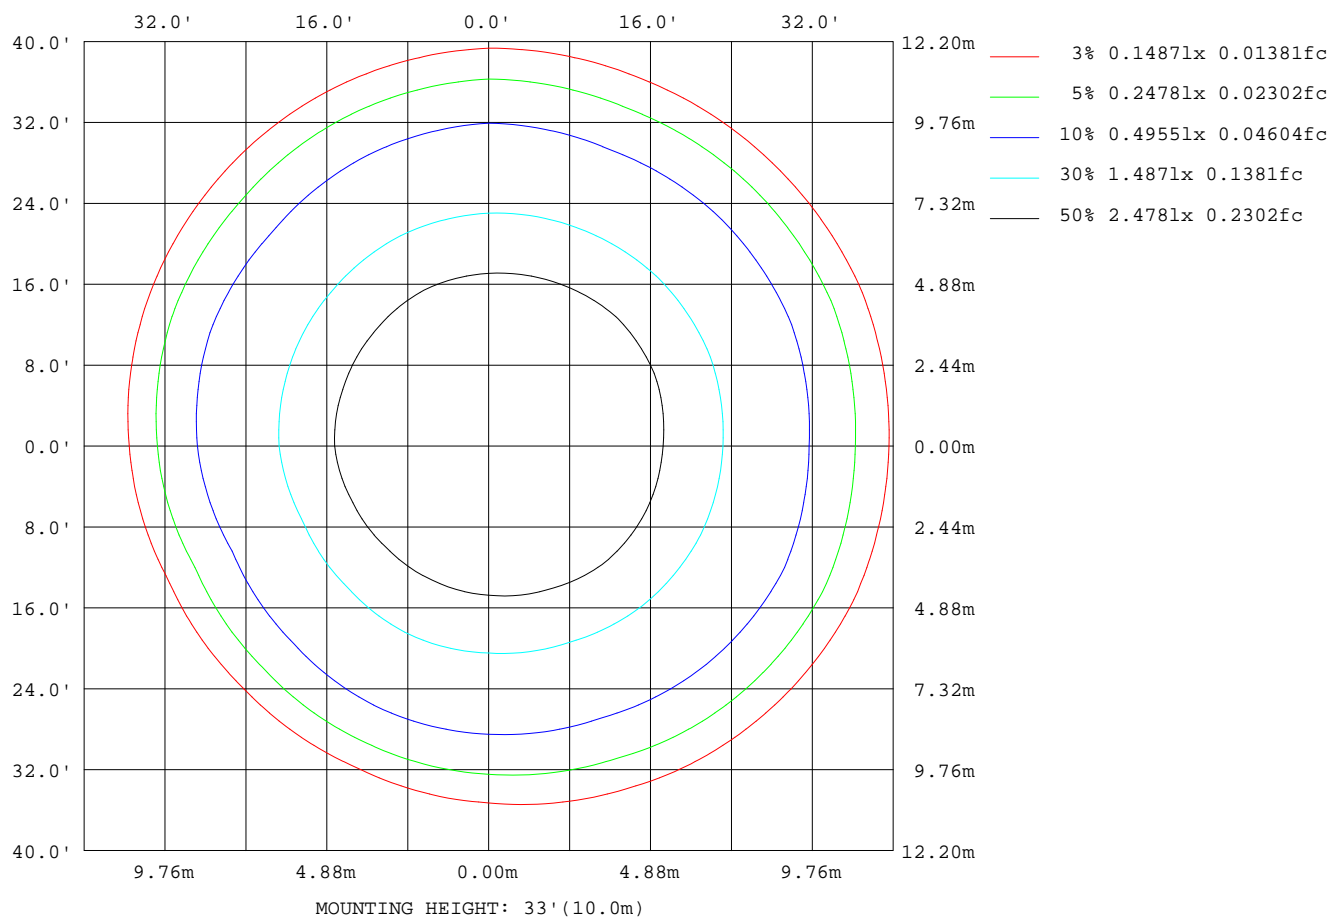

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2023-10-18

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.482m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:13.644V I:1.0332A P:13.946W PF:0.9893 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:580.7x1 lm		
NAME: 5811-70°-6500K-新驱动	TYPE: 固定式灯具	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.: 0.01	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1583
L_0~180(75)av	836
L_0~180(85)av	203
L_90~270(65)av	1499
L_90~270(75)av	810
L_90~270(85)av	197
L_45(65)av	1536
L_45(75)av	820
L_45(85)av	201

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Oliver  
Test Date:2023-10-18

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity:65.0%  
Test Distance:2.482m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

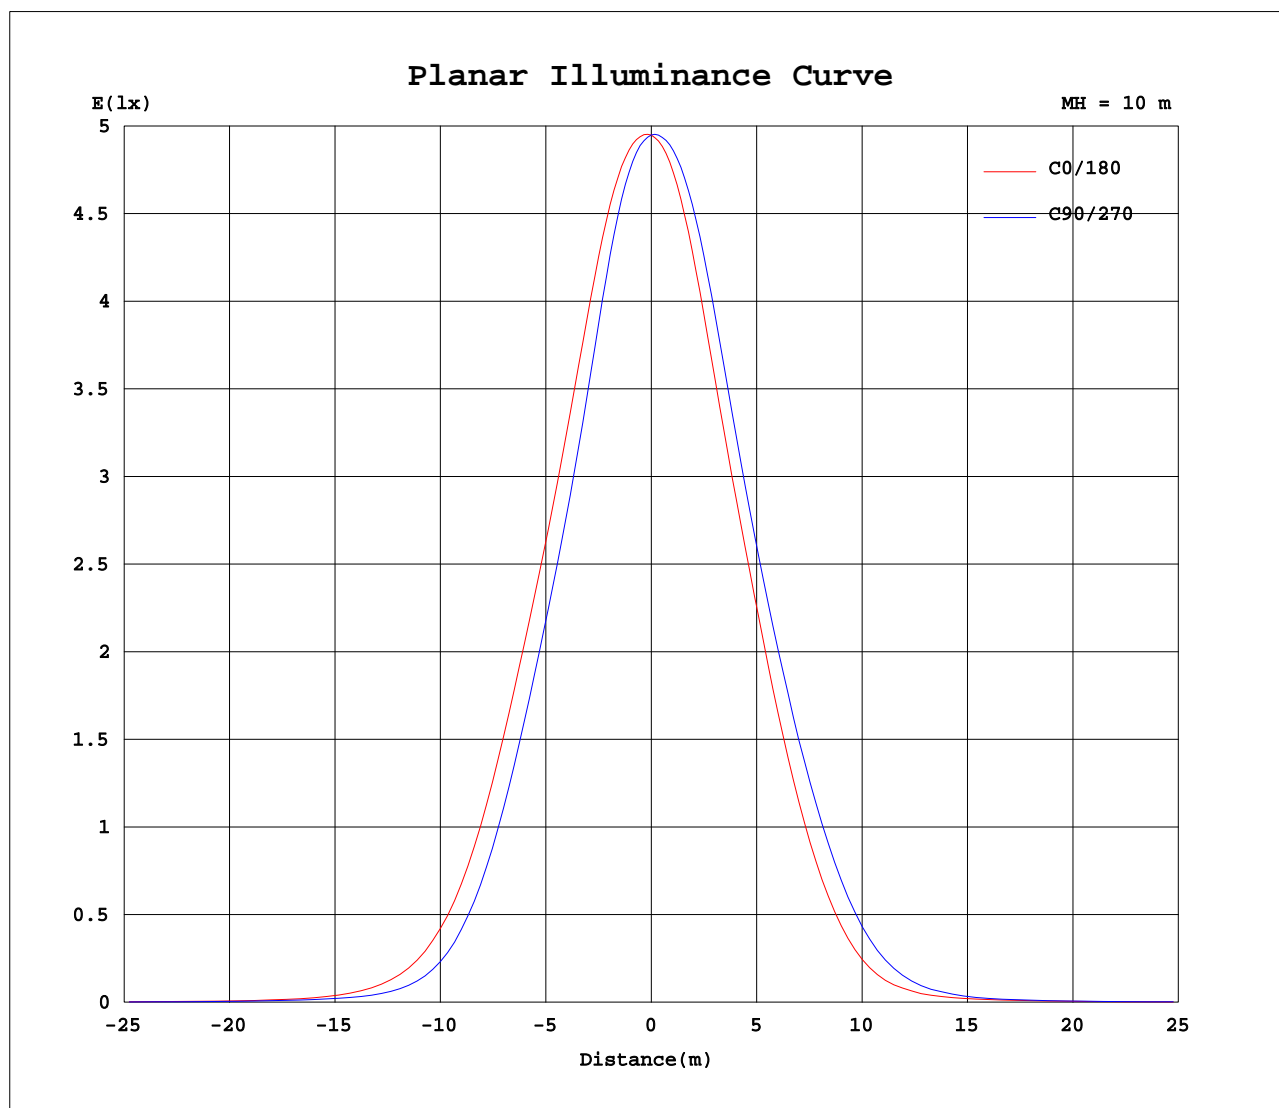

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2023-10-18

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.482m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	495	495	495	495	495	495	495	495	495	495	495	495	495	495	495	495			
5	495	493	491	488	485	483	481	482	485	487	490	493	495	496	497	497			
10	485	480	473	465	459	453	449	451	460	467	473	479	485	488	490	490			
15	459	451	440	426	414	406	402	407	421	431	439	451	460	466	471	469			
20	422	412	399	380	365	356	353	361	377	385	394	410	422	431	439	436			
25	380	371	357	334	319	311	307	313	331	338	350	367	378	388	401	398			
30	336	323	307	282	267	261	250	253	275	286	303	321	330	342	353	352			
35	276	264	243	214	202	196	180	179	208	225	238	259	272	280	289	290			
40	198	193	169	138	128	121	108	108	135	154	162	185	202	200	210	212			
45	119	118	98.1	76.8	65.6	56.9	53.0	54.9	69.3	83.9	91.6	108	122	118	126	130			
50	60.1	56.7	46.6	37.6	29.3	24.0	23.9	25.3	30.7	36.2	43.9	51.4	58.3	58.1	61.0	64.1			
55	27.7	24.8	21.2	18.1	14.6	12.7	12.7	13.3	14.5	16.3	19.9	22.0	25.0	26.9	26.9	28.2			
60	13.7	12.5	11.6	10.1	8.84	7.97	7.89	8.10	9.01	9.67	10.7	11.2	11.9	12.9	12.6	13.0			
65	7.56	7.20	6.87	6.19	5.63	5.14	5.09	5.19	5.82	6.18	6.63	6.75	7.04	7.50	7.38	7.48			
70	4.42	4.23	4.06	3.71	3.42	3.11	3.08	3.12	3.55	3.76	4.03	4.05	4.24	4.49	4.43	4.48			
75	2.36	2.24	2.14	1.97	1.82	1.64	1.62	1.63	1.96	2.08	2.24	2.25	2.38	2.51	2.49	2.53			
80	0.98	0.92	0.86	0.80	0.73	0.65	0.63	0.62	0.91	0.96	1.04	1.05	1.12	1.20	1.20	1.22			
85	0.22	0.20	0.18	0.16	0.14	0.12	0.12	0.11	0.13	0.15	0.17	0.18	0.20	0.22	0.23	0.24			
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
95	0.01	0.01	0.01	0.02	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
100	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
105	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
110	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01			
115	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02			
120	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.03	0.12	0.11	0.05	0.05	0.12	0.10	0.12	0.10			
125	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.08	0.08	0.07	0.07	0.06	0.06	0.06	0.06			
130	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.07	0.12	0.11	0.11	0.10	0.09	0.09	0.09	0.09			
135	0.08	0.08	0.09	0.09	0.10	0.09	0.10	0.09	0.16	0.15	0.14	0.14	0.13	0.12	0.12	0.12			
140	0.10	0.10	0.11	0.11	0.11	0.12	0.12	0.11	0.19	0.19	0.18	0.17	0.16	0.16	0.15	0.16			
145	0.12	0.13	0.14	0.14	0.14	0.14	0.14	0.14	0.22	0.22	0.21	0.20	0.20	0.19	0.19	0.19			
150	0.15	0.16	0.16	0.17	0.17	0.17	0.17	0.17	0.26	0.25	0.24	0.24	0.23	0.22	0.22	0.22			
155	0.18	0.18	0.19	0.19	0.19	0.19	0.19	0.18	0.28	0.28	0.27	0.26	0.26	0.25	0.25	0.24			
160	0.20	0.20	0.20	0.21	0.21	0.21	0.20	0.20	0.30	0.29	0.29	0.29	0.28	0.28	0.27	0.27			
165	0.21	0.21	0.22	0.22	0.22	0.22	0.22	0.21	0.30	0.29	0.29	0.29	0.29	0.29	0.28	0.28			
170	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28			
175	0.25	0.25	0.25	0.26	0.25	0.25	0.25	0.25	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.27			
180	0.26	0.27	0.27	0.27	0.27	0.27	0.26	0.26	0.26	0.26	0.26	0.27	0.27	0.27	0.27	0.27			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2023-10-18

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.482m [K=1.0000]  
 Remarks: