


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.954V I:1.8725A P:24.058W PF:0.9918 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:986.172x1 lm


NAME: 5812-CSBZ-W-MAX	TYPE: Landscape Lighting	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.: 0.005	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 40.99 lm/W			
MODEL		Imax(cd)	763.2	S/MH(C0/180)	0.95
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.04
RATED VOLTAGE(V)	12	TOTAL FLUX(lm)	986.17	η UP,DN(C0-180)	0.0,50.2
NOMINAL FLUX(lm)	986.172	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.7
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	12	η down(%)	99.9	CIBSE SHR MAX	1.05

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

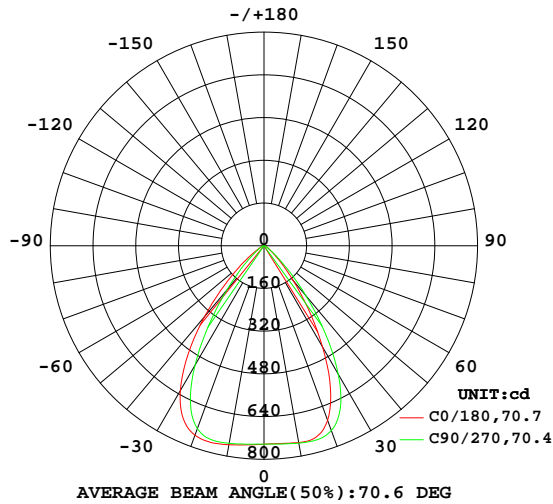

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

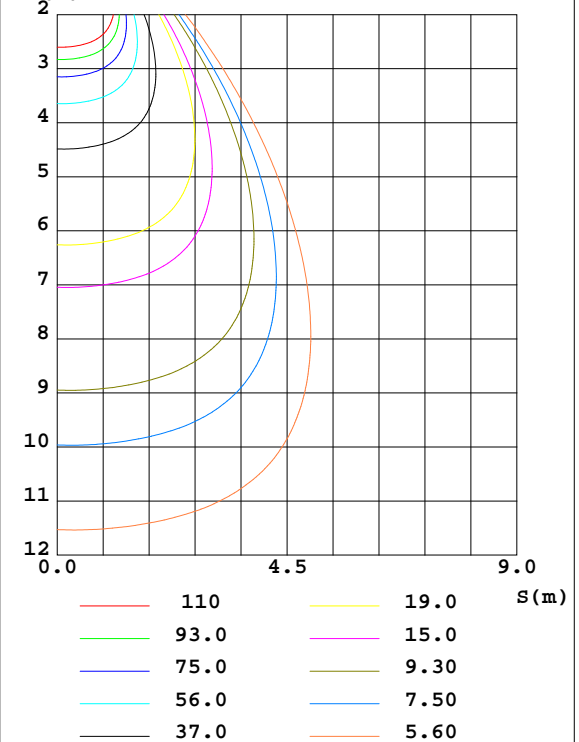

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM


ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\%lum$
10	756.7	755.0	751.5	748.9	748.5	749.4	750.6	753.2	0- 10	71.38	71.38	7.24
20	755.2	749.6	729.3	701.5	696.6	713.0	737.0	753.5	10- 20	212.0	283.4	28.7
30	627.0	597.7	517.2	443.2	440.5	480.1	557.3	624.4	20- 30	297.6	581.0	58.9
40	345.9	302.7	216.0	172.6	172.2	190.3	244.2	331.1	30- 40	240.7	821.8	83.3
50	113.4	90.52	60.94	49.08	47.44	49.87	59.60	91.87	40- 50	110.6	932.4	94.5
60	26.54	23.01	19.42	17.22	17.42	17.18	18.19	22.01	50- 60	33.91	966.3	98
70	9.203	8.753	7.944	7.287	7.664	7.501	7.792	8.587	60- 70	12.97	979.3	99.3
80	2.513	2.377	2.154	1.983	2.312	2.273	2.407	2.656	70- 80	5.099	984.4	99.8
90	0.0106	0.0085	0.0093	0.0093	0.0043	0.0058	0.0109	0.0175	80- 90	0.9936	985.4	99.9
100	0.0192	0.0269	0.0389	0.0192	0.0081	0.0081	0.0077	0.0068	90-100	0.0109	985.4	99.9
110	0.0226	0.0264	0.0367	0.0265	0.0210	0.0188	0.0149	0.0128	100-110	0.0184	985.4	99.9
120	0.0388	0.0396	0.0491	0.0484	0.0947	0.0807	0.0590	0.0493	110-120	0.0369	985.4	99.9
130	0.0792	0.0829	0.1009	0.1074	0.2028	0.1898	0.1661	0.1457	120-130	0.0806	985.5	99.9
140	0.1452	0.1545	0.1768	0.1889	0.3223	0.3118	0.2864	0.2628	130-140	0.1407	985.7	99.9
150	0.2296	0.2470	0.2673	0.2781	0.4165	0.4137	0.3939	0.3695	140-150	0.1736	985.8	100
160	0.3104	0.3255	0.3403	0.3473	0.4768	0.4807	0.4769	0.4529	150-160	0.1681	986.0	100
170	0.3741	0.3886	0.4018	0.3978	0.4764	0.4829	0.4863	0.4802	160-170	0.1193	986.1	100
180	0.4599	0.4742	0.4768	0.4681	0.4568	0.4628	0.4705	0.4704	170-180	0.0428	986.2	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.482m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

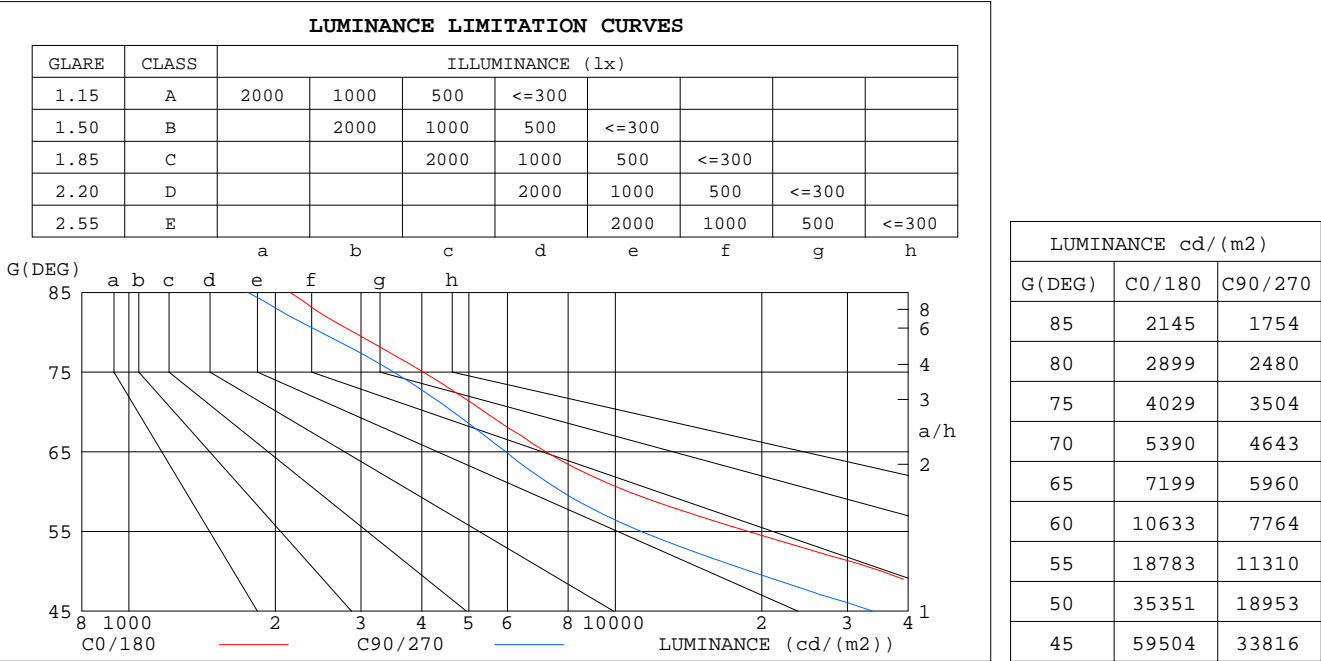


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2023-09-28

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.07	1.04	1.08	1.05	1.03	1.03	1.01	.00	.00	.98	.97	.96	.95	.94	.92
2.0	1.01	.96	.93	.99	.95	.92	.96	.92	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.93	.87	.83	.92	.86	.82	.89	.85	.81	.86	.83	.80	.84	.81	.78	.77
4.0	.86	.80	.75	.85	.79	.75	.82	.78	.74	.80	.76	.73	.78	.75	.72	.70
5.0	.80	.73	.68	.79	.72	.68	.77	.71	.67	.75	.70	.67	.73	.69	.66	.64
6.0	.74	.67	.62	.73	.67	.62	.71	.66	.62	.70	.65	.61	.69	.64	.61	.59
7.0	.69	.62	.57	.68	.62	.57	.67	.61	.57	.65	.60	.57	.64	.60	.56	.55
8.0	.64	.58	.53	.64	.57	.53	.62	.57	.53	.61	.56	.52	.60	.56	.52	.51
9.0	.60	.54	.49	.59	.53	.49	.58	.53	.49	.58	.52	.49	.57	.52	.48	.47
10.0	.56	.50	.46	.56	.50	.46	.55	.49	.45	.54	.49	.45	.53	.49	.45	.44

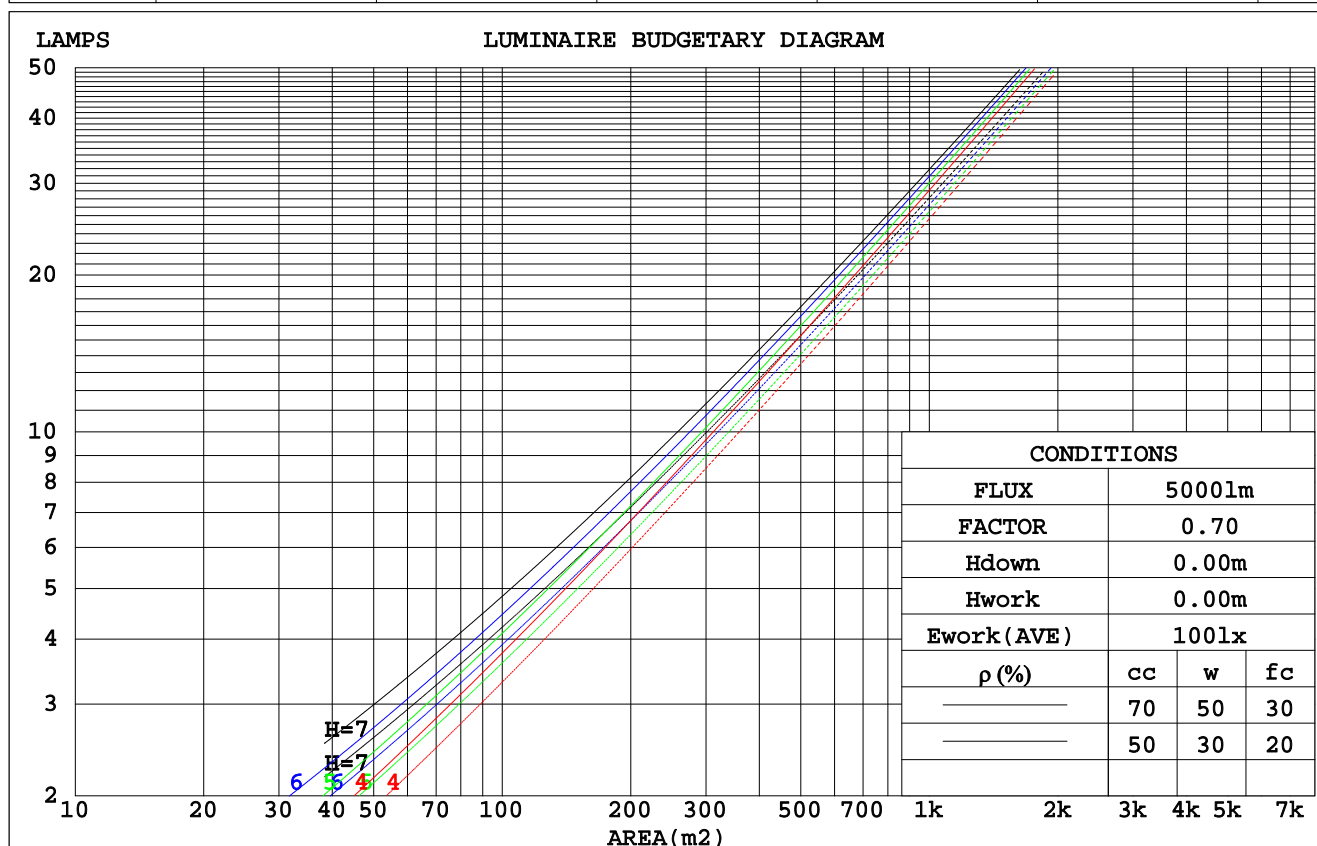

```
C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-09-28
```

```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

```

WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.197	.112	.036	.191	.109	.035	.178	.102	.033	.166	.096	.031	.155	.090	.029		
2.0	.191	.105	.032	.185	.102	.031	.174	.097	.030	.164	.092	.029	.155	.088	.028		
3.0	.182	.097	.029	.177	.095	.029	.168	.091	.028	.159	.087	.027	.151	.084	.026		
4.0	.174	.090	.027	.169	.089	.026	.161	.086	.026	.154	.083	.025	.147	.080	.024		
5.0	.165	.084	.024	.162	.083	.024	.155	.080	.024	.148	.078	.023	.142	.076	.023		
6.0	.158	.079	.023	.154	.078	.022	.148	.076	.022	.142	.074	.022	.137	.072	.021		
7.0	.150	.074	.021	.147	.073	.021	.142	.072	.021	.136	.070	.020	.131	.068	.020		
8.0	.143	.070	.020	.141	.069	.020	.136	.068	.019	.131	.066	.019	.126	.065	.019		
9.0	.137	.066	.019	.135	.066	.018	.130	.064	.018	.126	.063	.018	.122	.062	.018		
10.0	.131	.063	.017	.129	.062	.017	.125	.061	.017	.121	.060	.017	.117	.059	.017		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.173	.158	.144	.148	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016		
2.0	.159	.133	.111	.137	.115	.096	.094	.079	.067	.054	.046	.039	.017	.015	.013		
3.0	.148	.114	.087	.127	.099	.076	.087	.069	.053	.050	.040	.031	.016	.013	.010		
4.0	.139	.100	.070	.119	.086	.061	.082	.060	.043	.047	.035	.025	.015	.011	.008		
5.0	.131	.089	.057	.112	.077	.050	.077	.054	.035	.045	.031	.021	.014	.010	.007		
6.0	.124	.080	.048	.106	.069	.042	.073	.048	.029	.043	.028	.018	.014	.009	.006		
7.0	.118	.072	.040	.101	.063	.035	.070	.044	.025	.041	.026	.015	.013	.008	.005		
8.0	.112	.066	.035	.097	.057	.030	.067	.040	.021	.039	.024	.013	.013	.008	.004		
9.0	.107	.061	.030	.092	.053	.026	.064	.037	.019	.037	.022	.011	.012	.007	.004		
10.0	.102	.057	.027	.088	.049	.023	.061	.035	.016	.036	.021	.010	.012	.007	.003		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.3	24.4	23.6	24.6	24.8	21.7	22.7	21.9	22.9	23.1
3H	23.2	24.2	23.5	24.4	24.6	21.6	22.6	21.8	22.8	23.0
4H	23.2	24.1	23.5	24.3	24.6	21.5	22.5	21.8	22.7	22.9
6H	23.1	24.0	23.4	24.2	24.5	21.4	22.3	21.8	22.6	22.8
8H	23.0	23.9	23.4	24.1	24.4	21.4	22.2	21.7	22.5	22.8
12H	23.0	23.8	23.3	24.1	24.4	21.4	22.2	21.7	22.4	22.7
4H 2H	23.1	24.1	23.4	24.3	24.5	21.5	22.4	21.8	22.7	22.9
3H	23.0	23.8	23.4	24.1	24.4	21.5	22.3	21.8	22.5	22.8
4H	23.0	23.7	23.3	24.0	24.3	21.4	22.1	21.8	22.4	22.7
6H	22.9	23.6	23.3	23.9	24.2	21.3	22.0	21.7	22.3	22.7
8H	22.9	23.5	23.3	23.8	24.2	21.3	21.9	21.7	22.3	22.6
12H	22.8	23.4	23.3	23.8	24.1	21.3	21.8	21.7	22.2	22.6
8H 4H	22.9	23.5	23.3	23.8	24.2	21.3	21.9	21.7	22.2	22.6
6H	22.8	23.3	23.2	23.7	24.1	21.2	21.7	21.7	22.1	22.5
8H	22.8	23.2	23.2	23.6	24.1	21.2	21.6	21.7	22.1	22.5
12H	22.7	23.1	23.2	23.5	24.0	21.2	21.5	21.6	22.0	22.4
12H 4H	22.8	23.4	23.2	23.7	24.1	21.3	21.8	21.7	22.2	22.6
6H	22.8	23.2	23.2	23.6	24.0	21.2	21.6	21.7	22.0	22.5
8H	22.7	23.1	23.2	23.5	24.0	21.2	21.5	21.6	22.0	22.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.3 / - 5.8					+ 2.3 / - 5.8				
1.5H	+ 3.4 / - 5.2					+ 3.3 / - 4.5				
2.0H	+ 5.3 / - 5.6					+ 4.4 / - 3.8				

CIE Pub.117, 986.2 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.0)

Area: 0.005 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.482m [K=1.0000]
 Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	81	73	69	80	73	69	80	73	69	65
0.80	89	82	78	89	82	78	87	81	77	73
1.00	95	89	84	94	88	84	92	88	83	79
1.25	100	94	90	99	93	89	97	92	89	84
1.50	103	98	94	102	97	93	99	95	92	87
2.00	107	102	98	105	101	97	102	99	96	90
2.50	109	104	101	107	103	100	104	100	98	92
3.00	110	106	103	109	105	102	105	102	100	93
4.00	113	109	107	111	108	105	107	105	103	95
5.00	114	111	109	112	109	107	108	106	104	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

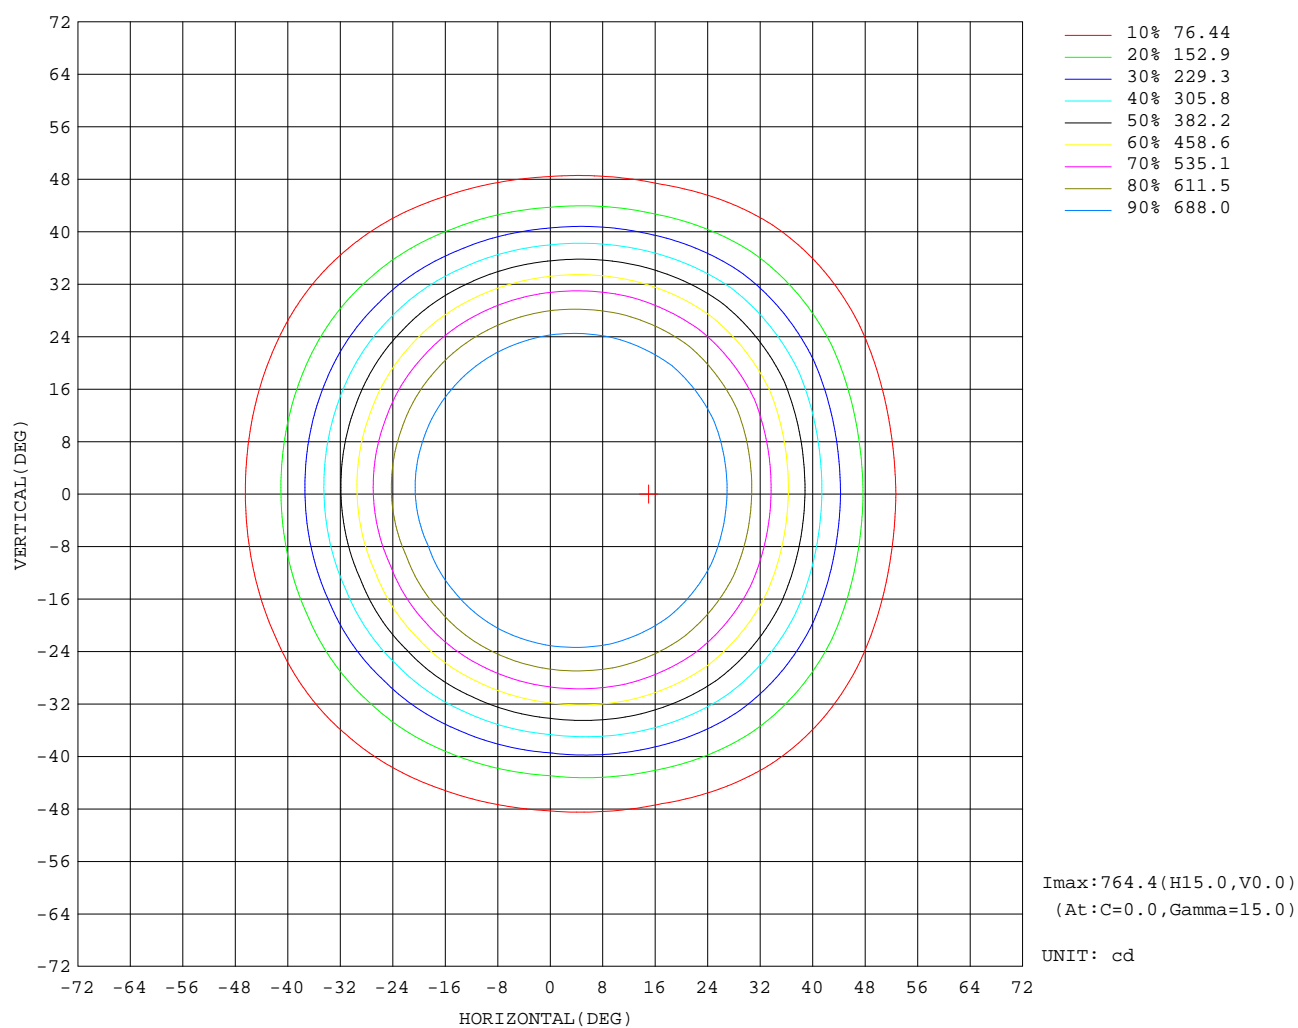

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:


AAI Figure

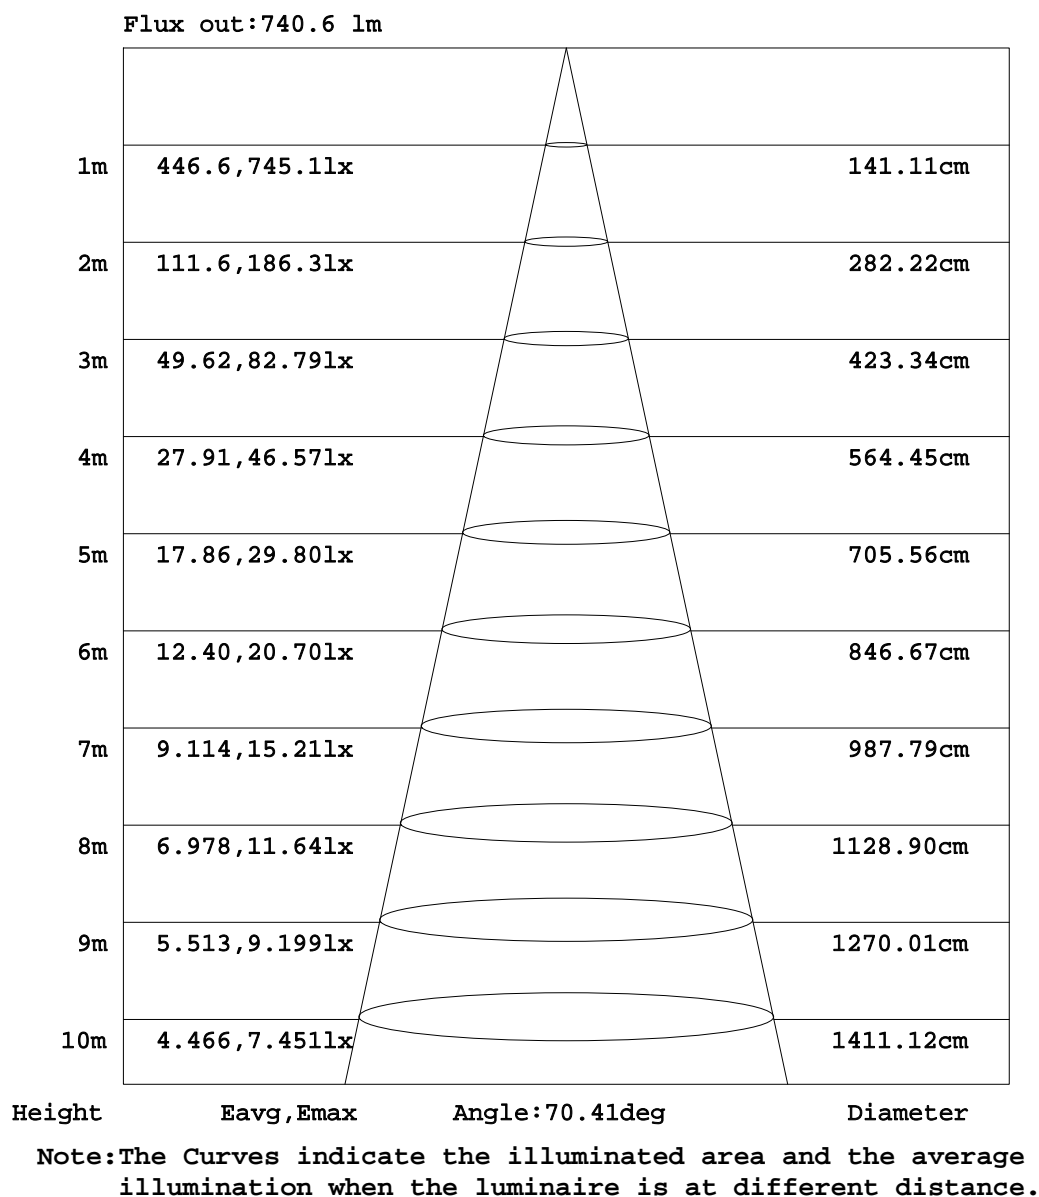

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.482m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

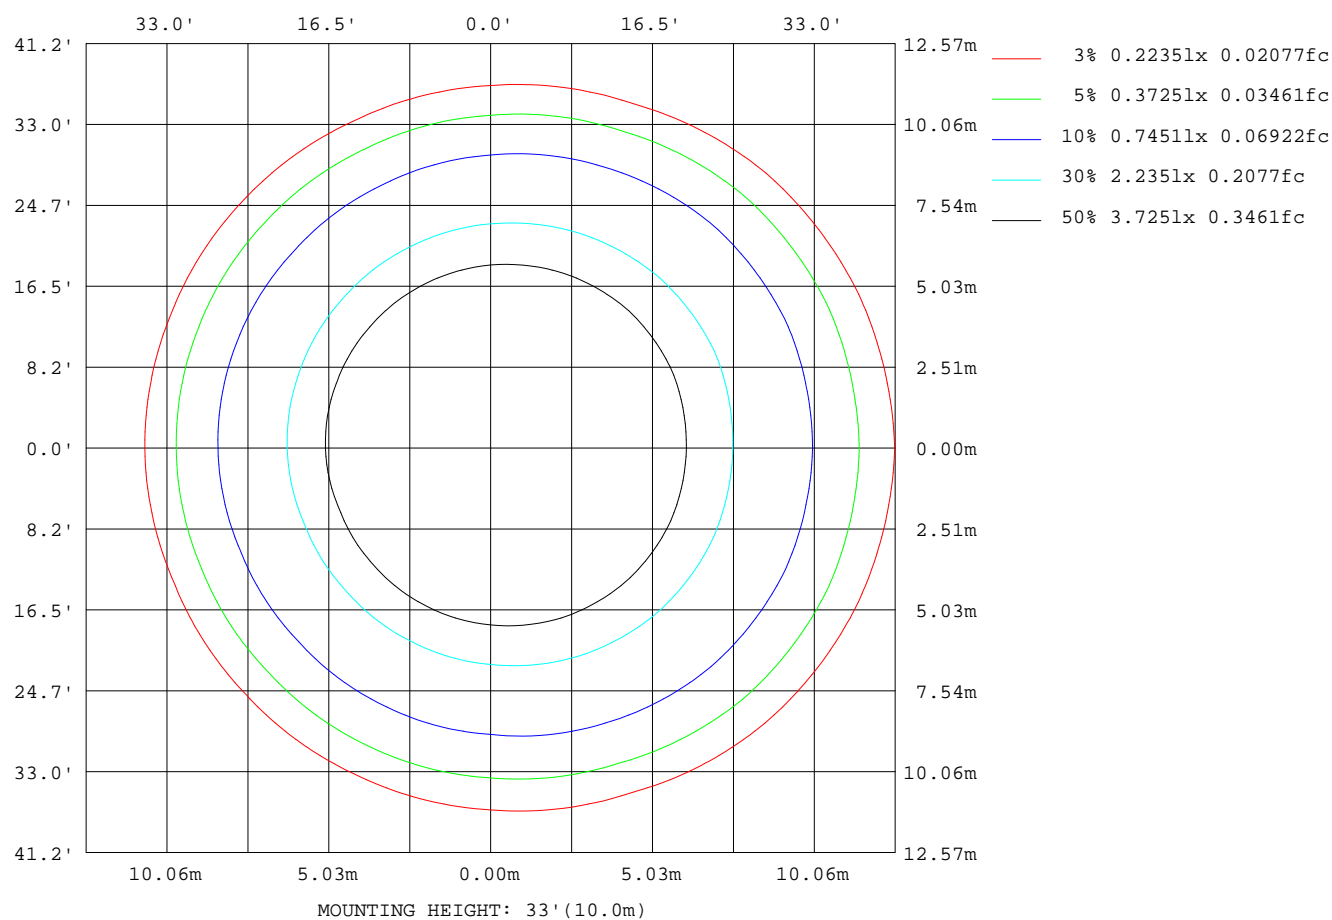

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:12.954V I:1.8725A P:24.058W PF:0.9918 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:986.172x1 lm

NAME: 5812-CSBZ-W-MAX	TYPE: Landscape Lighting	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.: 0.005	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	6396
L_0~180(75)av	3748
L_0~180(85)av	1936
L_90~270(65)av	5837
L_90~270(75)av	3535
L_90~270(85)av	1807
L_45(65)av	5998
L_45(75)av	3597
L_45(85)av	1855

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.482m [K=1.0000]
 Remarks:

Planar Illuminance Curve

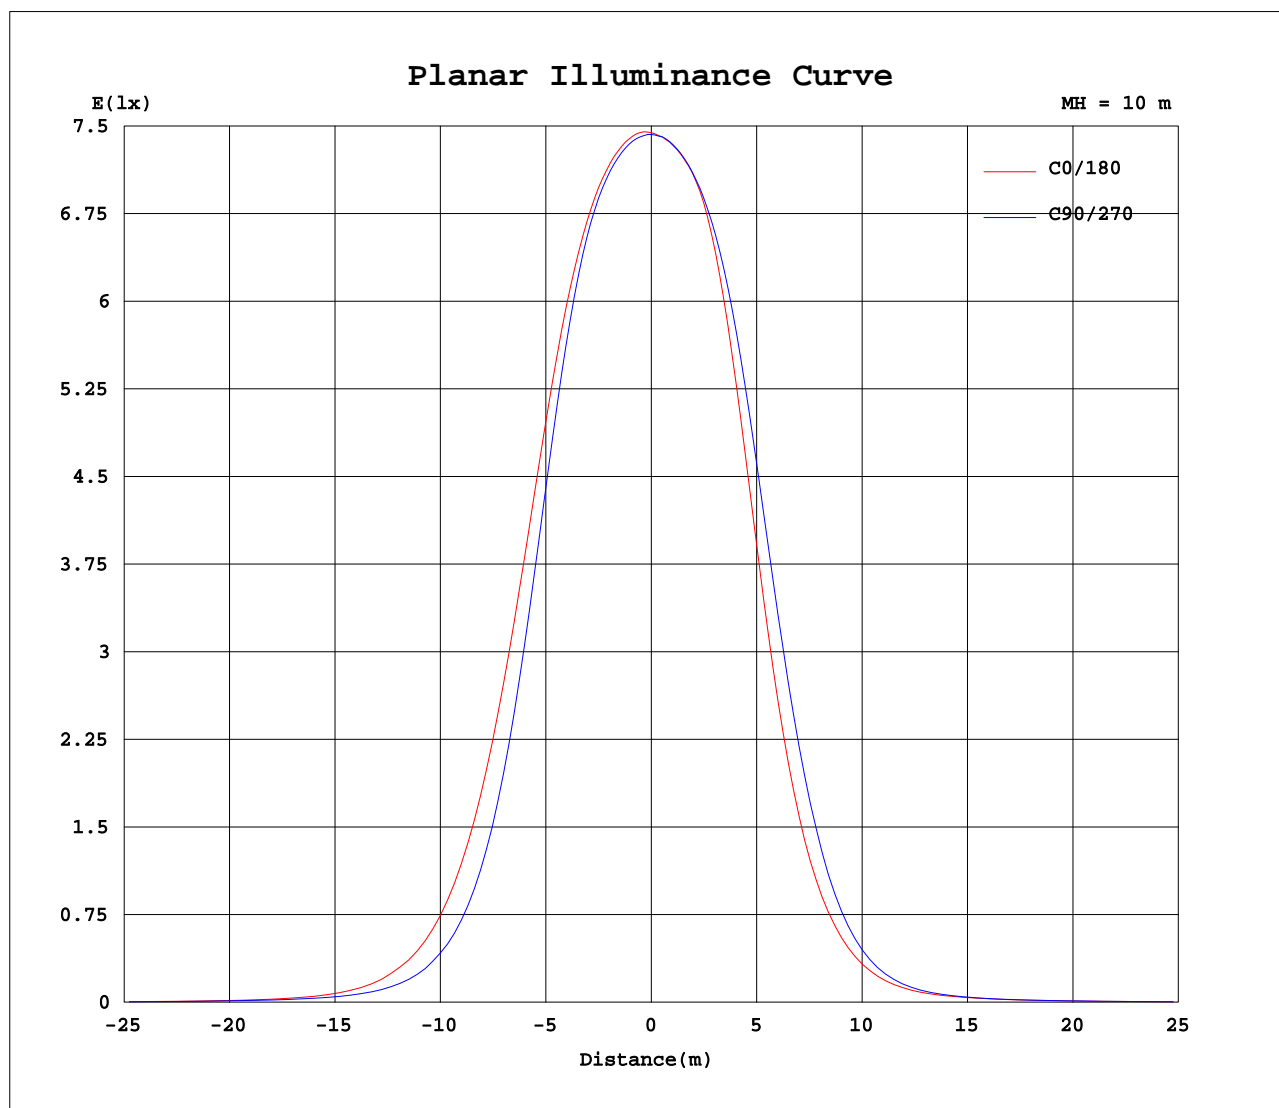

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	743	743	743	743	743	743	743	743	743	743	743	743	743	743	743	743			
5	749	749	748	746	746	745	744	744	744	743	744	744	745	746	747	748			
10	757	756	755	753	751	750	749	749	749	749	749	750	751	752	753	755			
15	763	763	761	757	753	750	745	743	744	746	748	751	753	756	760	762			
20	755	754	750	741	729	716	701	692	697	703	713	726	737	746	754	756			
25	715	711	700	680	652	623	593	580	590	601	622	648	676	698	714	719			
30	627	620	598	563	517	475	443	428	440	455	480	517	557	595	624	636			
35	496	485	455	408	357	318	290	281	291	304	324	357	400	446	488	507			
40	346	334	303	258	216	191	173	167	172	179	190	212	244	288	331	354			
45	210	201	176	142	120	106	94.6	90.5	92.8	95.1	100	110	127	153	189	209			
50	113	107	90.5	70.7	60.9	53.3	49.1	46.2	47.4	47.2	49.9	53.0	59.6	69.9	91.9	107			
55	53.8	49.5	43.5	35.0	32.4	28.7	27.2	25.9	27.1	26.4	27.4	28.4	30.0	32.9	42.0	49.3			
60	26.5	25.0	23.0	20.1	19.4	17.8	17.2	16.9	17.4	16.8	17.2	17.5	18.2	19.1	22.0	25.3			
65	15.2	14.8	14.1	13.0	12.6	11.7	11.4	11.4	11.8	11.4	11.6	11.8	12.1	12.5	13.6	14.7			
70	9.20	9.09	8.75	8.19	7.94	7.47	7.29	7.23	7.66	7.38	7.50	7.61	7.79	8.07	8.59	9.16			
75	5.21	5.15	4.98	4.69	4.54	4.26	4.16	4.11	4.49	4.34	4.42	4.50	4.61	4.79	5.07	5.37			
80	2.51	2.46	2.38	2.24	2.15	2.03	1.98	1.95	2.31	2.26	2.27	2.33	2.41	2.51	2.66	2.80			
85	0.93	0.89	0.85	0.79	0.76	0.71	0.70	0.69	0.75	0.74	0.74	0.76	0.81	0.87	0.95	1.01			
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02			
95	0.01	0.01	0.02	0.01	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
100	0.02	0.02	0.03	0.02	0.04	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
105	0.02	0.02	0.03	0.02	0.04	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
110	0.02	0.02	0.03	0.03	0.04	0.02	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01			
115	0.03	0.03	0.03	0.03	0.04	0.03	0.04	0.04	0.05	0.05	0.04	0.03	0.03	0.03	0.03	0.03			
120	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.09	0.08	0.08	0.07	0.06	0.05	0.05	0.05			
125	0.05	0.05	0.05	0.06	0.07	0.07	0.07	0.08	0.13	0.13	0.12	0.11	0.10	0.10	0.09	0.08			
130	0.08	0.08	0.08	0.09	0.10	0.10	0.11	0.11	0.20	0.20	0.19	0.18	0.17	0.15	0.15	0.14			
135	0.12	0.12	0.12	0.13	0.14	0.14	0.15	0.15	0.27	0.26	0.26	0.24	0.23	0.22	0.20	0.20			
140	0.15	0.15	0.15	0.16	0.18	0.18	0.19	0.19	0.32	0.32	0.31	0.30	0.29	0.27	0.26	0.26			
145	0.18	0.19	0.20	0.21	0.22	0.22	0.23	0.23	0.37	0.37	0.37	0.36	0.34	0.33	0.32	0.31			
150	0.23	0.24	0.25	0.26	0.27	0.27	0.28	0.28	0.42	0.42	0.41	0.41	0.39	0.38	0.37	0.36			
155	0.27	0.28	0.29	0.30	0.31	0.31	0.32	0.31	0.45	0.45	0.45	0.44	0.44	0.43	0.41	0.40			
160	0.31	0.31	0.33	0.33	0.34	0.35	0.35	0.34	0.48	0.48	0.48	0.48	0.48	0.46	0.45	0.44			
165	0.34	0.35	0.36	0.37	0.37	0.37	0.38	0.37	0.49	0.49	0.49	0.50	0.49	0.49	0.48	0.47			
170	0.37	0.38	0.39	0.40	0.40	0.40	0.40	0.40	0.48	0.48	0.48	0.48	0.49	0.48	0.48	0.47			
175	0.43	0.44	0.44	0.45	0.45	0.45	0.45	0.44	0.48	0.48	0.48	0.48	0.49	0.49	0.48	0.47			
180	0.46	0.47	0.47	0.47	0.48	0.47	0.47	0.46	0.46	0.46	0.46	0.47	0.47	0.47	0.47	0.46			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-09-28

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks: