


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:13.645V I:1.0237A P:13.819W PF:0.9893 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:501.264x1 lm


NAME: 5811-70°-2700K-新驱动	TYPE: 固定式灯具	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.: 0.01	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 36.27 lm/W			
MODEL		Imax(cd)	472.5	S/MH(C0/180)	0.91
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.01
RATED VOLTAGE(V)	15	TOTAL FLUX(lm)	501.26	η UP,DN(C0-180)	0.0,45.9
NOMINAL FLUX(lm)	501.264	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,54.0
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	15	η down(%)	99.9	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

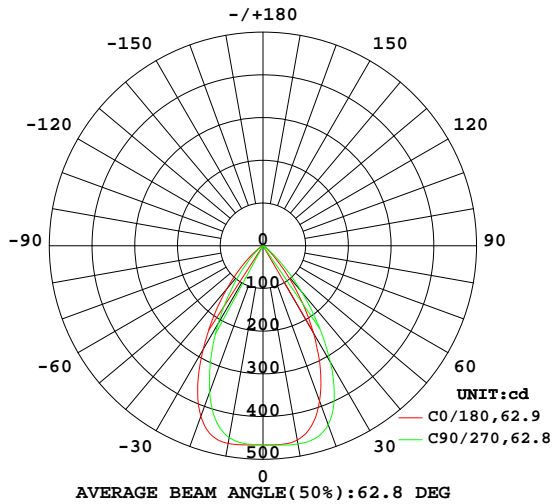

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

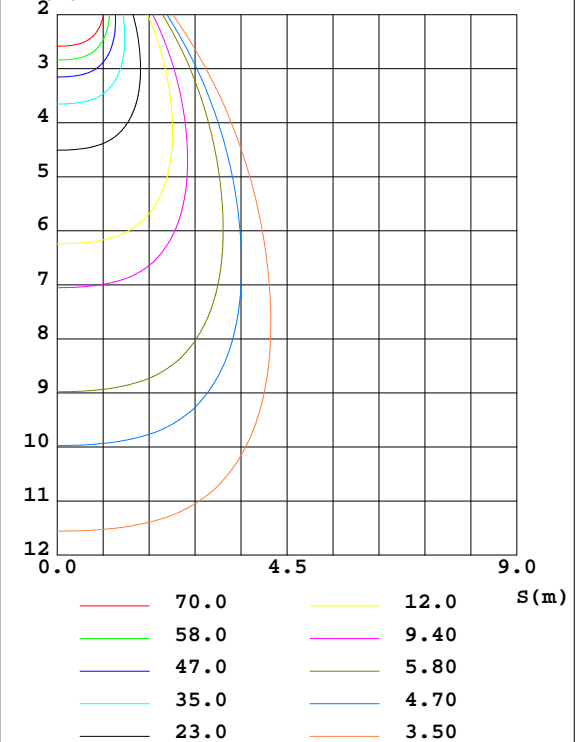

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2023-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM


ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	$\%lum$
10	470.0	462.7	456.0	452.6	461.7	468.5	471.0	471.5	0- 10	44.51	44.51	8.88
20	425.2	391.2	364.8	352.5	387.0	419.9	446.2	451.0	10- 20	124.5	169.0	33.7
30	280.3	242.8	210.5	206.8	237.4	273.1	316.5	321.3	20- 30	154.0	323.0	64.4
40	132.0	110.1	80.47	75.84	86.01	115.5	140.1	142.8	30- 40	112.8	435.8	86.9
50	38.79	25.48	18.95	15.73	16.95	25.82	31.33	35.43	40- 50	46.13	482.0	96.1
60	8.810	7.216	6.447	5.827	6.498	7.138	7.674	8.461	50- 60	12.33	494.3	98.6
70	3.059	2.716	2.472	2.248	2.629	2.825	3.022	3.183	60- 70	4.639	498.9	99.5
80	0.6882	0.5996	0.5181	0.4683	0.7394	0.7841	0.8591	0.9098	70- 80	1.678	500.6	99.9
90	0.0124	0.0111	0.0115	0.0102	0.0068	0.0069	0.0065	0.0083	80- 90	0.2266	500.8	99.9
100	0.0179	0.0196	0.0179	0.0197	0.0077	0.0072	0.0064	0.0069	90-100	0.0107	500.8	99.9
110	0.0251	0.0210	0.0201	0.0201	0.0132	0.0098	0.0098	0.0098	100-110	0.0146	500.8	99.9
120	0.0260	0.0273	0.0291	0.0312	0.1085	0.0361	0.1099	0.1084	110-120	0.0222	500.9	99.9
130	0.0518	0.0537	0.0590	0.0607	0.0975	0.0867	0.0750	0.0721	120-130	0.0434	500.9	99.9
140	0.0867	0.0951	0.1008	0.1010	0.1675	0.1537	0.1428	0.1379	130-140	0.0736	501.0	99.9
150	0.1349	0.1445	0.1499	0.1493	0.2308	0.2191	0.2071	0.2036	140-150	0.0941	501.1	100
160	0.1787	0.1876	0.1905	0.1865	0.2677	0.2617	0.2553	0.2480	150-160	0.0927	501.2	100
170	0.2094	0.2166	0.2174	0.2118	0.2652	0.2656	0.2665	0.2614	160-170	0.0657	501.2	100
180	0.2491	0.2557	0.2506	0.2489	0.2507	0.2507	0.2511	0.2520	170-180	0.0231	501.3	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2023-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.482m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

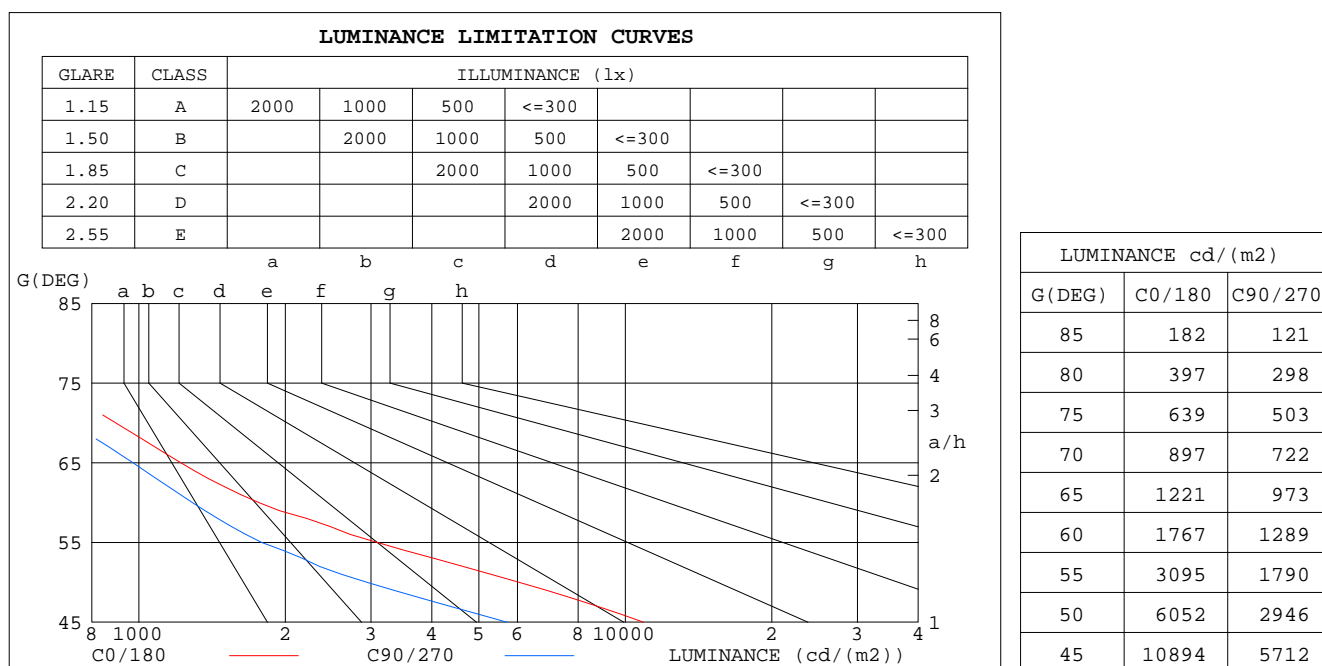


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.00	1.00	.99	.97	.97	.96	.94	.93
2.0	1.02	.98	.94	1.00	.96	.93	.97	.94	.91	.94	.91	.89	.91	.89	.87	.85
3.0	.94	.89	.85	.93	.88	.84	.90	.86	.83	.88	.84	.82	.86	.83	.80	.79
4.0	.88	.82	.77	.86	.81	.77	.84	.80	.76	.82	.78	.75	.80	.77	.74	.73
5.0	.82	.75	.71	.81	.75	.71	.79	.74	.70	.77	.73	.69	.75	.72	.69	.67
6.0	.76	.70	.65	.75	.69	.65	.74	.68	.65	.72	.68	.64	.71	.67	.64	.62
7.0	.71	.65	.60	.71	.65	.60	.69	.64	.60	.68	.63	.60	.67	.63	.59	.58
8.0	.67	.60	.56	.66	.60	.56	.65	.60	.56	.64	.59	.55	.63	.59	.55	.54
9.0	.63	.57	.52	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.52	.50
10.0	.59	.53	.49	.59	.53	.49	.58	.52	.49	.57	.52	.49	.56	.52	.48	.47

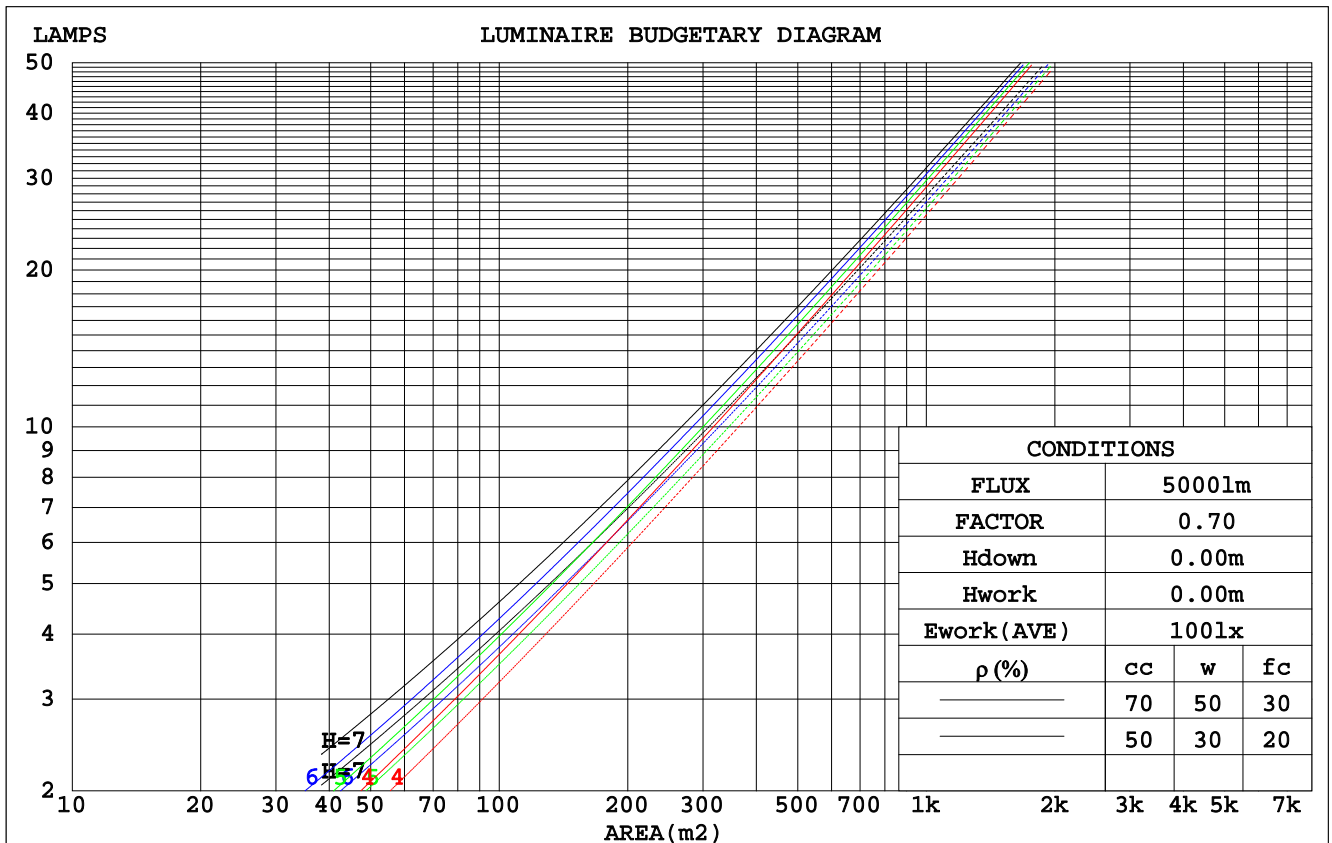

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-10-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.188	.107	.034	.182	.104	.033	.169	.097	.031	.157	.091	.029	.147	.085	.027		
2.0	.182	.100	.031	.176	.097	.030	.165	.092	.029	.155	.087	.027	.146	.083	.026		
3.0	.173	.092	.028	.169	.090	.027	.159	.086	.026	.151	.083	.025	.143	.079	.024		
4.0	.165	.086	.025	.161	.084	.025	.153	.081	.024	.146	.078	.024	.139	.075	.023		
5.0	.158	.080	.023	.154	.079	.023	.147	.076	.023	.140	.074	.022	.134	.072	.022		
6.0	.150	.075	.022	.147	.074	.021	.141	.072	.021	.135	.070	.021	.130	.068	.020		
7.0	.143	.071	.020	.140	.070	.020	.135	.068	.020	.130	.067	.019	.125	.065	.019		
8.0	.137	.067	.019	.134	.066	.019	.129	.065	.018	.125	.063	.018	.121	.062	.018		
9.0	.131	.063	.018	.129	.063	.018	.124	.061	.017	.120	.060	.017	.116	.059	.017		
10.0	.126	.060	.017	.123	.060	.017	.119	.059	.016	.116	.057	.016	.112	.056	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.112	.112	.112	.064	.064	.064	.020	.020	.020	
1.0	.173	.158	.145	.148	.136	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.158	.133	.112	.136	.115	.097	.093	.079	.068	.054	.046	.040	.017	.015	.013	
3.0	.147	.114	.089	.126	.099	.077	.086	.069	.054	.050	.040	.032	.016	.013	.010	
4.0	.137	.100	.071	.117	.086	.062	.081	.060	.044	.047	.035	.026	.015	.011	.009	
5.0	.129	.088	.059	.110	.076	.051	.076	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.121	.079	.049	.104	.069	.043	.072	.048	.030	.042	.028	.018	.013	.009	.006	
7.0	.115	.072	.041	.099	.062	.036	.068	.044	.026	.040	.026	.015	.013	.008	.005	
8.0	.110	.066	.036	.094	.057	.031	.065	.040	.022	.038	.024	.013	.012	.008	.004	
9.0	.105	.061	.031	.090	.053	.027	.062	.037	.019	.036	.022	.011	.012	.007	.004	
10.0	.100	.056	.027	.086	.049	.024	.060	.034	.017	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.1	17.2	16.4	17.3	17.5	14.7	15.7	14.9	15.9	16.1
3H	16.0	17.0	16.3	17.2	17.4	14.6	15.5	14.8	15.7	15.9
4H	16.0	16.8	16.2	17.1	17.3	14.5	15.4	14.8	15.6	15.9
6H	15.9	16.7	16.2	17.0	17.2	14.4	15.3	14.7	15.5	15.8
8H	15.8	16.6	16.2	16.9	17.2	14.4	15.2	14.7	15.4	15.7
12H	15.8	16.6	16.1	16.8	17.1	14.3	15.1	14.7	15.4	15.7
4H 2H	15.9	16.8	16.2	17.0	17.3	14.5	15.4	14.8	15.6	15.8
3H	15.8	16.6	16.2	16.9	17.1	14.4	15.2	14.7	15.4	15.7
4H	15.8	16.5	16.1	16.8	17.1	14.4	15.0	14.7	15.3	15.7
6H	15.7	16.3	16.1	16.6	17.0	14.3	14.9	14.7	15.2	15.6
8H	15.6	16.2	16.0	16.6	16.9	14.2	14.8	14.6	15.1	15.5
12H	15.6	16.1	16.0	16.5	16.9	14.2	14.7	14.6	15.1	15.5
8H 4H	15.6	16.2	16.0	16.6	16.9	14.2	14.8	14.6	15.1	15.5
6H	15.6	16.0	16.0	16.4	16.8	14.2	14.6	14.6	15.0	15.4
8H	15.5	15.9	16.0	16.3	16.8	14.1	14.5	14.6	14.9	15.4
12H	15.5	15.8	15.9	16.3	16.7	14.1	14.4	14.5	14.8	15.3
12H 4H	15.6	16.1	16.0	16.5	16.9	14.2	14.7	14.6	15.1	15.5
6H	15.5	15.9	16.0	16.3	16.8	14.1	14.5	14.6	14.9	15.4
8H	15.5	15.8	15.9	16.3	16.7	14.1	14.4	14.5	14.8	15.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.9 / - 6.7					+ 2.4 / - 6.9				
1.5H	+ 4.4 / - 6.3					+ 3.8 / - 5.4				
2.0H	+ 6.2 / - 5.7					+ 4.9 / - 4.0				

CIE Pub.117, 501.3 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -2.4$)Area: 0.01 m²

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	83	76	72	83	76	72	82	76	72	68
0.80	91	85	81	91	84	80	89	84	80	76
1.00	97	90	86	96	90	86	94	90	86	81
1.25	101	95	92	100	95	91	98	94	90	86
1.50	104	99	95	103	98	95	101	97	94	89
2.00	107	103	99	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

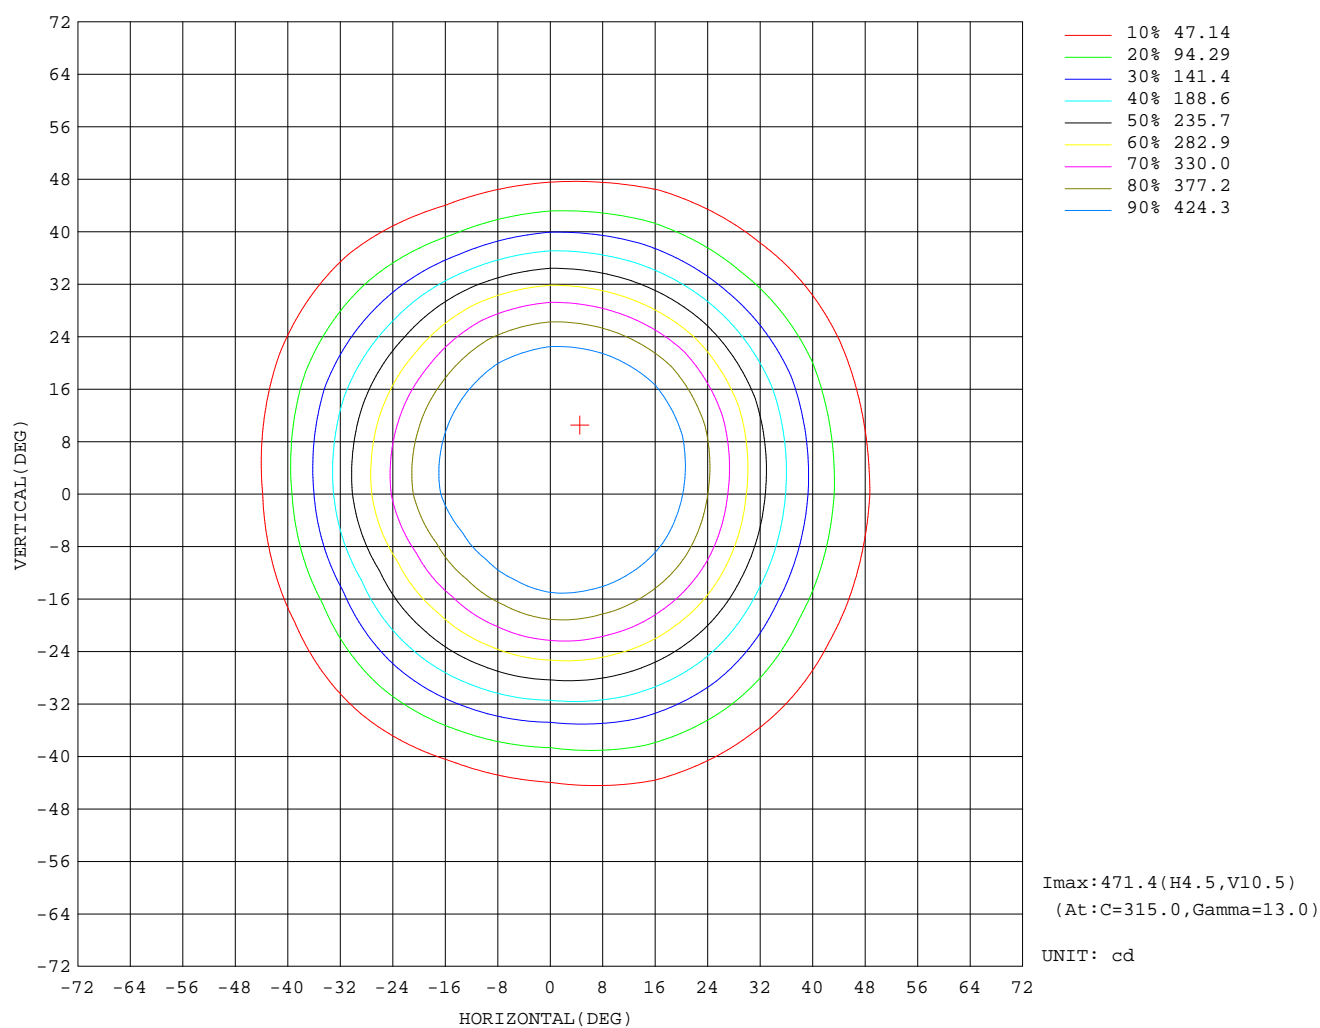

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:


AAI Figure

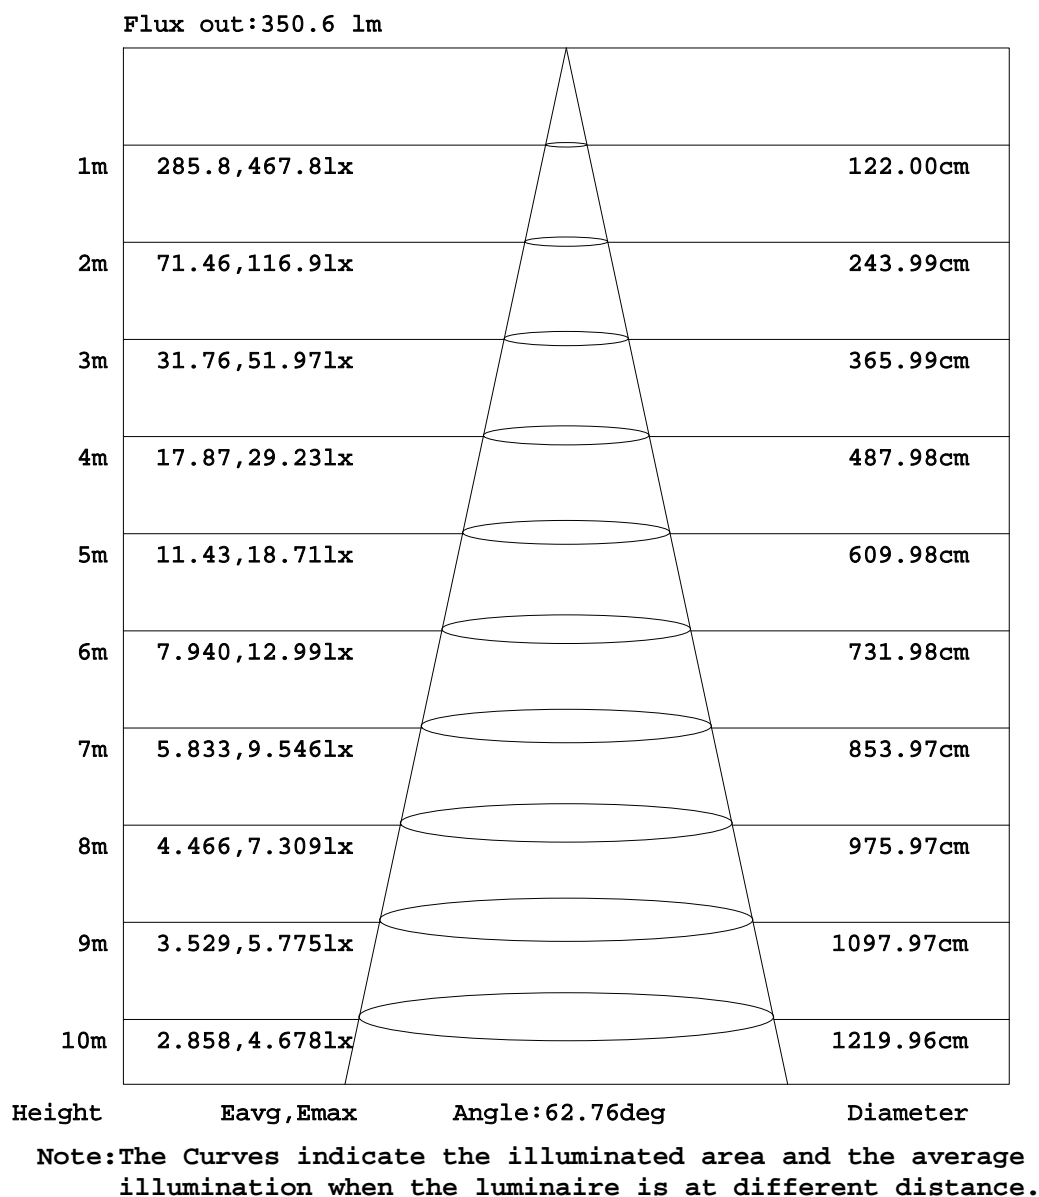

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2023-10-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

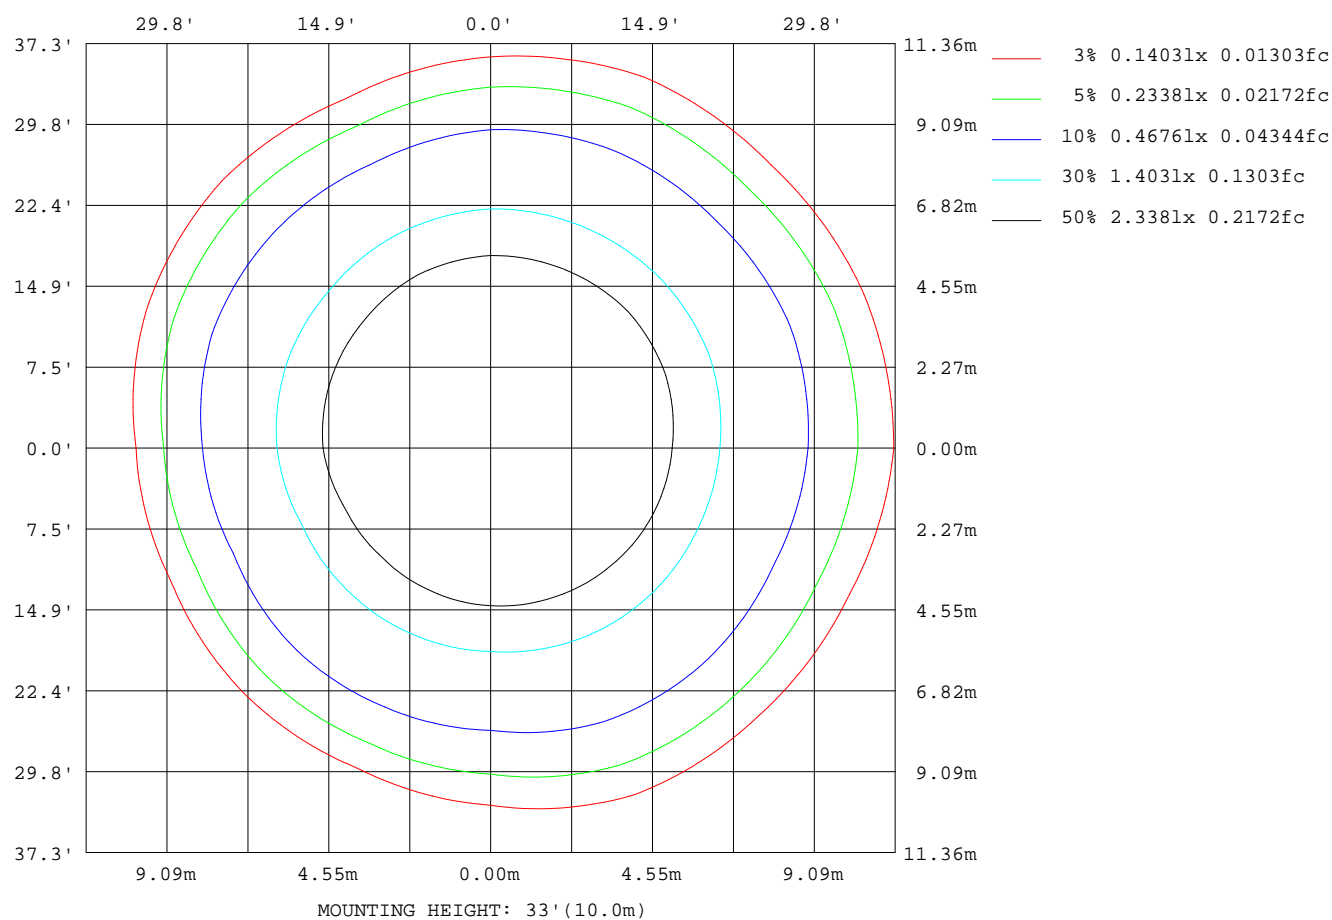

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:13.645V I:1.0237A P:13.819W PF:0.9893 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:501.264x1 lm		
NAME: 5811-70°-2700K-新驱动	TYPE: 固定式灯具	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.: 0.01	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1113
L_0~180(75)av	610
L_0~180(85)av	153
L_90~270(65)av	1065
L_90~270(75)av	590
L_90~270(85)av	143
L_45(65)av	1068
L_45(75)av	588
L_45(85)av	147

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2023-10-18

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.482m [K=1.0000]
Remarks:

Planar Illuminance Curve

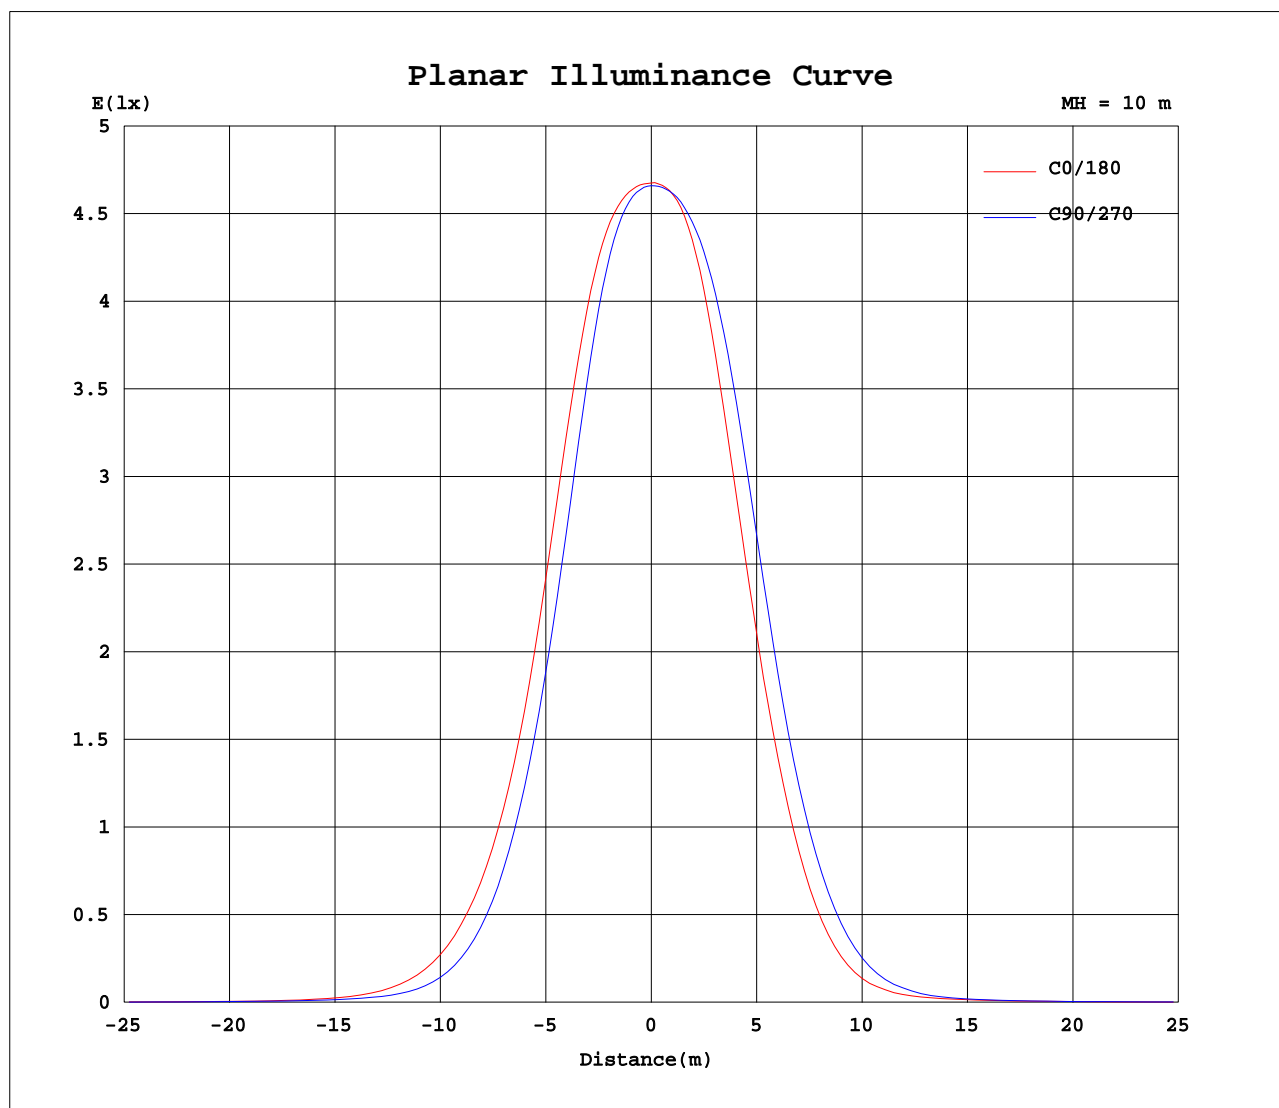

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2023-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.482m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	466	466	466	466	466	466	466	466	466	466	466	466	466	466	466	466			
5	468	467	467	466	465	465	465	466	467	467	468	468	468	468	468	468			
10	470	467	463	459	456	453	453	456	462	465	468	470	471	471	472	471			
15	460	452	441	431	425	416	415	422	437	447	457	464	468	470	471	468			
20	425	410	391	375	365	355	353	363	387	402	420	437	446	450	451	443			
25	362	342	320	301	288	281	279	289	317	336	356	381	395	398	400	388			
30	280	261	243	226	210	207	207	211	237	256	273	300	316	319	321	308			
35	201	182	173	159	139	137	138	135	157	179	189	207	225	228	228	222			
40	132	115	110	100.0	80.5	75.0	75.8	72.6	86.0	108	116	121	140	145	143	146			
45	76.8	63.2	57.5	53.7	40.4	33.5	34.2	33.4	38.4	51.6	58.3	57.9	71.6	79.7	76.7	82.7			
50	38.8	30.2	25.5	24.8	18.9	15.7	15.7	15.5	17.0	21.4	25.8	25.5	31.3	37.3	35.4	38.4			
55	17.7	14.2	12.4	12.2	10.3	9.27	9.07	8.97	9.77	10.8	11.8	11.8	13.3	16.4	15.7	16.5			
60	8.81	7.84	7.22	6.99	6.45	6.00	5.83	5.82	6.50	6.84	7.14	7.22	7.67	8.64	8.46	8.62			
65	5.14	4.81	4.52	4.39	4.11	3.82	3.73	3.75	4.26	4.45	4.60	4.68	4.89	5.26	5.21	5.25			
70	3.06	2.88	2.72	2.65	2.47	2.29	2.25	2.25	2.63	2.75	2.83	2.88	3.02	3.19	3.18	3.21			
75	1.65	1.54	1.46	1.41	1.30	1.21	1.19	1.17	1.51	1.58	1.61	1.65	1.75	1.83	1.84	1.86			
80	0.69	0.64	0.60	0.58	0.52	0.48	0.47	0.45	0.74	0.77	0.78	0.80	0.86	0.90	0.91	0.93			
85	0.16	0.15	0.13	0.12	0.11	0.10	0.09	0.09	0.11	0.12	0.12	0.13	0.14	0.15	0.16	0.18			
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
95	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
100	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
105	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
110	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			
115	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02			
120	0.03	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.11	0.10	0.04	0.04	0.11	0.09	0.11	0.09			
125	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.06	0.06	0.05	0.05	0.05	0.04	0.04	0.04			
130	0.05	0.05	0.05	0.05	0.06	0.06	0.06	0.05	0.10	0.09	0.09	0.08	0.08	0.07	0.07	0.07			
135	0.07	0.07	0.07	0.08	0.09	0.08	0.08	0.08	0.14	0.13	0.12	0.11	0.11	0.11	0.10	0.11			
140	0.09	0.09	0.10	0.10	0.10	0.10	0.10	0.10	0.17	0.16	0.15	0.15	0.14	0.14	0.14	0.14			
145	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.20	0.20	0.19	0.18	0.17	0.17	0.17	0.17			
150	0.13	0.14	0.14	0.15	0.15	0.15	0.15	0.14	0.23	0.23	0.22	0.21	0.21	0.20	0.20	0.21			
155	0.16	0.16	0.17	0.17	0.17	0.17	0.17	0.16	0.25	0.25	0.24	0.24	0.23	0.23	0.23	0.23			
160	0.18	0.18	0.19	0.19	0.19	0.19	0.19	0.18	0.27	0.27	0.26	0.26	0.26	0.25	0.25	0.25			
165	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.27	0.27	0.27	0.27	0.27	0.26	0.26	0.26			
170	0.21	0.21	0.22	0.22	0.22	0.21	0.21	0.21	0.27	0.26	0.27	0.26	0.27	0.26	0.26	0.26			
175	0.23	0.24	0.24	0.24	0.24	0.24	0.24	0.23	0.26	0.26	0.26	0.26	0.26	0.26	0.26	0.26			
180	0.25	0.25	0.26	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2023-10-18

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.482m [K=1.0000]
 Remarks: