


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:26.794V I:0.1505A P:4.0317W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:384.104x1 lm		
NAME: 7872-6500K	TYPE: Surface-mounted Luminaire	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 95.27 lm/W
MODEL		Imax(cd)	156.9	S/MH(C0/180)	1.20	
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.17	
RATED VOLTAGE(V)	28	TOTAL FLUX(lm)	384.10	$\eta$ UP,DN(C0-180)	0.0,50.8	
NOMINAL FLUX(lm)	384.104	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,49.2	
LAMPS INSIDE	1	$\eta$ up(%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	28	$\eta$ down(%)	100.0	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

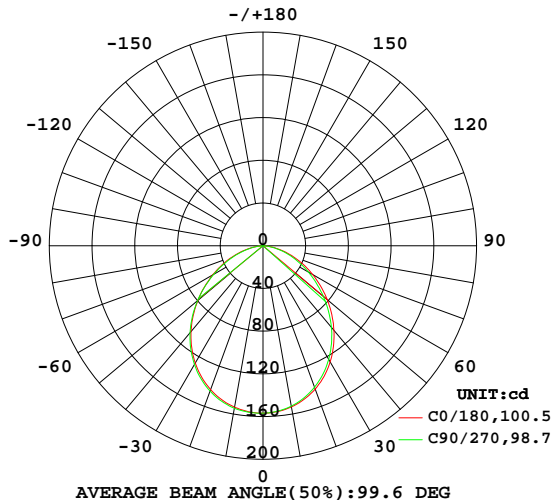

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

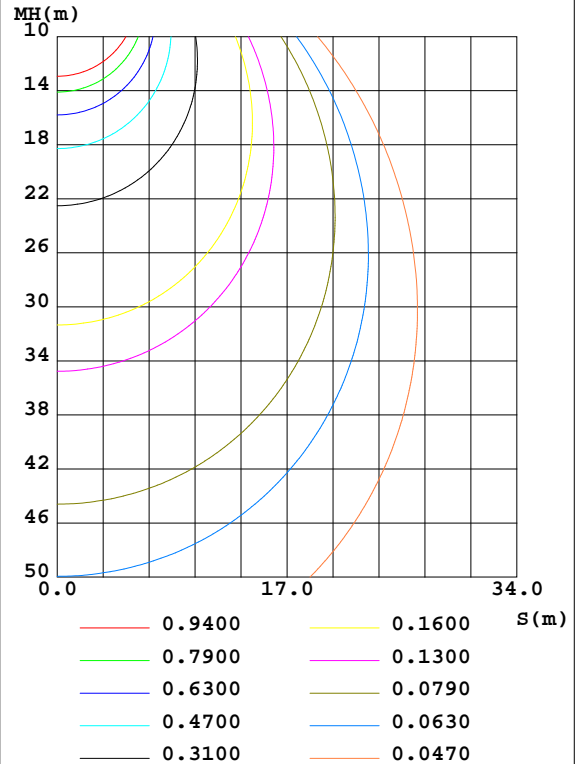

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Oliver  
Test Date:2022-11-22

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity:65.0%  
Test Distance:2.519m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum
10	153.5	154.3	154.4	153.9	153.3	152.7	152.5	152.9	0- 10	14.81	14.81	3.85
20	143.4	144.9	144.9	143.9	142.9	141.5	141.0	142.1	10- 20	42.03	56.83	14.8
30	126.9	128.3	128.4	127.4	125.7	123.6	123.0	124.6	20- 30	62.25	119.1	31
40	104.9	105.8	106.4	105.2	103.4	100.5	99.60	101.7	30- 40	71.99	191.1	49.7
50	79.59	80.08	79.92	79.68	78.50	75.07	73.78	76.51	40- 50	70.06	261.1	68
60	54.16	53.82	53.03	53.48	53.59	50.42	49.00	51.61	50- 60	58.11	319.2	83.1
70	30.70	30.09	28.81	29.68	30.43	28.22	27.13	29.09	60- 70	40.14	359.4	93.6
80	10.99	10.71	9.860	10.33	11.03	10.01	9.526	10.44	70- 80	20.41	379.8	98.9
90	0.0033	0.0100	0	0	0	0.0016	0.0001	0.0027	80- 90	4.246	384.0	100
100	0	0	0	0	0	0	0	0	90-100	0.0001	384.0	100
110	0	0	0	0	0	0	0	0	100-110	0	384.0	100
120	0	0	0	0	0	0	0	0	110-120	0	384.0	100
130	0.0050	0	0.0025	0.0038	0.0072	0.0071	0.0071	0.0063	120-130	0.0005	384.0	100
140	0.0118	0.0106	0.0114	0.0127	0.0317	0.0334	0.0338	0.0309	130-140	0.0102	384.1	100
150	0.0249	0.0249	0.0254	0.0254	0.0464	0.0482	0.0495	0.0474	140-150	0.0181	384.1	100
160	0.0329	0.0330	0.0330	0.0322	0.0498	0.0511	0.0524	0.0525	150-160	0.0184	384.1	100
170	0.0384	0.0389	0.0385	0.0373	0.0481	0.0511	0.0524	0.0529	160-170	0.0123	384.1	100
180	0.0405	0.0401	0.0406	0.0398	0.0396	0.0397	0.0406	0.0398	170-180	0.0042	384.1	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 227.05 lm

%lum = 59.1%

%lamp = 59.1%

Conical surface Flux(120deg): 319.25 lm


%lum = 83.1%

%lamp = 83.1%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Oliver  
 Test Date:2022-11-22

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity:65.0%  
 Test Distance:2.519m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

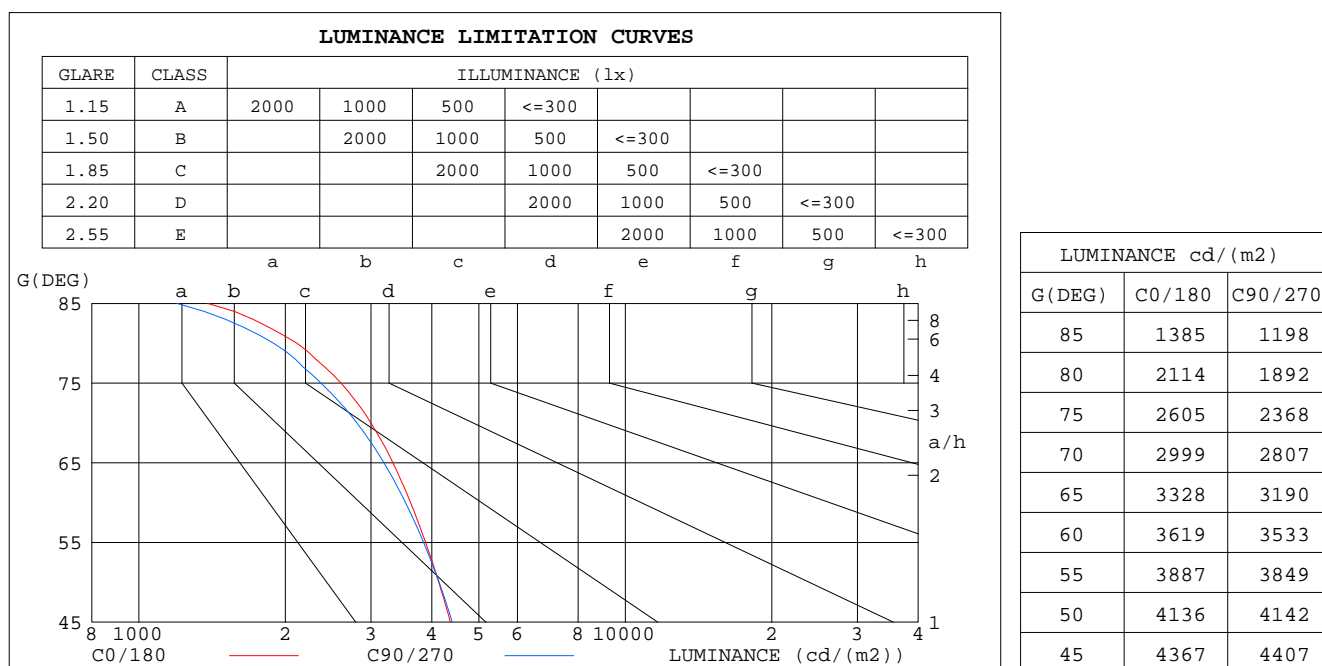


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2022-11-22

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.519m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85
2.0	.92	.86	.81	.91	.85	.80	.87	.82	.78	.84	.80	.76	.81	.77	.74	.72
3.0	.82	.74	.68	.80	.73	.67	.77	.71	.66	.75	.69	.65	.72	.68	.64	.62
4.0	.73	.64	.58	.72	.64	.58	.69	.62	.57	.67	.61	.56	.65	.60	.55	.53
5.0	.65	.57	.50	.64	.56	.50	.62	.55	.50	.60	.54	.49	.58	.53	.48	.46
6.0	.59	.50	.44	.58	.50	.44	.56	.49	.44	.55	.48	.43	.53	.47	.43	.41
7.0	.54	.45	.39	.53	.45	.39	.51	.44	.39	.50	.43	.39	.49	.43	.38	.36
8.0	.49	.41	.35	.48	.41	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.33
9.0	.45	.37	.32	.45	.37	.32	.43	.36	.32	.42	.36	.31	.41	.36	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.38	.33	.28	.27

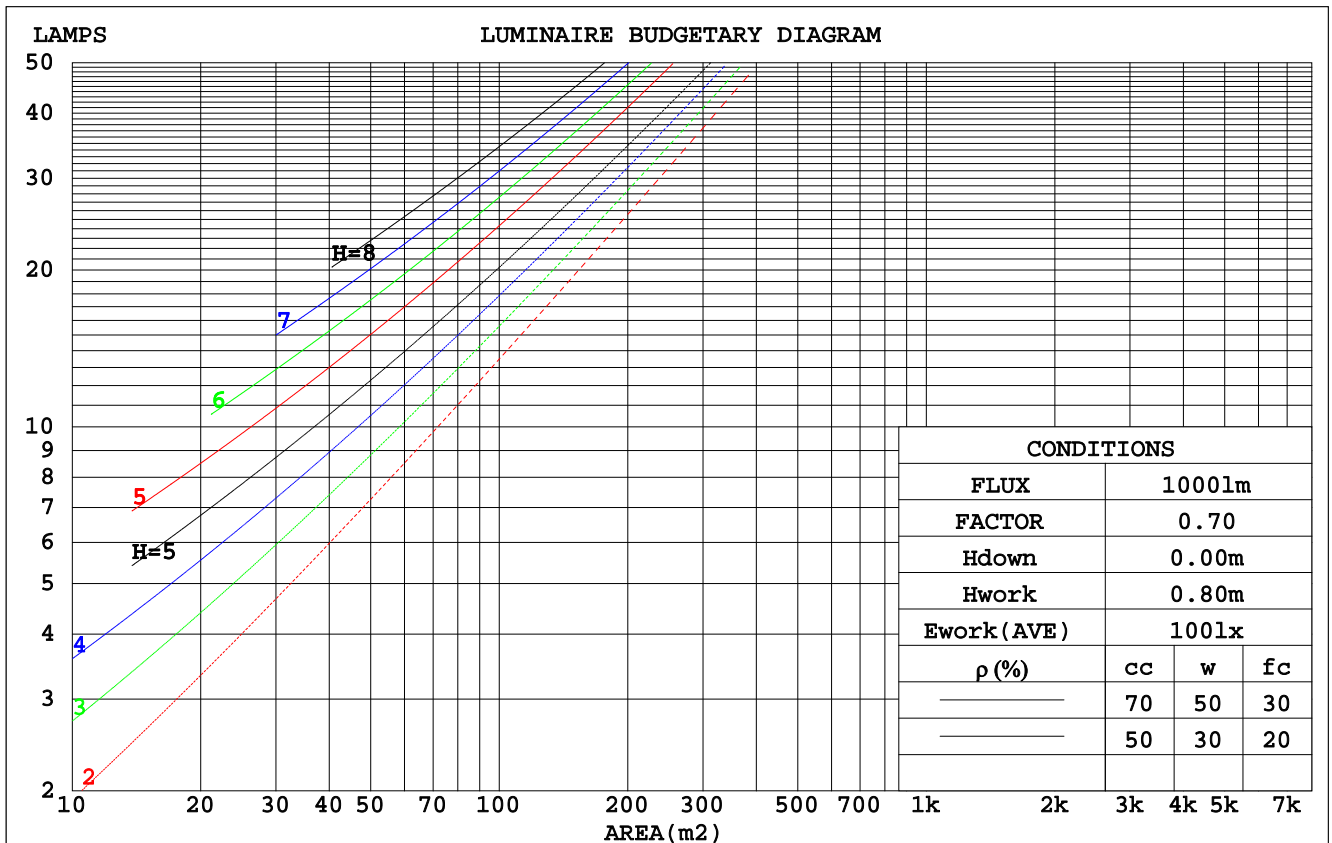

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2022-11-22

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.519m [K=1.0000]  
 Remarks:

## WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.285	.162	.051	.278	.159	.050	.265	.152	.049	.253	.146	.047	.242	.140	.045	
2.0	.273	.149	.046	.266	.147	.045	.255	.142	.044	.244	.137	.043	.234	.133	.042	
3.0	.255	.136	.041	.249	.134	.040	.239	.130	.039	.230	.126	.039	.221	.122	.038	
4.0	.237	.123	.036	.232	.121	.036	.223	.118	.035	.215	.115	.035	.207	.112	.034	
5.0	.220	.112	.033	.216	.111	.032	.208	.108	.032	.201	.106	.031	.194	.103	.031	
6.0	.205	.103	.029	.201	.102	.029	.194	.100	.029	.188	.098	.029	.182	.096	.028	
7.0	.192	.095	.027	.188	.094	.027	.182	.092	.027	.176	.090	.026	.171	.089	.026	
8.0	.180	.088	.025	.177	.087	.025	.171	.085	.024	.166	.084	.024	.161	.082	.024	
9.0	.169	.082	.023	.166	.081	.023	.161	.080	.023	.156	.078	.022	.152	.077	.022	
10.0	.159	.076	.021	.157	.076	.021	.152	.075	.021	.148	.073	.021	.144	.072	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.179	.156	.136	.153	.134	.117	.105	.092	.081	.060	.053	.047	.019	.017	.015	
2.0	.170	.132	.100	.145	.114	.087	.100	.079	.061	.057	.046	.036	.018	.015	.012	
3.0	.162	.114	.077	.139	.099	.066	.095	.069	.047	.055	.040	.027	.018	.013	.009	
4.0	.154	.101	.060	.132	.087	.052	.091	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.147	.090	.049	.126	.078	.042	.087	.055	.030	.050	.032	.018	.016	.010	.006	
6.0	.140	.082	.040	.120	.071	.035	.083	.050	.025	.048	.029	.015	.015	.010	.005	
7.0	.133	.075	.034	.114	.065	.030	.079	.046	.021	.046	.027	.013	.015	.009	.004	
8.0	.127	.069	.030	.109	.060	.026	.075	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.121	.064	.026	.104	.056	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	
10.0	.115	.060	.023	.099	.052	.020	.069	.037	.014	.040	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2022-11-22

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.519m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.5	19.0	17.8	19.2	19.4	17.4	18.9	17.7	19.1	19.3
3H	18.7	20.1	19.0	20.3	20.5	18.5	19.9	18.8	20.1	20.4
4H	19.2	20.4	19.5	20.7	20.9	18.9	20.2	19.2	20.5	20.7
6H	19.4	20.6	19.7	20.9	21.2	19.2	20.4	19.5	20.6	20.9
8H	19.5	20.6	19.8	20.9	21.2	19.2	20.4	19.5	20.6	20.9
12H	19.5	20.6	19.8	20.9	21.2	19.2	20.3	19.5	20.6	20.9
4H 2H	18.0	19.3	18.3	19.5	19.8	17.9	19.2	18.2	19.4	19.7
3H	19.4	20.5	19.7	20.8	21.1	19.2	20.3	19.6	20.6	20.9
4H	19.9	20.9	20.3	21.3	21.6	19.7	20.7	20.1	21.1	21.4
6H	20.3	21.2	20.7	21.5	21.9	20.0	20.9	20.4	21.3	21.7
8H	20.4	21.2	20.8	21.6	22.0	20.1	21.0	20.5	21.3	21.7
12H	20.4	21.2	20.9	21.6	22.0	20.1	20.9	20.6	21.3	21.7
8H 4H	20.1	20.9	20.5	21.3	21.7	19.9	20.7	20.3	21.1	21.5
6H	20.6	21.3	21.0	21.7	22.1	20.3	21.0	20.8	21.4	21.9
8H	20.7	21.3	21.2	21.8	22.2	20.5	21.1	20.9	21.5	22.0
12H	20.8	21.3	21.3	21.8	22.3	20.5	21.1	21.0	21.5	22.0
12H 4H	20.1	20.9	20.5	21.2	21.6	19.9	20.7	20.3	21.1	21.5
6H	20.6	21.2	21.1	21.6	22.1	20.4	21.0	20.8	21.4	21.9
8H	20.8	21.3	21.2	21.7	22.2	20.5	21.0	21.0	21.5	22.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.4					+ 0.4 / - 0.4				

CIE Pub.117, 384.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -3.3)

Area: 0.03 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Oliver  
 Test Date:2022-11-22

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity:65.0%  
 Test Distance:2.519m [K=1.0000]  
 Remarks:


## UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	43	60	49	43	59	49	42	36
0.80	70	59	52	69	59	52	68	58	52	45
1.00	79	68	61	78	68	61	75	69	61	54
1.25	86	76	69	84	75	69	82	74	68	61
1.50	91	81	75	89	80	74	86	79	73	66
2.00	97	89	83	95	88	82	92	86	81	73
2.50	101	93	88	99	92	87	95	89	85	77
3.00	104	97	92	102	96	91	98	93	89	81
4.00	107	102	98	105	100	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2022-11-22

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.519m [K=1.0000]  
 Remarks:

## ISOCANDELA DIAGRAM

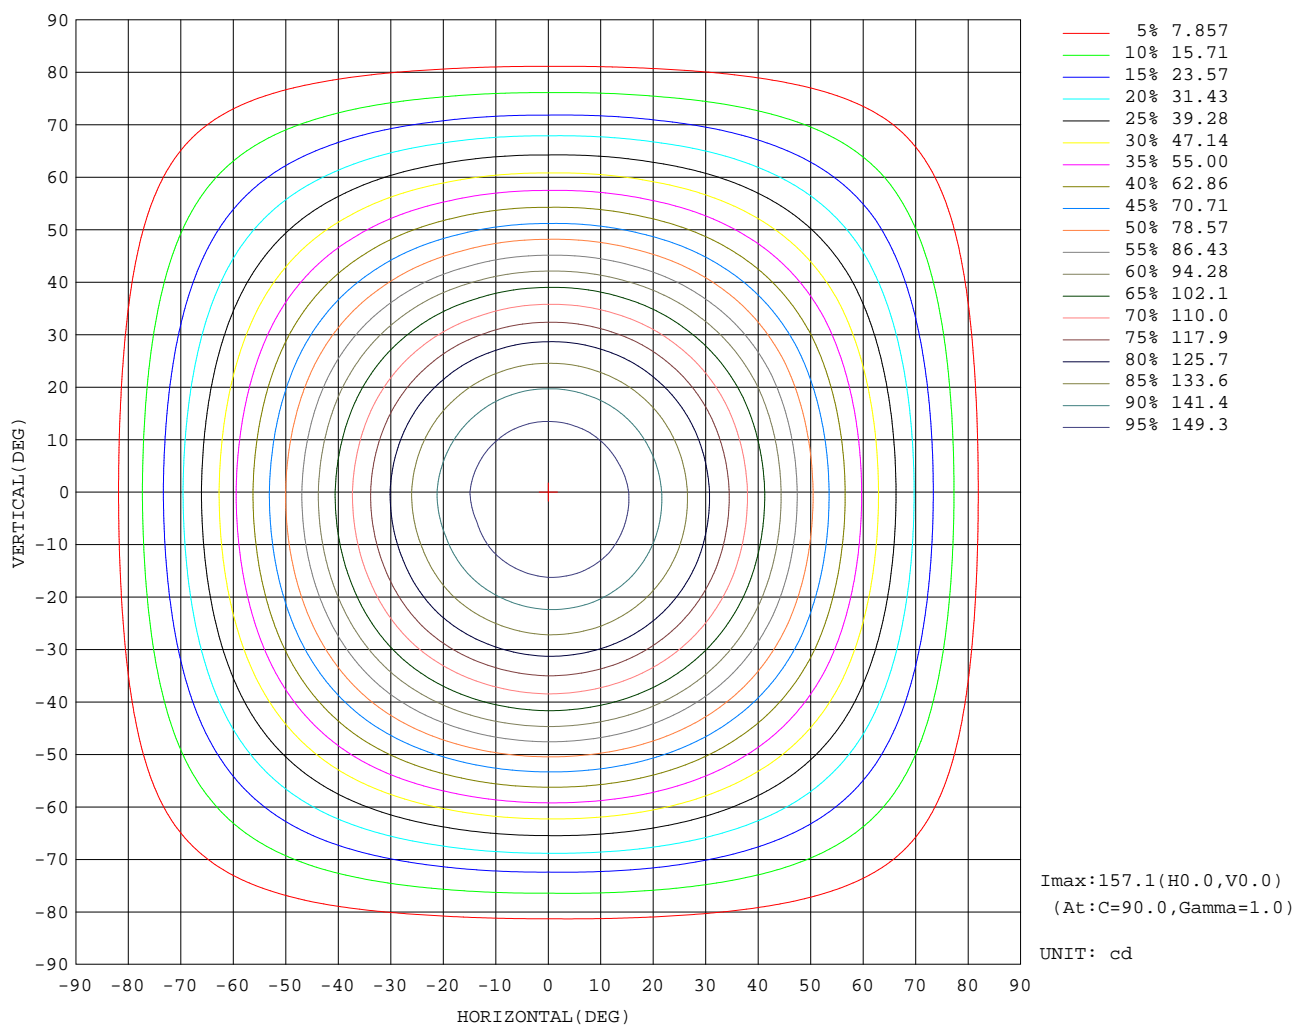


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Oliver  
Test Date:2022-11-22

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity:65.0%  
Test Distance:2.519m [K=1.0000]  
Remarks:




AAI Figure

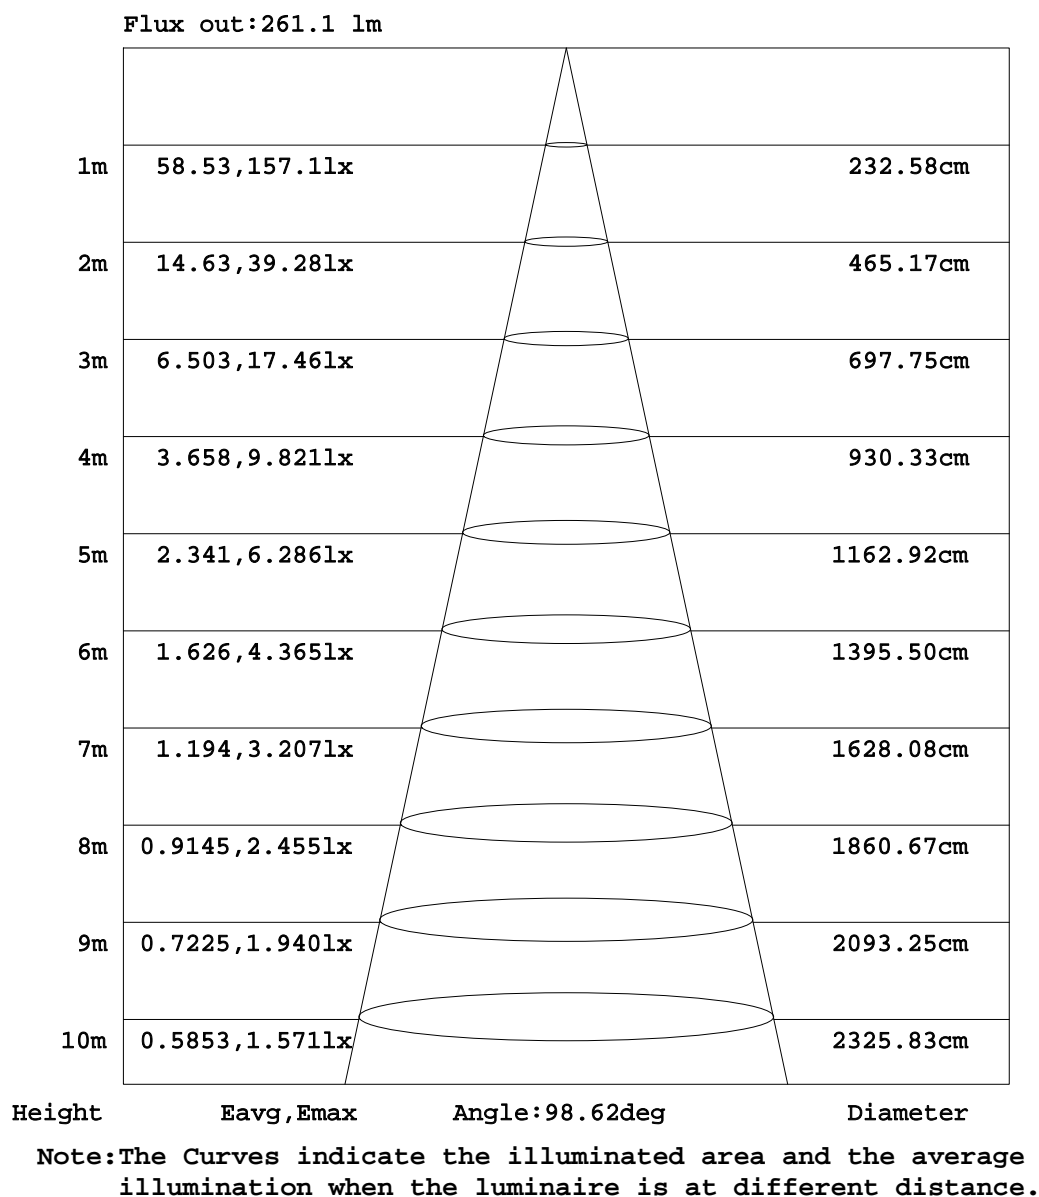

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2022-11-22

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.519m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

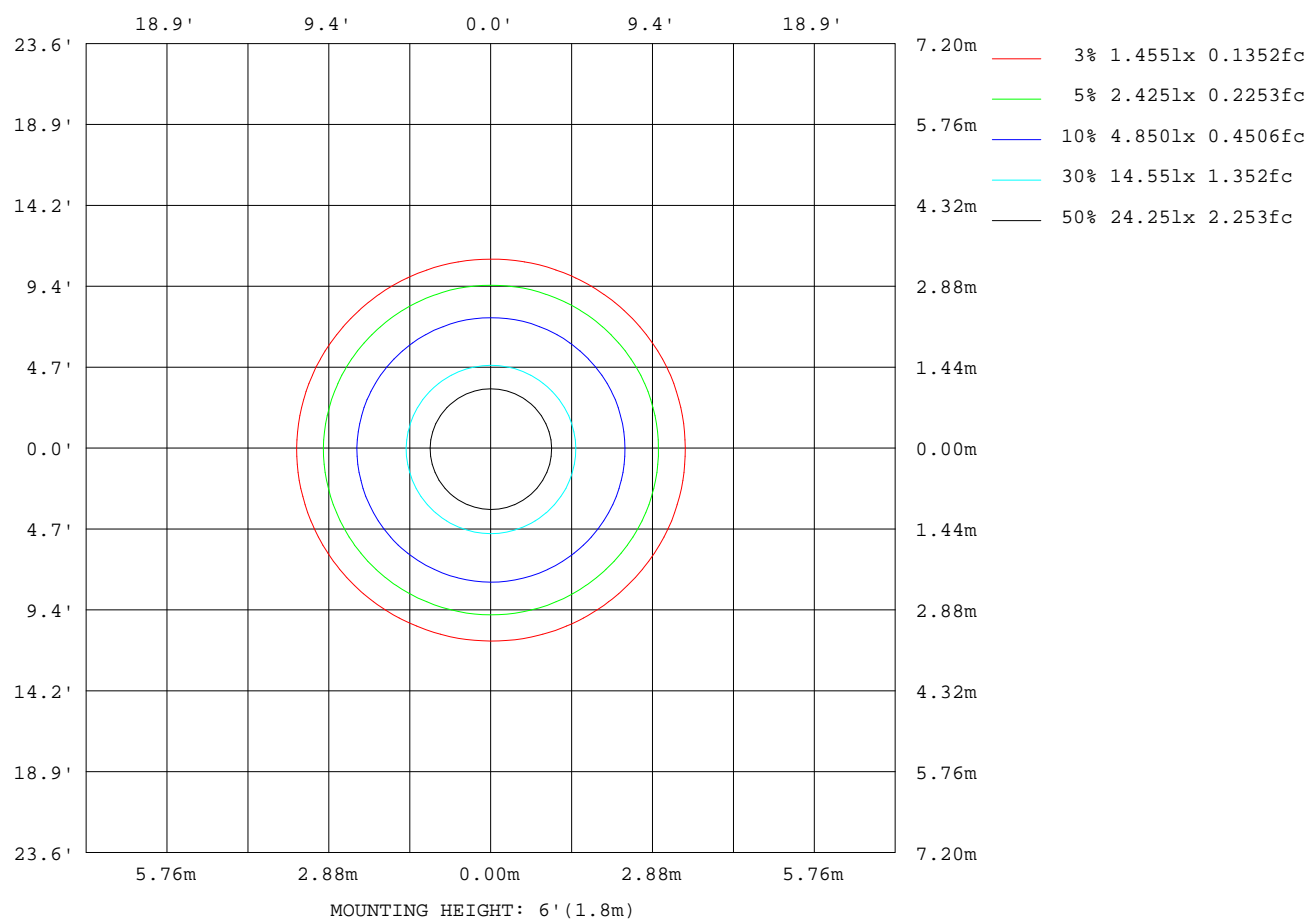

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2022-11-22

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.519m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:26.794V I:0.1505A P:4.0317W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:384.104x1 lm		
NAME: 线条灯150mA-6500K	TYPE: Surface-mounted Luminaire	HEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	3304
L_0~180(75)av	2595
L_0~180(85)av	1354
L_90~270(65)av	3079
L_90~270(75)av	2324
L_90~270(85)av	1145
L_45(65)av	3186
L_45(75)av	2467
L_45(85)av	1264

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Oliver  
Test Date:2022-11-22

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity:65.0%  
Test Distance:2.519m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

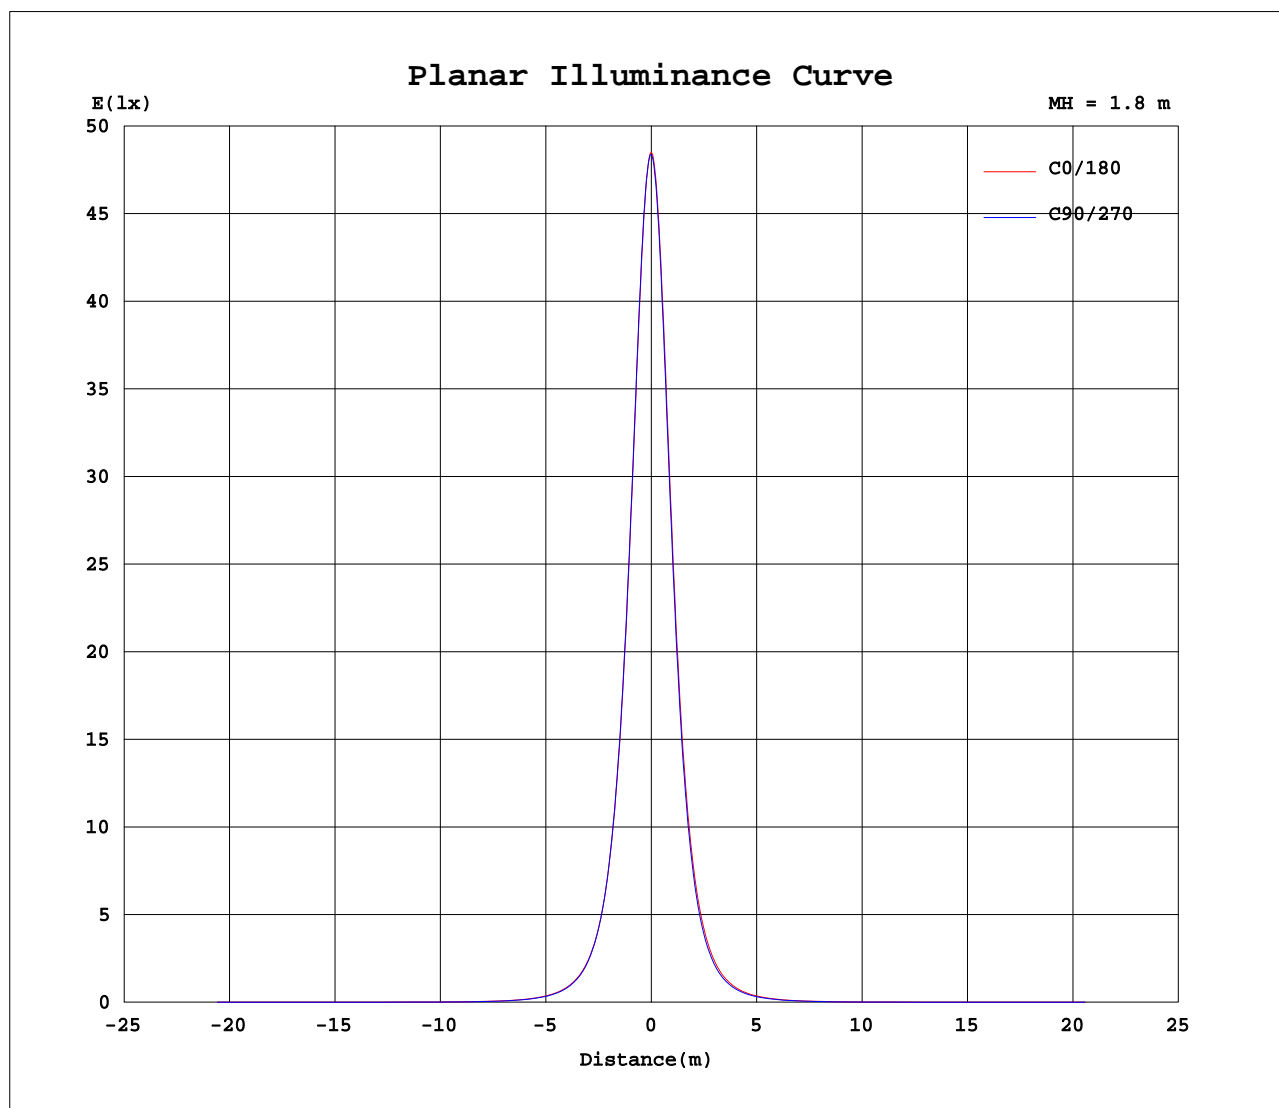

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2022-11-22

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.519m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	157	157	157	157	157	157	157	157	157	157	157	157	157	157	157	157			
5	156	156	156	156	156	156	156	156	156	156	156	156	155	156	156	156			
10	153	154	154	155	154	154	154	153	153	153	153	153	152	153	153	153			
15	149	150	151	151	151	150	150	149	149	148	148	148	148	148	148	149			
20	143	144	145	145	145	144	144	143	143	142	142	141	141	141	142	143			
25	136	137	137	138	137	137	136	136	135	134	133	133	133	133	134	135			
30	127	128	128	128	128	128	127	126	126	125	124	123	123	124	125	126			
35	116	117	118	118	118	117	117	116	115	114	113	112	112	112	114	115			
40	105	106	106	106	106	106	105	104	103	102	101	99.5	99.6	100	102	104			
45	92.4	93.3	93.3	93.4	93.5	93.1	92.8	91.8	91.1	89.7	87.9	86.7	86.8	87.6	89.3	91.6			
50	79.6	80.4	80.1	80.0	79.9	79.6	79.7	79.1	78.5	77.1	75.1	73.9	73.8	74.7	76.5	78.9			
55	66.7	67.4	66.8	66.6	66.3	66.0	66.4	66.3	65.9	64.4	62.4	61.3	61.0	61.9	63.8	66.0			
60	54.2	54.6	53.8	53.5	53.0	52.9	53.5	53.7	53.6	52.3	50.4	49.3	49.0	49.9	51.6	53.6			
65	42.1	42.4	41.5	41.0	40.5	40.5	41.1	41.6	41.7	40.5	38.9	37.9	37.6	38.4	40.0	41.8			
70	30.7	30.8	30.1	29.4	28.8	29.0	29.7	30.1	30.4	29.5	28.2	27.4	27.1	27.8	29.1	30.5			
75	20.2	20.2	19.7	19.1	18.4	18.7	19.3	19.5	20.1	19.4	18.5	17.9	17.7	18.2	19.2	20.2			
80	11.0	11.0	10.7	10.2	9.86	9.97	10.3	10.5	11.0	10.6	10.0	9.64	9.53	9.83	10.4	11.1			
85	3.61	3.61	3.53	3.31	3.13	3.12	3.29	3.29	3.47	3.29	3.07	2.90	2.86	3.03	3.33	3.67			
90	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00			
135	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.00	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02			
140	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03			
145	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04			
150	0.02	0.02	0.02	0.03	0.03	0.02	0.03	0.02	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04			
155	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05			
160	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05			
165	0.04	0.03	0.04	0.03	0.04	0.04	0.03	0.03	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05			
170	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05			
175	0.04	0.04	0.04	0.04	0.05	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04			
180	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2022-11-22

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.519m [K=1.0000]  
 Remarks: