


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.022V I:0.4504A P:10.820W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:1037.76x1 lm		
NAME: 5821-6500(恒流)	TYPE: Landscape Lighting	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 95.91 lm/W			
MODEL		Imax(cd)	714.1	S/MH(C0/180)	1.25
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	0.98
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	1037.8	η UP,DN(C0-180)	0.0,52.4
NOMINAL FLUX(lm)	1037.76	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,47.6
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	24	η down(%)	100.0	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

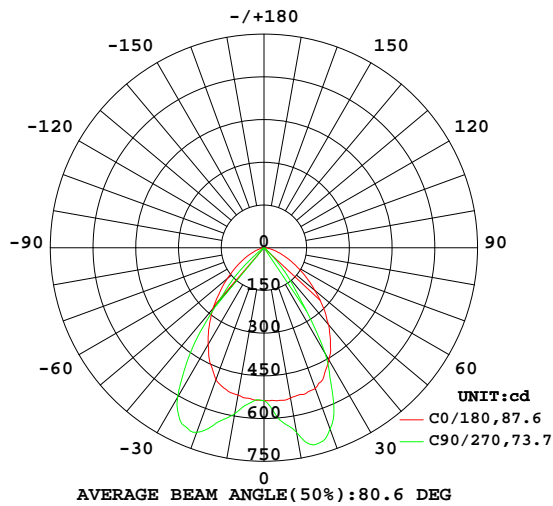

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

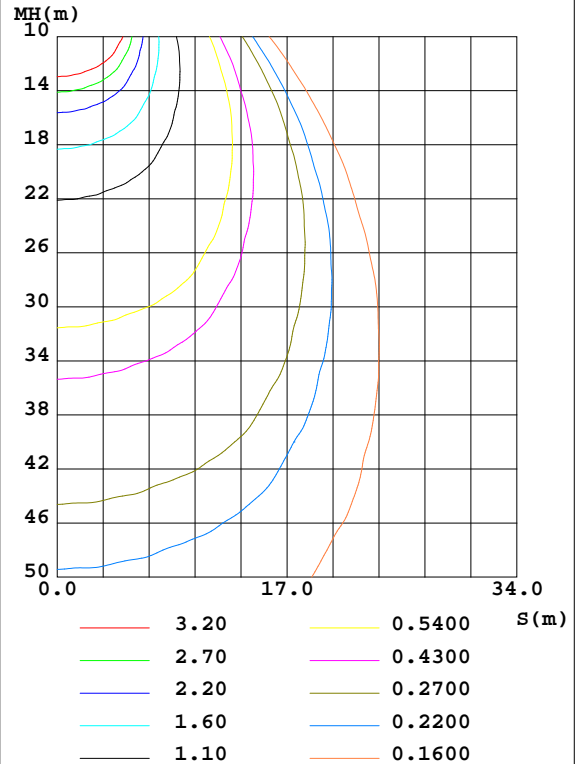

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.519m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum
10	525.0	556.9	592.1	562.8	536.0	633.0	658.0	612.0	0- 10	54.09	54.09	5.21
20	493.3	576.3	689.7	608.3	526.4	674.2	678.3	629.2	10- 20	172.1	226.2	21.8
30	392.4	540.8	607.3	610.2	455.9	570.1	432.1	482.1	20- 30	262.4	488.6	47.1
40	278.9	372.4	255.7	463.6	352.6	339.2	129.1	247.0	30- 40	253.9	742.5	71.6
50	167.6	157.2	45.14	228.4	232.6	124.3	16.39	82.94	40- 50	165.4	907.9	87.5
60	84.91	43.13	5.580	73.93	134.2	40.77	6.449	24.71	50- 60	81.43	989.4	95.3
70	32.66	2.493	0.0016	9.965	63.48	8.511	2.807	5.237	60- 70	35.21	1025	98.7
80	4.168	0	0	0.0914	20.67	2.710	1.115	1.331	70- 80	11.24	1036	99.8
90	0	0	0	0	0.2744	0.0103	0.0025	0	80- 90	1.558	1037	100
100	0	0	0	0	0	0	0	0	90-100	0.0041	1037	100
110	0	0	0	0	0	0	0	0	100-110	0	1037	100
120	0.0261	0	0	0	0.0481	0.0251	0.0294	0.0669	110-120	0.0050	1037	100
130	0.0671	0.0172	0.0126	0.0240	0.0766	0.0931	0.1070	0.1092	120-130	0.0320	1037	100
140	0.1064	0.0609	0.0748	0.0736	0.1440	0.1645	0.1944	0.1722	130-140	0.0739	1037	100
150	0.1435	0.1179	0.1403	0.1328	0.1960	0.2170	0.2532	0.2256	140-150	0.0954	1038	100
160	0.1722	0.1679	0.1902	0.1882	0.2271	0.2461	0.2895	0.2876	150-160	0.0930	1038	100
170	0.1950	0.2033	0.2219	0.2292	0.2178	0.2309	0.2747	0.2796	160-170	0.0647	1038	100
180	0.2145	0.2364	0.2722	0.2648	0.2183	0.2258	0.2612	0.2690	170-180	0.0229	1038	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 837.3 lm

%lum = 80.7%

%lamp = 80.7%

Conical surface Flux(120deg): 989.36 lm


%lum = 95.3%

%lamp = 95.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.519m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

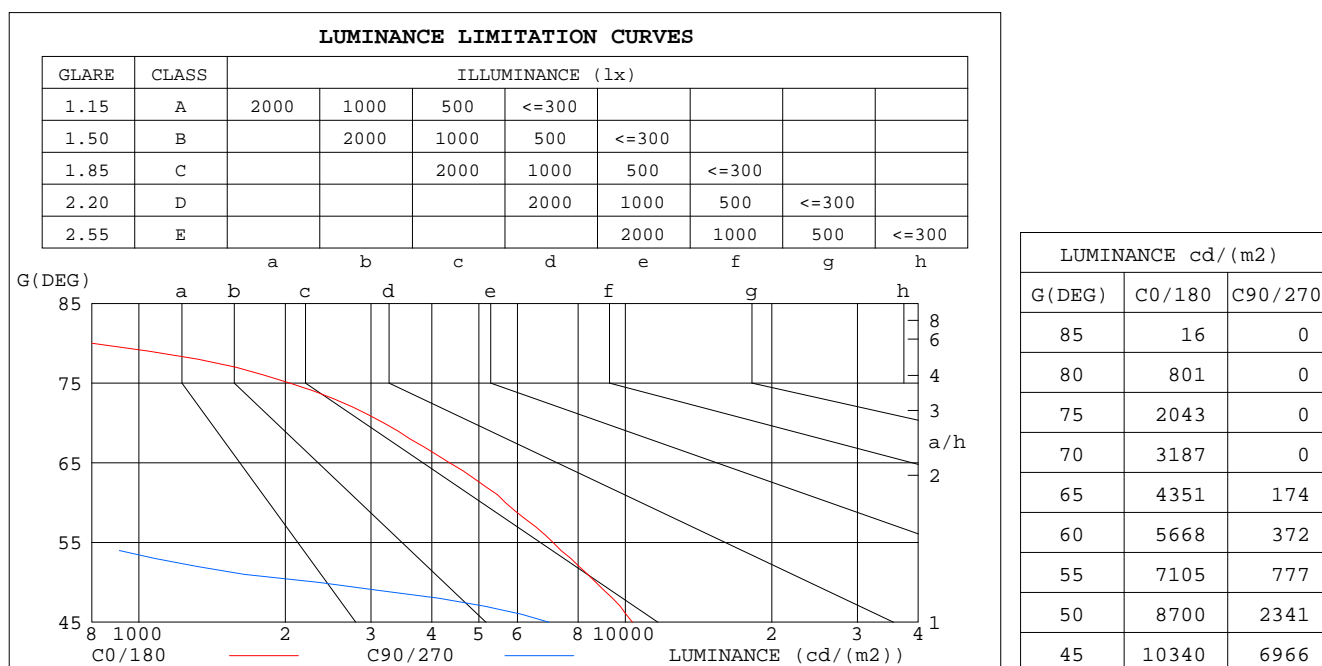


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.519m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.05	1.03	1.06	1.04	1.01	1.02	.00	.98	.98	.97	.95	.95	.94	.92	.90
2.0	.99	.93	.89	.97	.92	.88	.93	.90	.86	.90	.87	.84	.87	.85	.83	.81
3.0	.90	.83	.78	.88	.82	.78	.85	.80	.76	.83	.79	.75	.80	.77	.74	.72
4.0	.82	.75	.69	.80	.74	.69	.78	.73	.68	.76	.71	.67	.74	.70	.66	.65
5.0	.75	.67	.62	.74	.67	.62	.72	.66	.61	.70	.65	.61	.68	.64	.60	.58
6.0	.69	.61	.56	.68	.61	.56	.66	.60	.55	.65	.59	.55	.63	.58	.54	.53
7.0	.63	.56	.51	.62	.56	.51	.61	.55	.50	.60	.54	.50	.59	.53	.50	.48
8.0	.58	.51	.46	.58	.51	.46	.57	.50	.46	.55	.50	.46	.54	.49	.45	.44
9.0	.54	.47	.42	.54	.47	.42	.53	.46	.42	.52	.46	.42	.51	.46	.42	.40
10.0	.51	.44	.39	.50	.43	.39	.49	.43	.39	.48	.43	.39	.47	.42	.39	.37

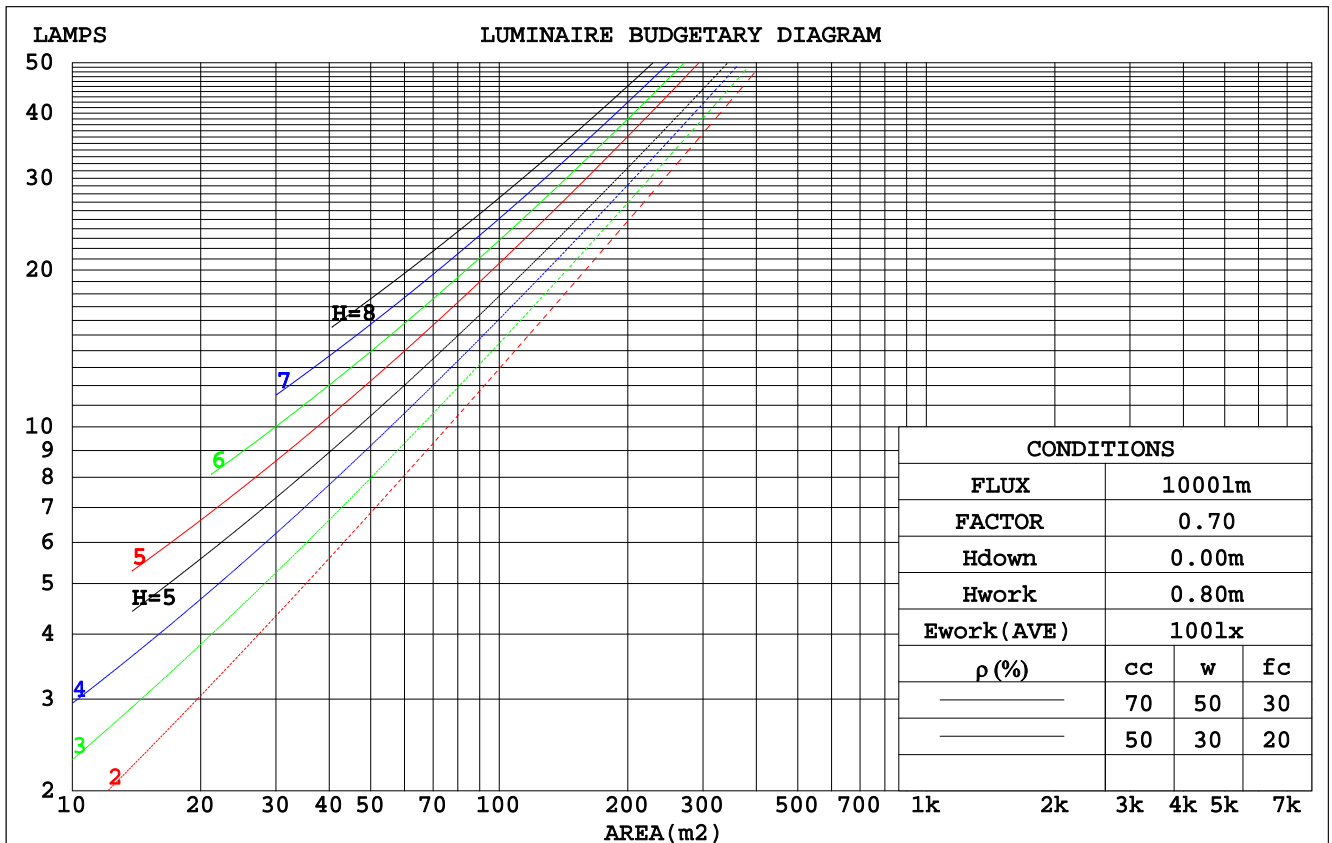

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.519m [K=1.0000]
 Remarks:

WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.220	.125	.040	.213	.122	.039	.200	.115	.037	.189	.109	.035	.178	.103	.033		
2.0	.214	.117	.036	.208	.115	.035	.197	.110	.034	.187	.105	.033	.178	.101	.032		
3.0	.205	.109	.033	.200	.107	.032	.190	.103	.031	.181	.099	.030	.173	.096	.030		
4.0	.194	.101	.030	.190	.099	.029	.181	.096	.029	.174	.093	.028	.166	.090	.028		
5.0	.184	.094	.027	.180	.093	.027	.173	.090	.026	.166	.088	.026	.159	.085	.026		
6.0	.175	.087	.025	.171	.086	.025	.164	.084	.025	.158	.082	.024	.153	.080	.024		
7.0	.165	.082	.023	.162	.081	.023	.156	.079	.023	.151	.077	.023	.146	.076	.022		
8.0	.157	.077	.022	.154	.076	.021	.149	.074	.021	.144	.073	.021	.139	.072	.021		
9.0	.149	.072	.020	.147	.072	.020	.142	.070	.020	.138	.069	.020	.133	.068	.020		
10.0	.142	.068	.019	.140	.068	.019	.136	.066	.019	.132	.065	.019	.128	.064	.018		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.149	.135	.122	.102	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.162	.133	.108	.139	.114	.093	.095	.079	.065	.055	.046	.038	.018	.015	.012	
3.0	.152	.114	.084	.130	.098	.073	.090	.068	.051	.052	.040	.030	.017	.013	.010	
4.0	.144	.100	.067	.123	.086	.058	.085	.060	.041	.049	.035	.024	.016	.011	.008	
5.0	.136	.089	.054	.117	.077	.047	.080	.054	.033	.047	.032	.020	.015	.010	.007	
6.0	.129	.080	.045	.111	.070	.039	.077	.049	.028	.044	.029	.017	.014	.009	.005	
7.0	.123	.073	.038	.106	.063	.033	.073	.044	.023	.043	.026	.014	.014	.009	.005	
8.0	.117	.067	.033	.101	.058	.028	.070	.041	.020	.041	.024	.012	.013	.008	.004	
9.0	.112	.062	.028	.097	.054	.025	.067	.038	.018	.039	.022	.010	.013	.007	.003	
10.0	.107	.058	.025	.093	.050	.022	.064	.035	.016	.037	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.519m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.4	20.6	19.7	20.8	21.0	16.3	17.5	16.5	17.7	17.8
3H	19.7	20.8	20.0	21.0	21.2	16.1	17.2	16.3	17.4	17.6
4H	19.7	20.7	20.0	21.0	21.2	16.0	17.0	16.3	17.2	17.5
6H	19.6	20.6	19.9	20.8	21.1	15.9	16.9	16.2	17.1	17.4
8H	19.6	20.5	19.9	20.8	21.0	15.8	16.8	16.2	17.0	17.3
12H	19.5	20.4	19.9	20.7	21.0	15.8	16.7	16.1	17.0	17.2
4H 2H	19.2	20.3	19.5	20.5	20.7	16.3	17.4	16.6	17.6	17.9
3H	19.5	20.4	19.9	20.7	21.0	16.1	17.0	16.5	17.3	17.6
4H	19.6	20.4	19.9	20.7	21.0	16.0	16.9	16.4	17.2	17.5
6H	19.5	20.2	19.9	20.6	20.9	16.0	16.7	16.3	17.0	17.4
8H	19.5	20.1	19.9	20.5	20.8	15.9	16.6	16.3	16.9	17.3
12H	19.4	20.0	19.8	20.4	20.8	15.9	16.5	16.3	16.8	17.2
8H 4H	19.4	20.1	19.8	20.4	20.8	15.9	16.6	16.3	17.0	17.3
6H	19.4	19.9	19.8	20.3	20.7	15.9	16.4	16.3	16.8	17.2
8H	19.3	19.8	19.8	20.2	20.7	15.8	16.3	16.3	16.7	17.1
12H	19.3	19.7	19.7	20.1	20.6	15.8	16.2	16.2	16.6	17.1
12H 4H	19.4	20.0	19.8	20.4	20.7	15.9	16.5	16.3	16.9	17.3
6H	19.3	19.8	19.8	20.2	20.7	15.8	16.3	16.3	16.7	17.1
8H	19.3	19.7	19.7	20.1	20.6	15.8	16.2	16.2	16.6	17.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.5 / - 1.9					+ 2.6 / -12.5				
1.5H	+ 0.5 / - 1.3					+ 3.1 / - 7.5				
2.0H	+ 2.2 / - 2.9					+ 4.8 / -11.5				

CIE Pub.117, 1038 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.1$)
Area: 0.03 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.519m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	73	65	59	73	64	59	72	64	59	54
0.80	83	74	69	82	74	69	81	73	69	63
1.00	90	82	77	89	81	77	87	82	76	71
1.25	95	88	83	94	88	83	92	86	82	77
1.50	99	93	88	98	92	87	95	90	86	81
2.00	104	98	94	102	97	93	99	95	92	85
2.50	106	101	97	105	100	96	101	97	94	88
3.00	109	104	100	107	102	99	103	100	97	90
4.00	111	107	104	109	106	103	105	102	100	92
5.00	113	109	107	110	108	105	106	104	102	94
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.519m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

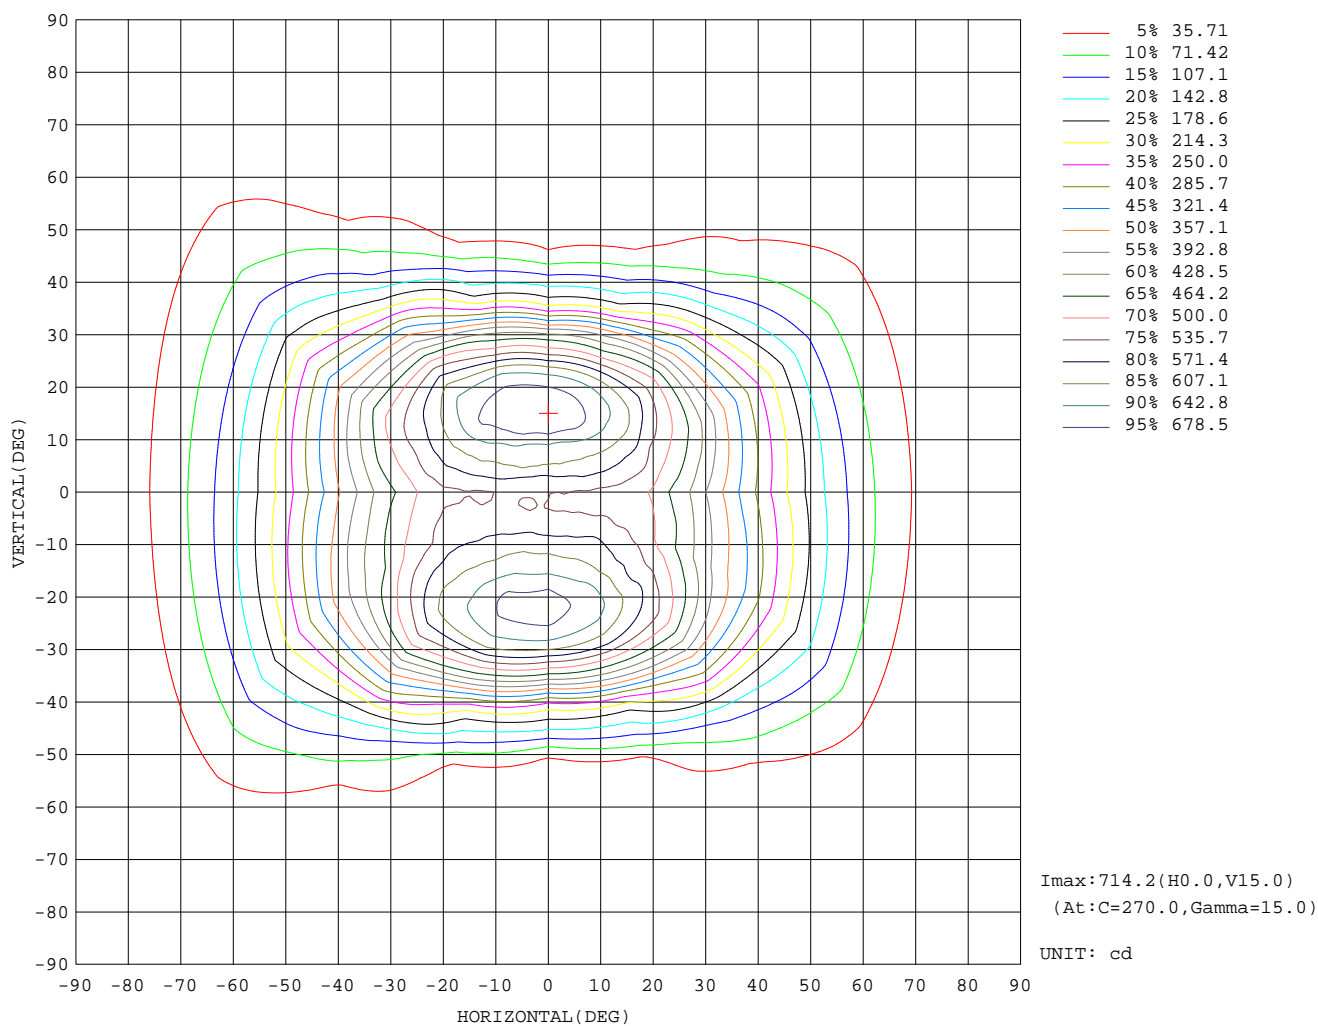

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.519m [K=1.0000]
Remarks:


AAI Figure

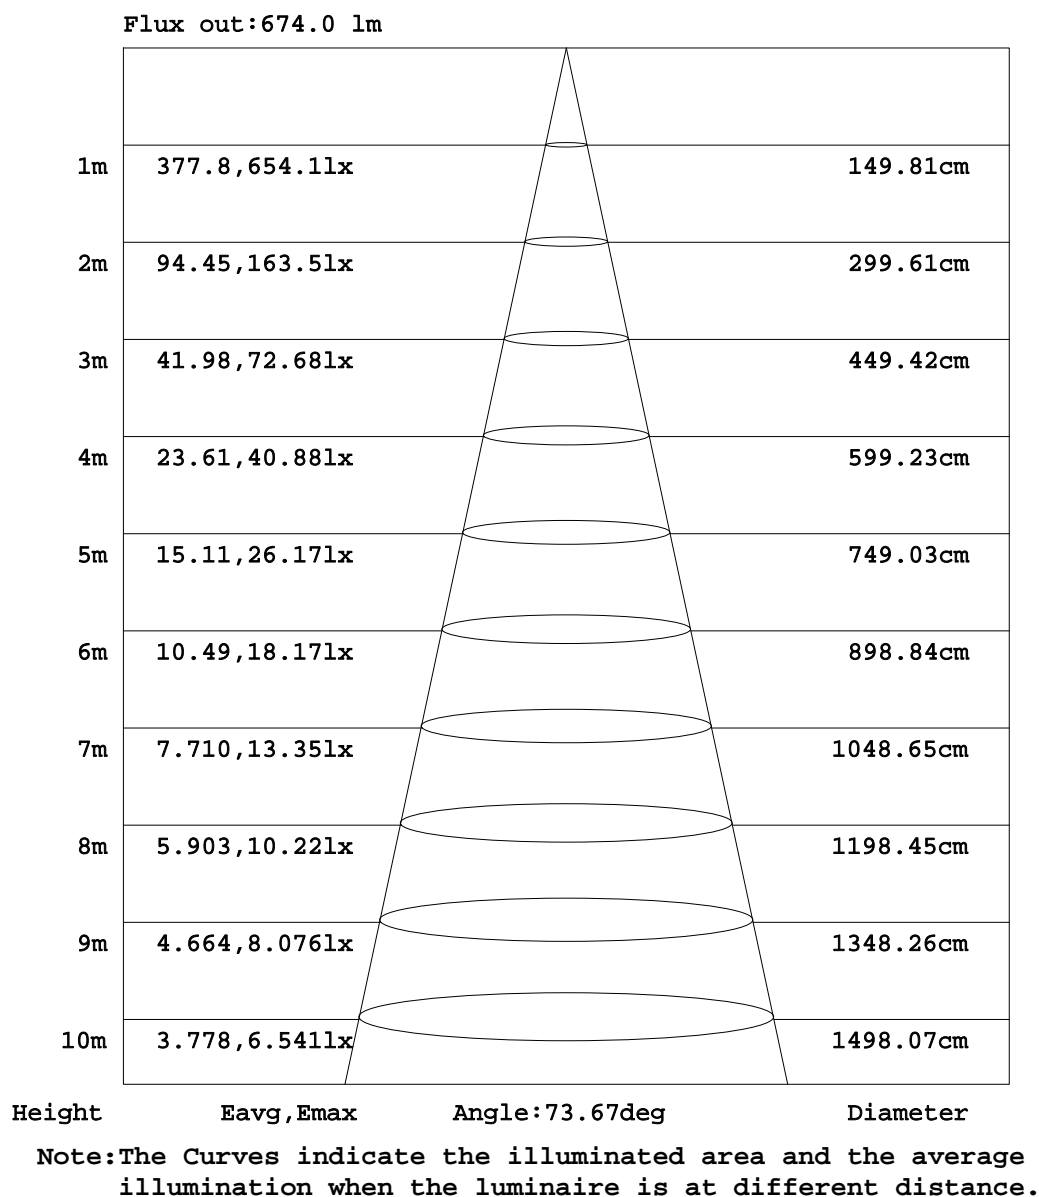

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.519m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

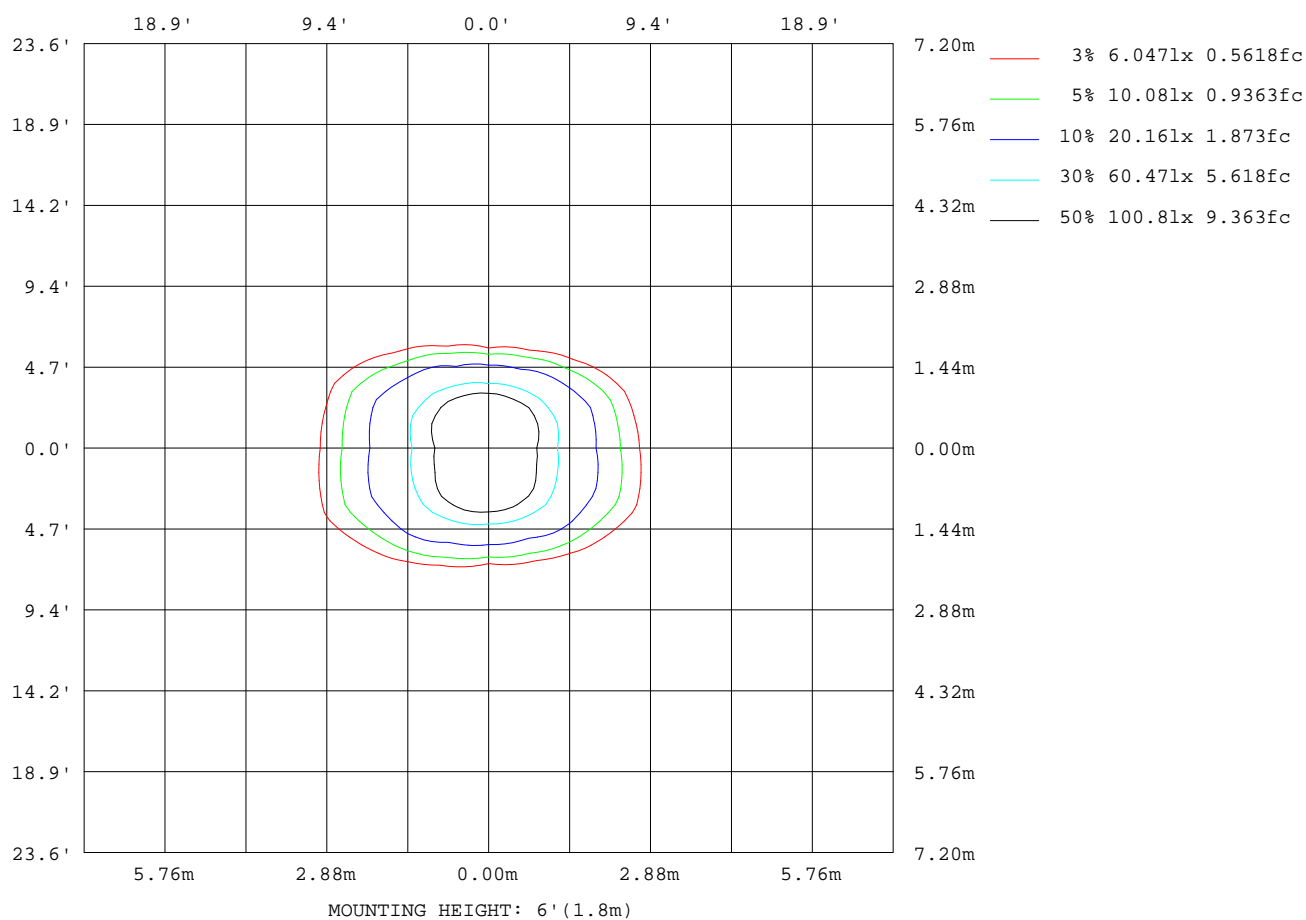

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2022-11-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.519m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.022V I:0.4504A P:10.820W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:1037.76x1 lm		
NAME: 5821-6500(恒流)	TYPE: Landscape Lighting	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	6005
L_0~180(75)av	3570
L_0~180(85)av	1256
L_90~270(65)av	255
L_90~270(75)av	117
L_90~270(85)av	49
L_45(65)av	1421
L_45(75)av	306
L_45(85)av	101

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2022-11-08

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.519m [K=1.0000]
Remarks:

Planar Illuminance Curve

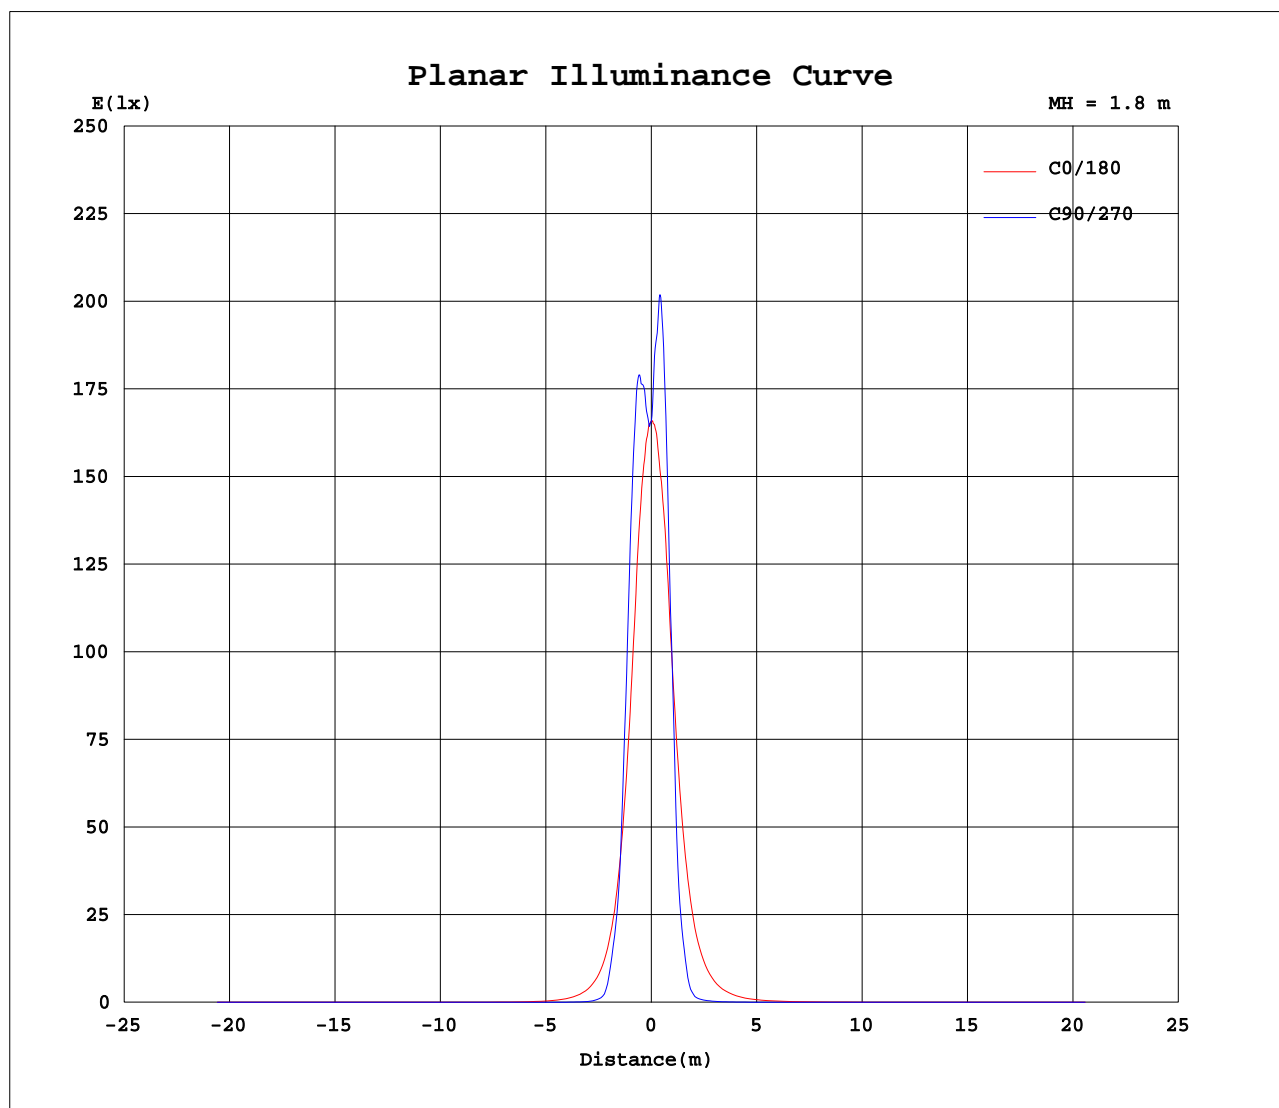

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.519m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	537	537	537	537	537	537	537	537	537	537	537	537	537	537	537	537			
5	533	527	535	544	546	542	536	532	539	555	585	601	604	599	580	554			
10	525	530	557	580	592	591	563	537	536	590	633	644	658	639	612	574			
15	515	529	576	616	635	628	592	547	533	602	661	713	714	693	634	572			
20	493	515	576	656	690	676	608	551	526	599	674	696	678	662	629	546			
25	448	477	576	651	682	681	622	530	498	570	642	623	572	568	569	504			
30	392	430	541	590	607	636	610	500	456	536	570	480	432	433	482	454			
35	335	382	472	461	452	516	551	454	407	483	453	323	227	269	355	383			
40	279	335	372	294	256	350	464	410	353	411	339	168	129	142	247	312			
45	219	274	267	157	148	187	343	358	293	338	216	96.3	47.1	75.1	149	238			
50	168	210	157	80.4	45.1	105	228	289	233	263	124	34.4	16.4	25.8	82.9	172			
55	122	152	87.7	17.9	13.4	25.7	128	222	181	189	73.2	13.4	9.80	10.9	48.5	113			
60	84.9	103	43.1	6.00	5.58	8.94	73.9	162	134	130	40.8	8.42	6.45	7.11	24.7	73.8			
65	55.1	60.6	12.9	2.49	2.21	3.84	30.4	109	97.2	84.7	18.3	5.67	4.25	4.73	10.5	46.6			
70	32.7	28.9	2.49	0.12	0.00	1.06	9.97	65.4	63.5	56.0	8.51	3.70	2.81	3.06	5.24	27.9			
75	15.8	9.80	0.14	0.00	0.00	0.00	1.83	33.6	39.6	34.5	4.74	2.38	1.82	1.86	2.79	14.0			
80	4.17	0.63	0.00	0.00	0.00	0.00	0.09	11.3	20.7	18.2	2.71	1.46	1.11	1.07	1.33	4.63			
85	0.04	0.00	0.00	0.00	0.00	0.00	0.00	1.81	6.53	6.48	0.99	0.47	0.26	0.13	0.06	0.10			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.54	0.01	0.01	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01			
120	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.04	0.03	0.04	0.03	0.06	0.07	0.06			
125	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.05	0.05	0.05	0.05	0.06	0.07	0.07			
130	0.07	0.04	0.02	0.01	0.01	0.02	0.02	0.03	0.08	0.09	0.09	0.10	0.11	0.11	0.11	0.11			
135	0.10	0.06	0.04	0.04	0.05	0.05	0.05	0.06	0.11	0.12	0.13	0.15	0.16	0.15	0.15	0.15			
140	0.11	0.08	0.06	0.07	0.07	0.07	0.07	0.08	0.14	0.16	0.16	0.19	0.19	0.19	0.17	0.18			
145	0.13	0.10	0.09	0.10	0.11	0.10	0.10	0.11	0.17	0.19	0.19	0.22	0.23	0.22	0.20	0.20			
150	0.14	0.12	0.12	0.14	0.14	0.13	0.13	0.14	0.20	0.21	0.22	0.24	0.25	0.24	0.23	0.23			
155	0.16	0.14	0.14	0.17	0.17	0.16	0.16	0.16	0.21	0.23	0.24	0.25	0.28	0.27	0.26	0.25			
160	0.17	0.16	0.17	0.19	0.19	0.19	0.19	0.18	0.23	0.23	0.25	0.26	0.29	0.29	0.29	0.27			
165	0.18	0.17	0.19	0.21	0.21	0.20	0.21	0.20	0.23	0.23	0.24	0.26	0.28	0.29	0.29	0.28			
170	0.20	0.19	0.20	0.23	0.22	0.22	0.23	0.22	0.22	0.22	0.23	0.25	0.27	0.27	0.28	0.27			
175	0.21	0.22	0.23	0.26	0.25	0.26	0.26	0.25	0.22	0.22	0.23	0.25	0.28	0.28	0.28	0.27			
180	0.21	0.22	0.24	0.26	0.27	0.27	0.26	0.23	0.22	0.22	0.23	0.24	0.26	0.27	0.27	0.26			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2022-11-08

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.519m [K=1.0000]
 Remarks: