


## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:25.006V I:0.3058A P:7.6472W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:98.9482x1 lm


NAME: 6841-B	TYPE: Landscape Lighting	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 12.94 lm/W			
MODEL		Imax(cd)	43.17	S/MH(C0/180)	1.24
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	98.948	$\eta$ UP,DN(C0-180)	0.0,49.8
NOMINAL FLUX(lm)	98.9482	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,50.2
LAMPS INSIDE	1	$\eta$ up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	$\eta$ down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

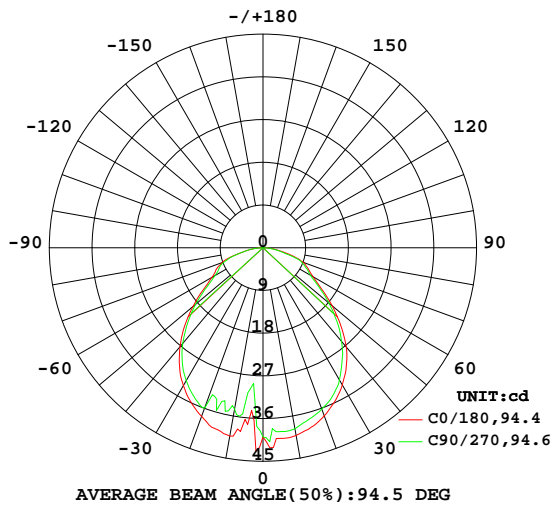

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

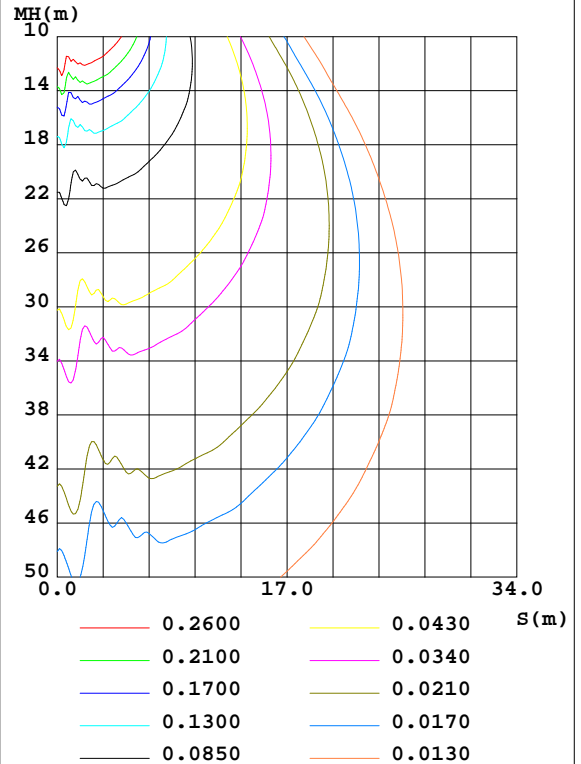

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Oliver  
Test Date:2022-10-28

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity:65.0%  
Test Distance:2.519m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum
10	40.25	38.96	34.55	40.48	40.17	40.40	38.72	40.24	0- 10	3.683	3.683	3.72
20	37.81	37.27	35.99	38.12	37.72	38.06	36.18	37.95	10- 20	10.79	14.48	14.6
30	33.52	33.04	32.36	33.96	33.42	33.98	32.18	33.69	20- 30	16.35	30.82	31.1
40	27.18	26.85	26.30	27.32	27.28	27.52	25.74	27.15	30- 40	18.97	49.79	50.3
50	19.27	18.77	18.49	17.46	19.03	19.26	18.14	19.07	40- 50	17.71	67.50	68.2
60	12.42	12.02	11.63	10.28	12.15	12.79	11.58	12.23	50- 60	13.42	80.92	81.8
70	9.241	8.567	8.620	8.250	9.057	9.194	8.610	8.677	60- 70	10.41	91.33	92.3
80	3.412	2.916	3.420	2.840	3.348	3.095	3.004	2.995	70- 80	6.131	97.46	98.5
90	0.0022	0	0.0241	0.0028	0.0025	0.0304	0	0	80- 90	1.484	98.95	100
100	0	0	0	0	0	0	0	0	90-100	0.0006	98.95	100
110	0.0000	0	0	0	0	0	0	0	100-110	0.0000	98.95	100
120	0	0	0	0	0	0	0	0	110-120	0.0000	98.95	100
130	0	0	0	0	0	0	0	0	120-130	0	98.95	100
140	0	0	0	0	0	0	0	0	130-140	0	98.95	100
150	0	0	0	0	0	0	0	0	140-150	0	98.95	100
160	0	0	0	0	0	0	0	0	150-160	0	98.95	100
170	0	0	0	0	0	0	0	0	160-170	0	98.95	100
180	0	0	0	0	0	0	0	0	170-180	0	98.95	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 59.049 lm

%lum = 59.7%

%lamp = 59.7%

Conical surface Flux(120deg): 80.923 lm


%lum = 81.8%

%lamp = 81.8%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Oliver  
 Test Date:2022-10-28

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity:65.0%  
 Test Distance:2.519m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

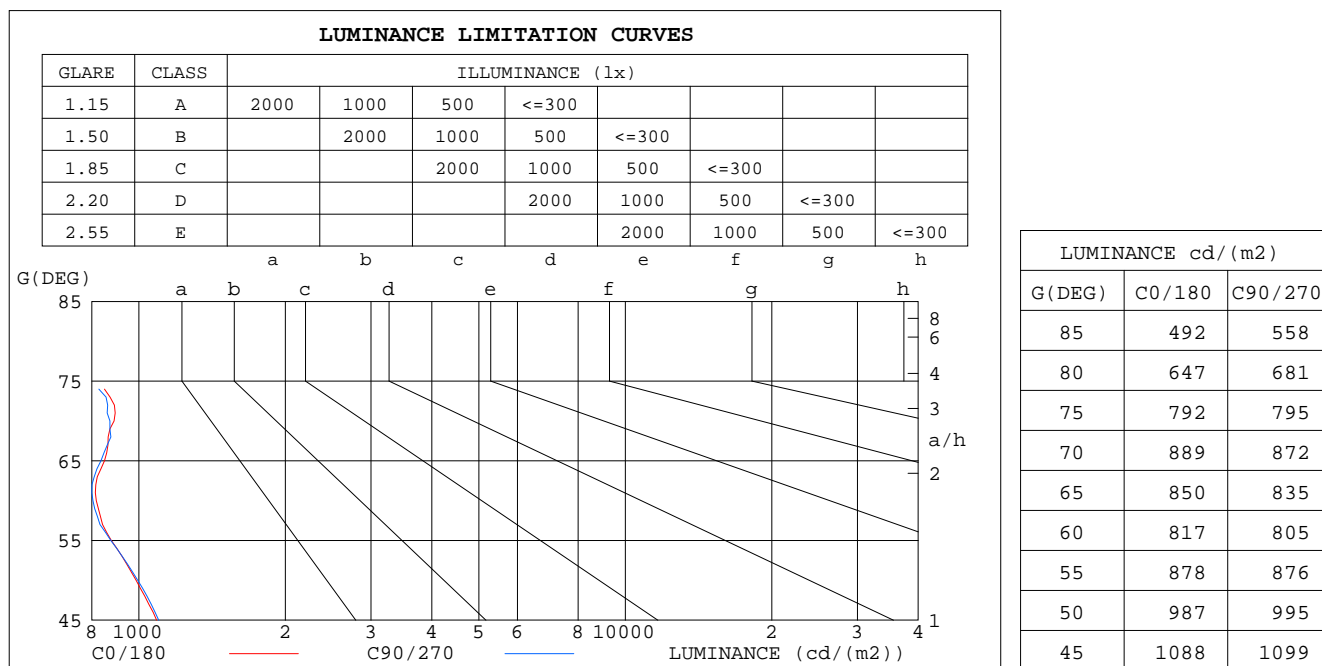


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2022-10-28

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.519m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.05	1.01	.97	1.03	.99	.95	.98	.95	.92	.94	.92	.90	.91	.89	.87	.85
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.77	.83	.79	.75	.80	.77	.74	.72
3.0	.81	.74	.67	.80	.73	.67	.77	.71	.66	.74	.69	.64	.72	.67	.63	.61
4.0	.73	.64	.58	.71	.63	.57	.69	.62	.56	.66	.61	.56	.64	.59	.55	.53
5.0	.65	.57	.50	.64	.56	.50	.62	.55	.49	.60	.54	.49	.58	.53	.48	.46
6.0	.59	.50	.44	.58	.50	.44	.56	.49	.44	.55	.48	.43	.53	.47	.43	.41
7.0	.54	.45	.39	.53	.45	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.36
8.0	.49	.41	.35	.48	.41	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.33
9.0	.45	.37	.32	.45	.37	.32	.43	.36	.32	.42	.36	.31	.41	.36	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.38	.33	.28	.27

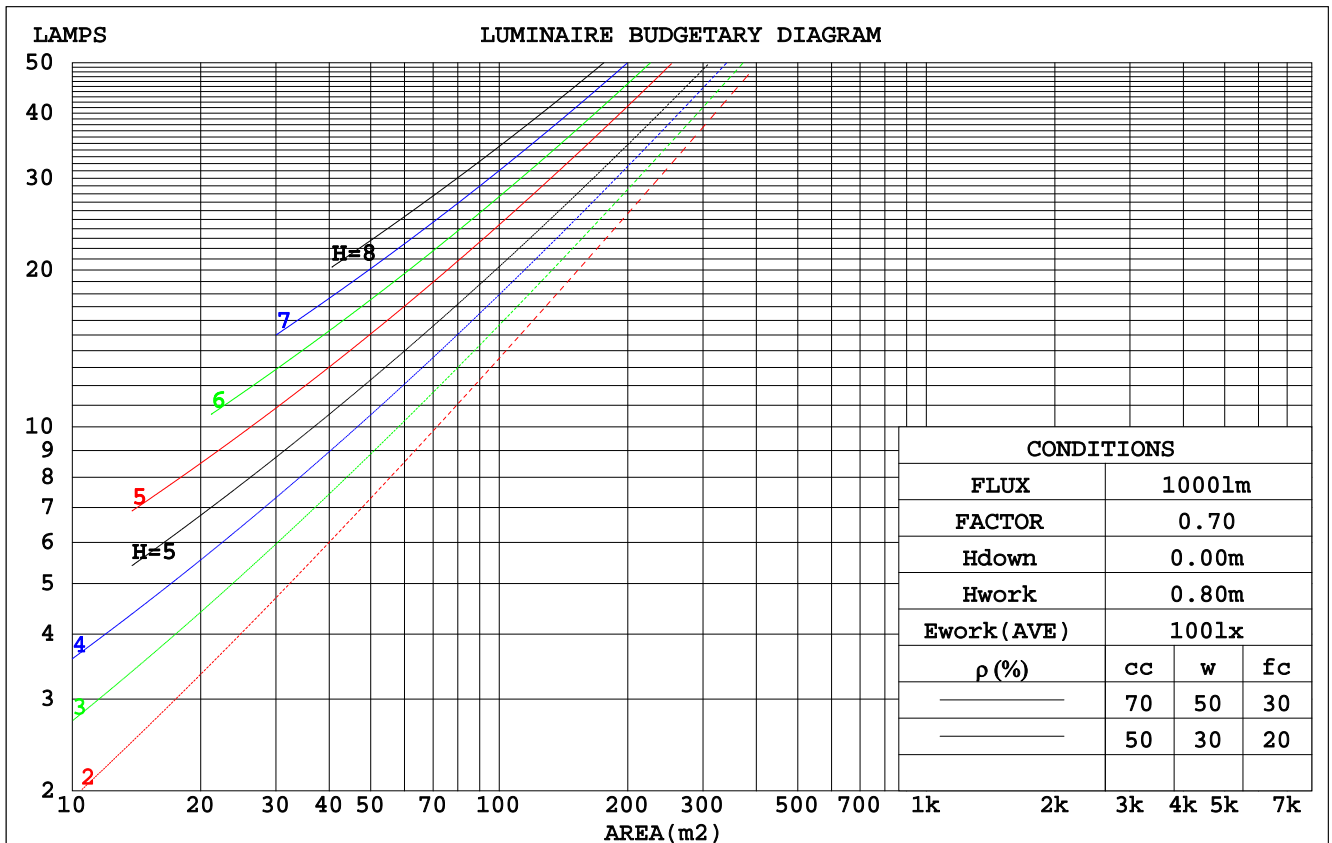

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2022-10-28

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.519m [K=1.0000]  
 Remarks:

## WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.292	.166	.053	.285	.163	.052	.272	.156	.050	.260	.150	.048	.249	.144	.047	
2.0	.277	.152	.046	.270	.149	.046	.259	.144	.045	.248	.139	.044	.238	.135	.042	
3.0	.257	.137	.041	.252	.135	.041	.241	.131	.040	.232	.127	.039	.223	.124	.038	
4.0	.238	.124	.036	.233	.122	.036	.224	.119	.036	.216	.116	.035	.208	.113	.034	
5.0	.221	.113	.033	.217	.111	.032	.209	.109	.032	.201	.106	.032	.194	.104	.031	
6.0	.206	.103	.030	.202	.102	.029	.195	.100	.029	.188	.098	.029	.182	.096	.028	
7.0	.192	.095	.027	.189	.094	.027	.182	.092	.027	.176	.090	.026	.171	.089	.026	
8.0	.180	.088	.025	.177	.087	.025	.171	.085	.024	.166	.084	.024	.161	.083	.024	
9.0	.169	.082	.023	.166	.081	.023	.161	.080	.023	.156	.078	.022	.152	.077	.022	
10.0	.159	.076	.021	.157	.076	.021	.152	.075	.021	.148	.073	.021	.144	.072	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.179	.156	.136	.153	.134	.117	.105	.092	.081	.060	.053	.047	.019	.017	.015	
2.0	.170	.132	.100	.146	.114	.086	.100	.079	.060	.058	.046	.035	.018	.015	.012	
3.0	.162	.114	.076	.139	.099	.066	.095	.068	.046	.055	.040	.027	.018	.013	.009	
4.0	.154	.101	.060	.132	.087	.052	.091	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.147	.090	.049	.126	.078	.042	.087	.055	.030	.050	.032	.018	.016	.010	.006	
6.0	.140	.082	.040	.120	.071	.035	.083	.050	.025	.048	.029	.015	.015	.010	.005	
7.0	.133	.075	.034	.114	.065	.030	.079	.045	.021	.046	.027	.013	.015	.009	.004	
8.0	.127	.069	.029	.109	.060	.026	.075	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.121	.064	.026	.104	.056	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	
10.0	.115	.060	.023	.099	.052	.020	.069	.037	.014	.040	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2022-10-28

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.519m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.1	13.6	12.4	13.8	14.0	12.1	13.6	12.4	13.8	14.0
3H	13.8	15.1	14.1	15.4	15.6	13.8	15.1	14.1	15.4	15.6
4H	14.4	15.7	14.7	15.9	16.2	14.5	15.8	14.8	16.0	16.3
6H	14.8	16.0	15.1	16.2	16.5	14.9	16.1	15.2	16.4	16.7
8H	14.9	16.0	15.2	16.3	16.6	15.0	16.2	15.4	16.5	16.8
12H	14.9	16.1	15.3	16.3	16.6	15.1	16.2	15.5	16.5	16.8
4H 2H	12.7	14.0	13.0	14.2	14.5	12.7	14.0	13.0	14.2	14.5
3H	14.6	15.7	14.9	16.0	16.3	14.6	15.7	14.9	16.0	16.3
4H	15.3	16.3	15.6	16.6	16.9	15.4	16.4	15.8	16.8	17.1
6H	15.7	16.6	16.1	17.0	17.3	16.0	16.9	16.4	17.2	17.6
8H	15.9	16.7	16.3	17.1	17.4	16.2	17.0	16.6	17.4	17.7
12H	15.9	16.7	16.4	17.1	17.5	16.3	17.1	16.7	17.4	17.8
8H 4H	15.5	16.3	15.9	16.7	17.1	15.6	16.5	16.0	16.8	17.2
6H	16.0	16.7	16.5	17.1	17.5	16.3	17.0	16.7	17.4	17.8
8H	16.2	16.9	16.7	17.3	17.7	16.6	17.2	17.0	17.6	18.1
12H	16.4	16.9	16.9	17.4	17.8	16.8	17.3	17.3	17.8	18.2
12H 4H	15.5	16.2	15.9	16.6	17.0	15.6	16.4	16.0	16.8	17.2
6H	16.1	16.7	16.5	17.1	17.6	16.3	17.0	16.8	17.4	17.8
8H	16.3	16.8	16.8	17.3	17.8	16.6	17.2	17.1	17.6	18.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
2.0H	+ 0.4 / - 0.4					+ 0.3 / - 0.4				

CIE Pub.117, 98.95 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -8.0)

Area: 0.03 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Oliver  
 Test Date:2022-10-28

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity:65.0%  
 Test Distance:2.519m [K=1.0000]  
 Remarks:


## UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	61	50	43	60	50	43	59	49	43	37
0.80	71	60	53	70	59	53	68	59	52	46
1.00	79	68	62	78	68	61	76	69	61	54
1.25	86	76	69	84	75	69	82	74	68	61
1.50	90	81	75	89	80	74	86	79	73	66
2.00	97	89	83	95	88	82	92	85	80	73
2.50	100	93	87	98	92	87	95	89	85	77
3.00	103	97	92	101	96	91	97	93	89	80
4.00	107	102	98	105	100	96	101	97	94	85
5.00	109	105	101	107	103	100	103	99	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2022-10-28

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.519m [K=1.0000]  
 Remarks:

## ISOCANDELA DIAGRAM

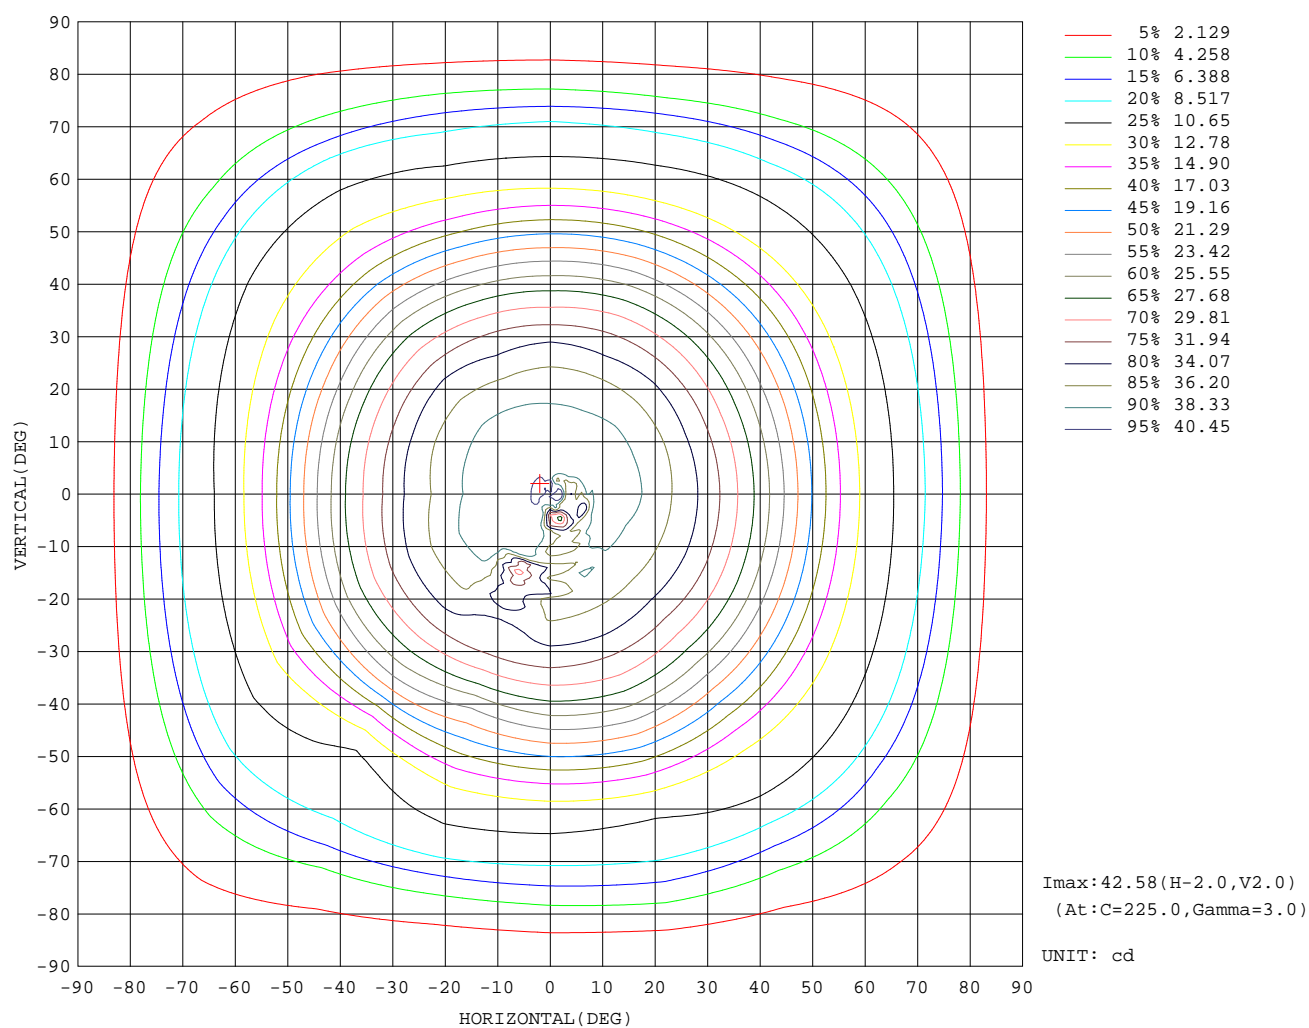


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2022-10-28

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.519m [K=1.0000]  
Remarks:




AAI Figure

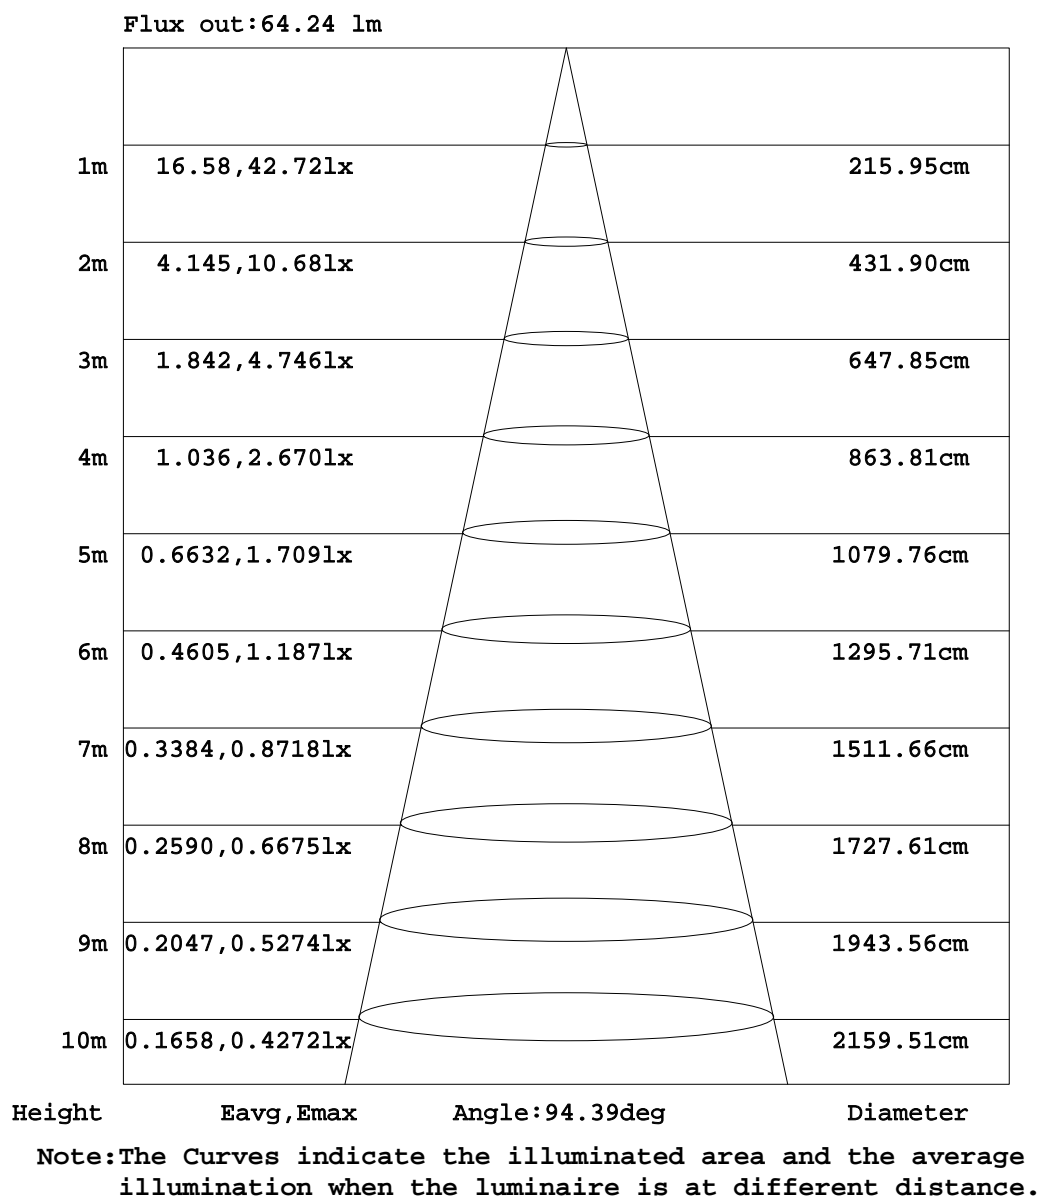

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2022-10-28

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.519m [K=1.0000]  
 Remarks:

## ISOLUX DIAGRAM

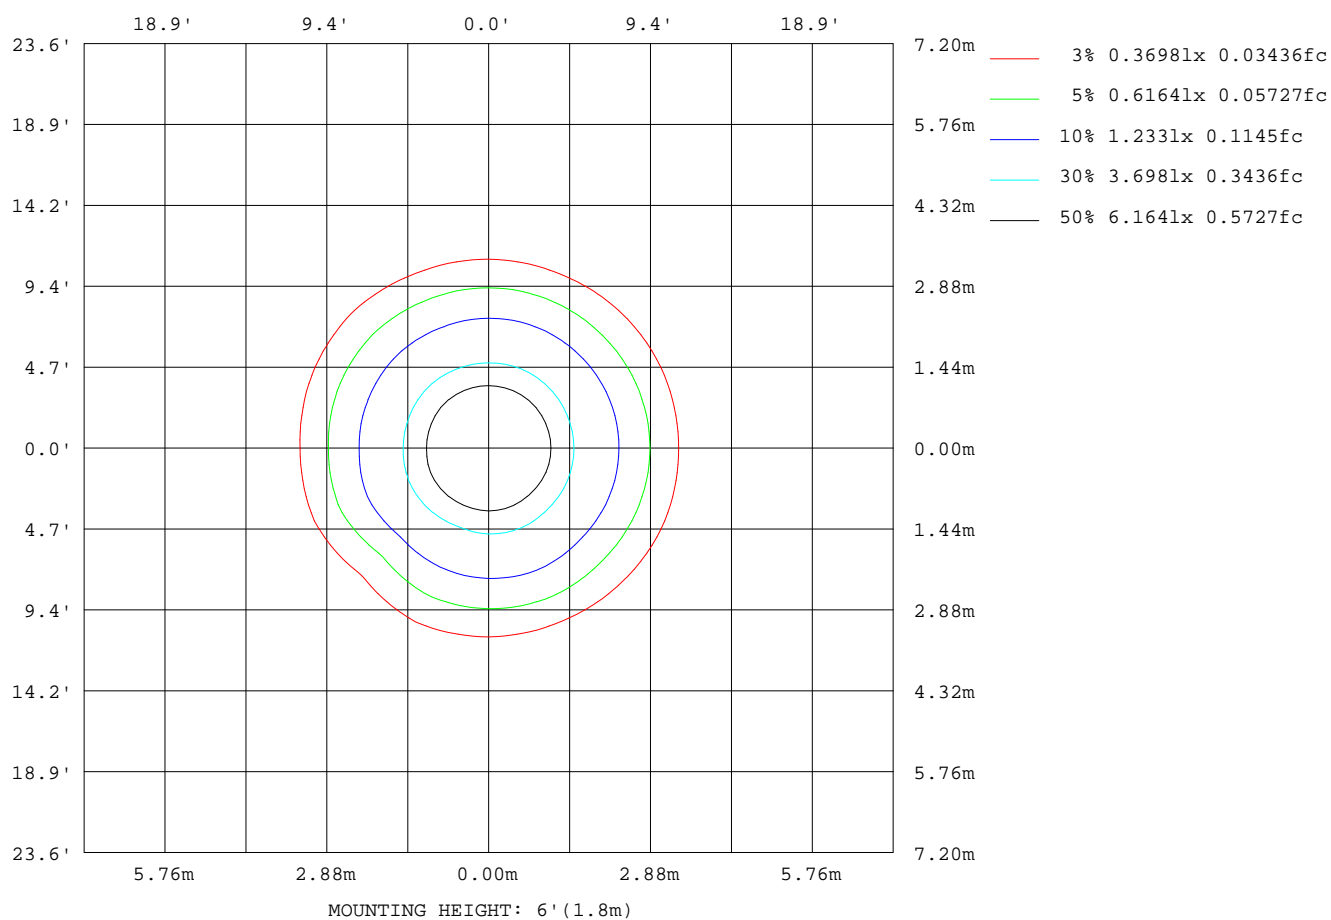

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2022-10-28

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.519m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:25.006V I:0.3058A P:7.6472W PF:1.0000 Freq:0Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:98.9482x1 lm		
NAME: 6841-B	TYPE: Landscape Lighting	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	846
L_0~180(75)av	799
L_0~180(85)av	504
L_90~270(65)av	797
L_90~270(75)av	722
L_90~270(85)av	482
L_45(65)av	838
L_45(75)av	676
L_45(85)av	441

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Oliver  
Test Date:2022-10-28

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity:65.0%  
Test Distance:2.519m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

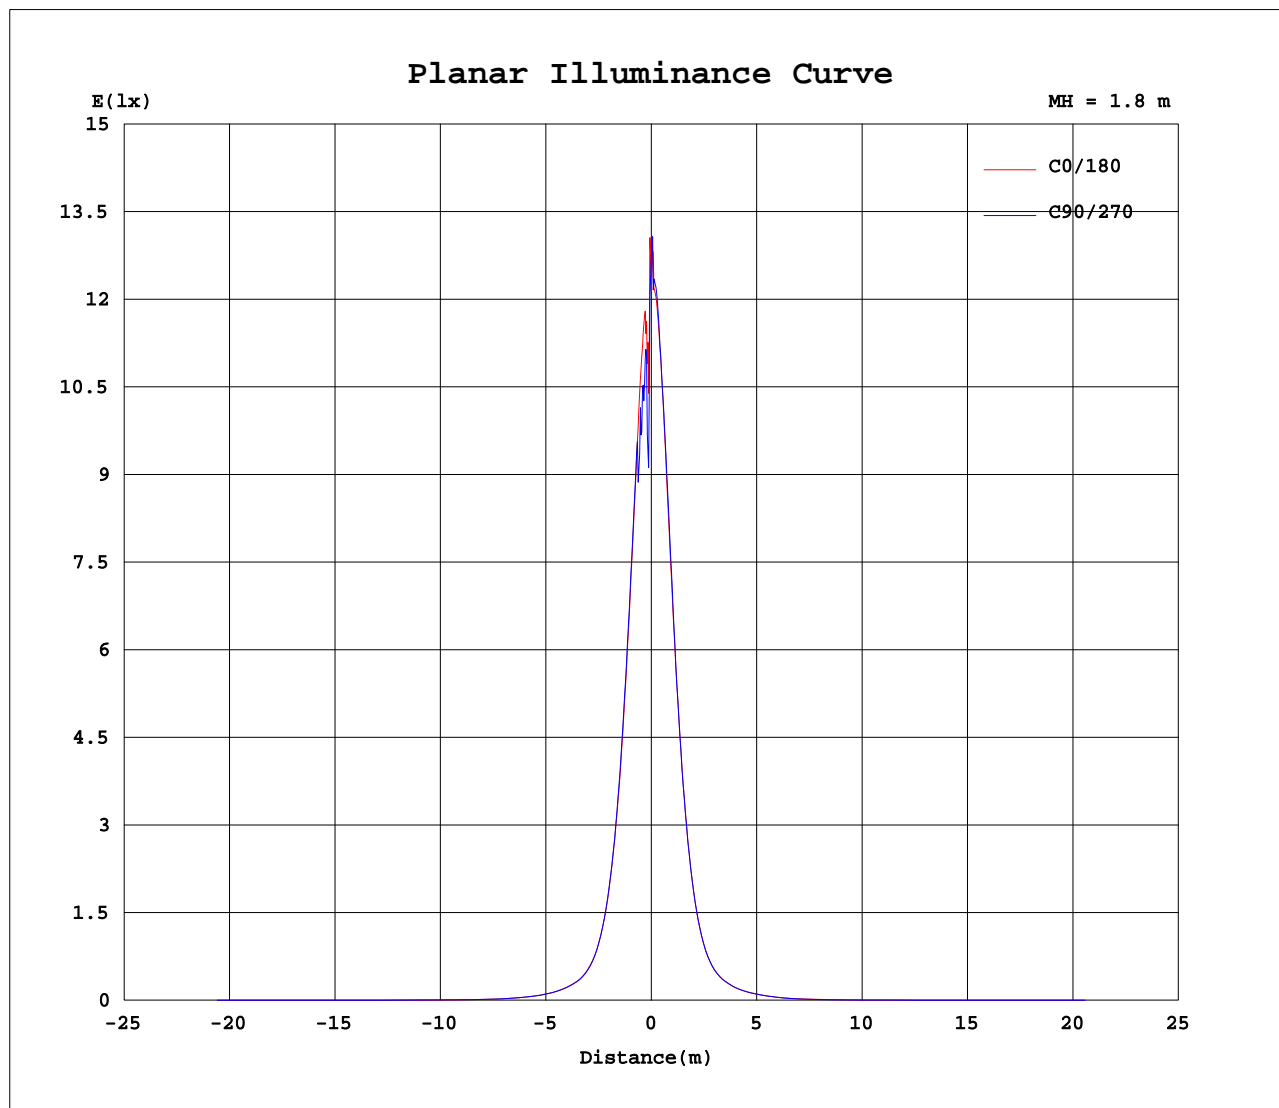

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Oliver  
Test Date: 2022-10-28

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
Humidity: 65.0%  
Test Distance: 2.519m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8	39.8			
5	37.4	36.3	35.2	26.3	29.7	39.7	40.5	40.2	40.3	40.4	40.4	41.0	38.9	39.4	39.4	35.4			
10	40.3	40.0	39.0	36.7	34.6	39.7	40.5	39.9	40.2	40.2	40.4	40.6	38.7	39.3	40.2	39.6			
15	39.4	38.9	38.6	37.8	33.5	31.0	39.6	39.3	39.2	39.4	39.5	39.6	37.4	38.5	39.4	38.9			
20	37.8	37.4	37.3	37.9	36.0	31.7	38.1	38.0	37.7	37.9	38.1	38.2	36.2	37.0	38.0	37.5			
25	35.9	35.7	35.5	36.0	34.5	34.5	36.2	36.0	35.8	36.1	36.3	36.1	34.6	35.3	36.1	35.6			
30	33.5	33.5	33.0	33.8	32.4	32.6	34.0	33.6	33.4	33.5	34.0	33.8	32.2	32.7	33.7	33.1			
35	30.7	30.6	30.3	31.2	29.6	29.8	31.0	30.8	30.6	30.7	31.0	30.9	29.0	30.0	30.6	30.1			
40	27.2	27.1	26.9	27.9	26.3	25.7	27.3	27.5	27.3	27.2	27.5	27.3	25.7	26.7	27.1	26.7			
45	23.4	23.2	23.0	24.1	22.5	21.7	23.1	23.5	23.2	23.2	23.5	23.2	22.1	22.9	23.3	22.9			
50	19.3	19.1	18.8	19.9	18.5	18.0	17.5	19.3	19.0	19.1	19.3	19.0	18.1	18.7	19.1	18.9			
55	15.3	15.1	14.8	15.7	14.5	14.3	12.6	15.1	15.0	15.3	15.2	15.0	14.4	14.7	15.1	15.0			
60	12.4	12.4	12.0	12.2	11.6	11.7	10.3	12.0	12.2	12.7	12.8	12.4	11.6	11.8	12.2	12.3			
65	10.9	11.0	10.9	10.6	10.2	10.4	9.65	10.5	10.5	11.0	11.1	10.6	10.0	10.4	10.8	10.8			
70	9.24	8.86	8.57	9.12	8.62	8.72	8.25	9.04	9.06	9.07	9.19	8.79	8.61	8.52	8.68	9.07			
75	6.23	5.35	5.31	6.50	5.95	5.58	5.15	6.34	6.18	5.41	5.38	5.51	5.26	5.17	5.15	5.68			
80	3.41	2.98	2.92	3.71	3.42	3.08	2.84	3.44	3.35	3.00	3.10	3.15	3.00	2.86	2.99	3.29			
85	1.30	1.08	1.01	1.55	1.41	1.20	1.18	1.49	1.33	1.23	1.33	1.15	1.11	1.06	1.09	1.17			
90	0.00	0.00	0.00	0.06	0.02	0.00	0.00	0.04	0.00	0.02	0.03	0.00	0.00	0.00	0.00	0.00			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Oliver  
 Test Date: 2022-10-28

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.428  
 Humidity: 65.0%  
 Test Distance: 2.519m [K=1.0000]  
 Remarks: