




DAKOTA FLUSH MOUNT

OL7613

General Product Information



Tools Required



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



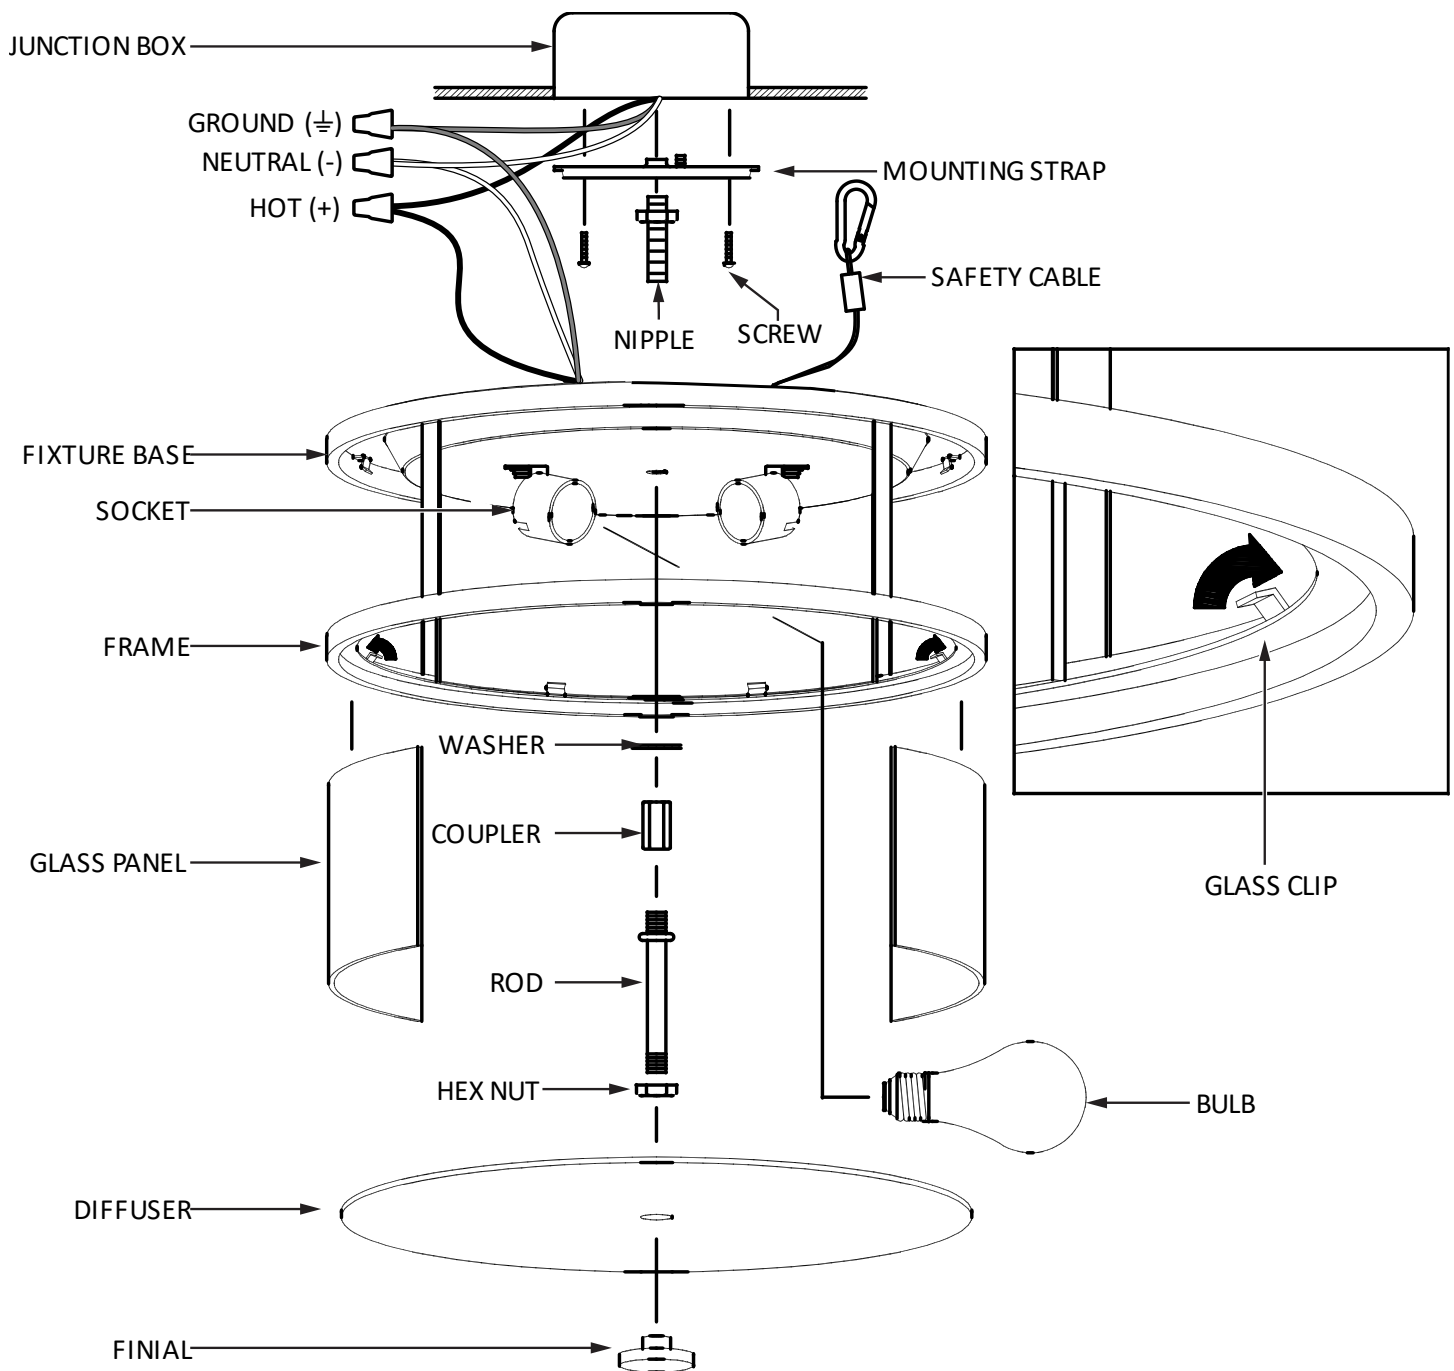

INSTRUCTIONS

I. Preparing for Installation

1. Remove the mounting strap from the canopy.
2. Install the glass panels:
 - a) Gently grasping a glass panel, slip it inside of the main frame. Make certain the top edge of the panel slides into the upper tabs located at the inside of the main frame.
 - b) Secure the glass panel by bending the tabs located at the bottom.
 - c) Repeat steps a) and b) for the rest of the panels.

3. Gently pull the supply wires out from the ceiling junction box.
4. Install the mounting strap to the junction box, ensuring that the supply wires are accessible. Install the mounting strap with the "GND" imprint and/or two dimples facing down.
5. Fasten one hex nut about 3/4" (19 mm) down from one end of the nipple.
6. Screw the same end of the threaded nipple into the center hole in the mounting strap,
7. Test-install the main frame onto the ceiling through the nipple, ensuring that 3/8" (10 mm) of the nipple protrudes below. If not, adjust the nipple location by screwing up or down as needed.
8. Once the correct nipple location has been adjusted, remove the main frame and tighten the hex nut against the mounting strap. Make certain not to spin the nipple during tightening.
9. Spread the electrical wires so that the black wires are on one side of the junction box and the white wires are on the other.

II. Wiring the Fixture

1. Connect the following wires with a wire nut:
 - a) Fixture neutral wire (white) to the outlet neutral wire (white)
 - b) Fixture hot wire (black) to the outlet hot wire (black)
 - c) Fixture ground wire (without insulation) to the outlet ground wire (usually with green insulation)

III. Installing the Fixture

1. Feed the threaded nipple through the center of the main frame so that it sits flush against the ceiling. Be sure all wires are tucked inside.
2. Install the safety cable to a secure structure in accordance with local codes.
3. Secure the main frame to the ceiling by fastening the washer and coupler onto the threaded nipple.
NOTE: The coupler must turn at least three times. If it does not, you must remove the coupler and lengthen the nipple accordingly.
4. Install the long, threaded rod by screwing it into the bottom of the coupler. Note the correct orientation of the rod, with the flange at the top, as in the illustration.
5. Install the bulb (not included). See the re-lamping label located at the socket area for the type and maximum allowed wattage.
6. Slip the glass diffuser through the long, threaded rod until it fits inside of the main frame.
7. Lock the diffuser by fastening the finial. Do not overtighten.