





Spec sheet

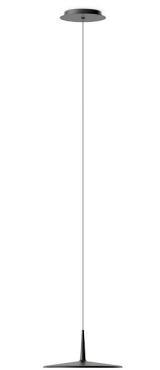

Optional: Extra cable length
Min. Quantity, upcharge and extra lead time
apply

Finish	11 Black NCS S 8500-N 37 Terra Red NCS S 4040-Y70R 24 Beige M1 NCS S 2005-Y50R 10 White NCS S 0300-N 42 Blue M1 NCS S 5010-B10G 47 Green L1 NCS S 4005-G80Y
LED color temperature	2700 K / 3000 K / 3500 K
Dimming	TRIAC / LUTRON / DALI-2 / 0-10V
Installation type	Built-in M / Surface / Remote Micro / Surface Free Wire
Materials	Body: Aluminum Diffuser: PMMA
Light source	1 x LED 9.3W 350mA
LED	CRI>90 1215 lm 130.6 2700 K / 3000 K / 3500 K
Driver	Constant Current 350 120 V V 50~60 Hz HZ
Application	Pendants
Packaging	1 Box 13.98 m x 13.98 m x 9.65 m Gross weight 6.17 Net weight 5.55 Vol. 1.0877

Lighting effect
General lighting - opaque shade
Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.

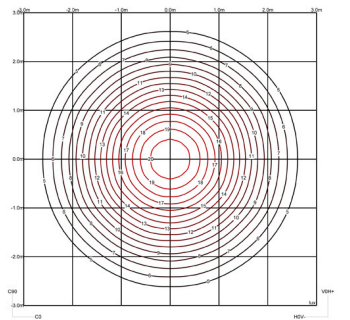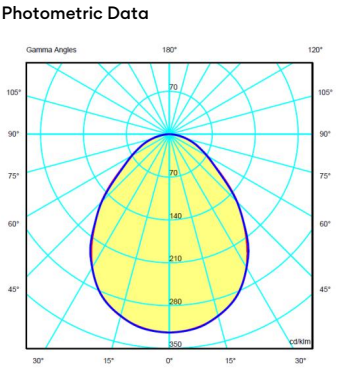

Efficiency	100%
Coordination System	CG
Total Flux	1089 lm
Maximum Value	438.84 cd/klm