


AJ WALL

Designed by Arne Jacobsen

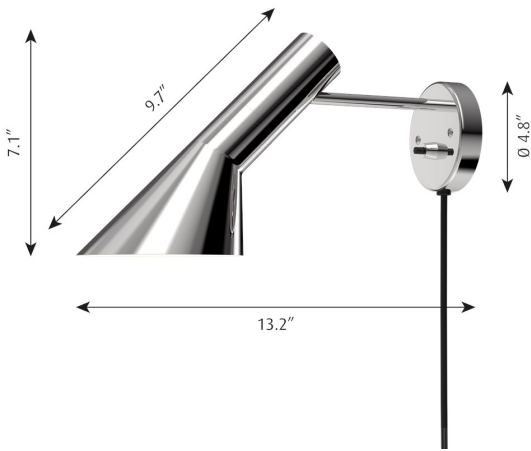

Description The wall lamp emits downward directed light. The angle of the shade and rotation can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.

Variants	VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
	5743907274	WHT, 024	13.2 / 7.1 / - IN / 2.0 LB
	5743907287	BLACK, 314	13.2 / 7.1 / - IN / 2.0 LB
	5743907368	PALE PETROLEUM, 447	13.2 / 7.1 / - IN / 2.0 LB
	5743914348	STAINL STEEL POLISH, 957	13.2 / 7.1 / - IN / 2.1 LB
	5743915091	WHT, 024	13.2 / 7.1 / - IN / 2.0 LB
	5743915101	BLACK, 314	13.2 / 7.1 / - IN / 2.0 LB
	5743915185	PALE PETROLEUM, 447	13.2 / 7.1 / - IN / 2.0 LB
	5743915224	STAINL STEEL POLISH, 957	- / - / - IN / 2.1 LB
	5743917882	ELECTRIC ORANGE	- / - / - IN / 2.0 LB
	5743917895	SOFT LEMON	- / - / - IN / 2.0 LB
	5743917905	WARM SAND	- / - / - IN / 2.0 LB
	5743917918	DUSTY BLUE	- / - / - IN / 2.0 LB
	5743917921	WARM GREY	- / - / - IN / 2.0 LB
	5743917934	ELECTRIC ORANGE	- / - / - IN / 2.0 LB
	5743917947	SOFT LEMON	- / - / - IN / 2.0 LB
	5743917950	WARM SAND	- / - / - IN / 2.0 LB
	5743917963	DUSTY BLUE	- / - / - IN / 2.0 LB
	5743917976	WARM GREY	- / - / - IN / 2.0 LB

Materials & Finishes

MATERIALS

Shade: Spun steel or stainless steel. Wall box: Spun steel or deep drawn stainless steel. Arm: Steel or stainless steel.

FINISHES

Dark green, dark grey, aubergine, light grey, midnight blue, pale petroleum, rusty red, yellow ochre, black or white, wet painted.

Mounting


Mounted directly to finished surface over a 4" octagonal junction-box.
On/off switch on the wall plate, white for white finish, black for non-white finishes.
Variants without on/off switch to be remotely controlled. For mounting instructions, see download section on the product detail page.

Information


Electrical:
Wattage: 10W
Delivered lumens: 263
Efficacy: 26.3 lm/W
Certifications:
cULus, Dry Location
Protection class IP20
Controllability: Phase Dimming
Color Rendering: Ra≥90 For the E-socket product variants, bulbs are not included. LED light source is part of the product.

Light distribution diagrams


CARTESIAN

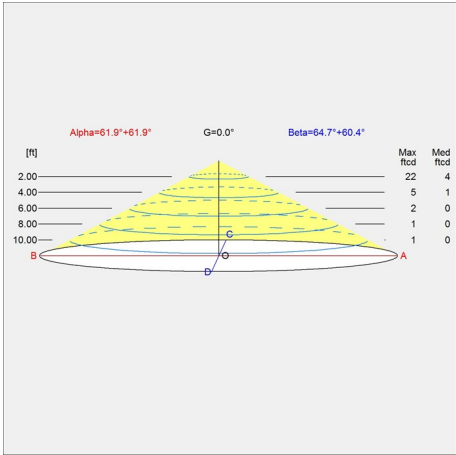

ISOLUX

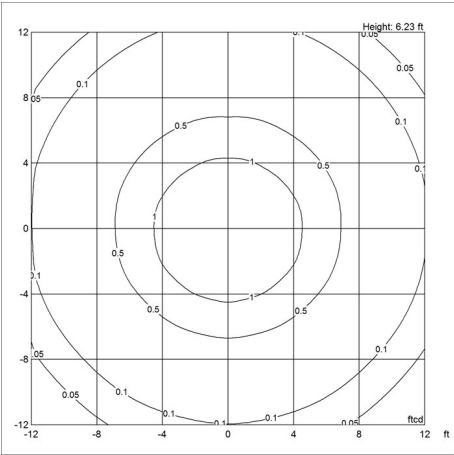

POLAR

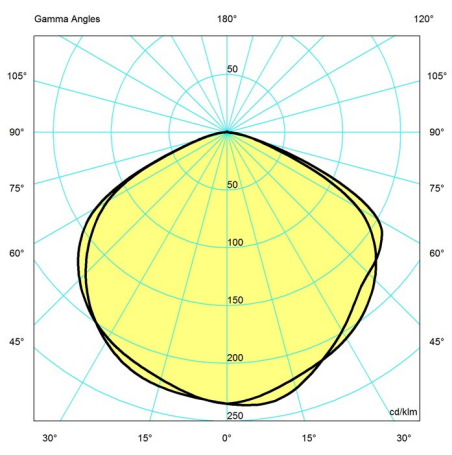

Variant Options For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5743907274	G16.5/candelabra	120V	263	-	Without cord
5743907287	G16.5/candelabra	120V	263	-	Without cord
5743907368	G16.5/candelabra	120V	263	-	Without cord
5743914348	G16.5/candelabra	120V	263	-	Without cord
5743915091	G16.5/candelabra	120V	263	-	Without cord
5743915101	G16.5/candelabra	120V	263	-	Without cord
5743915185	G16.5/candelabra	120V	263	-	Without cord
5743915224	G16.5/candelabra	120V		-	Without cord
5743917882	G16.5/candelabra	120V		-	Without cord
5743917895	G16.5/candelabra	120V		-	Without cord
5743917905	G16.5/candelabra	120V		-	Without cord
5743917918	G16.5/candelabra	120V		-	Without cord
5743917921	G16.5/candelabra	120V		-	Without cord
5743917934	G16.5/candelabra	120V		-	Without cord
5743917947	G16.5/candelabra	120V		-	Without cord
5743917950	G16.5/candelabra	120V		-	Without cord
5743917963	G16.5/candelabra	120V		-	Without cord
5743917976	G16.5/candelabra	120V		-	Without cord