

Kelan Pendant

AP1186, AP1193 | 1.0

GENERATION LIGHTING PENDANT

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

**GENERATION LIGHTING**


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500

www.generationlighting.com

Install the Fixture

IA

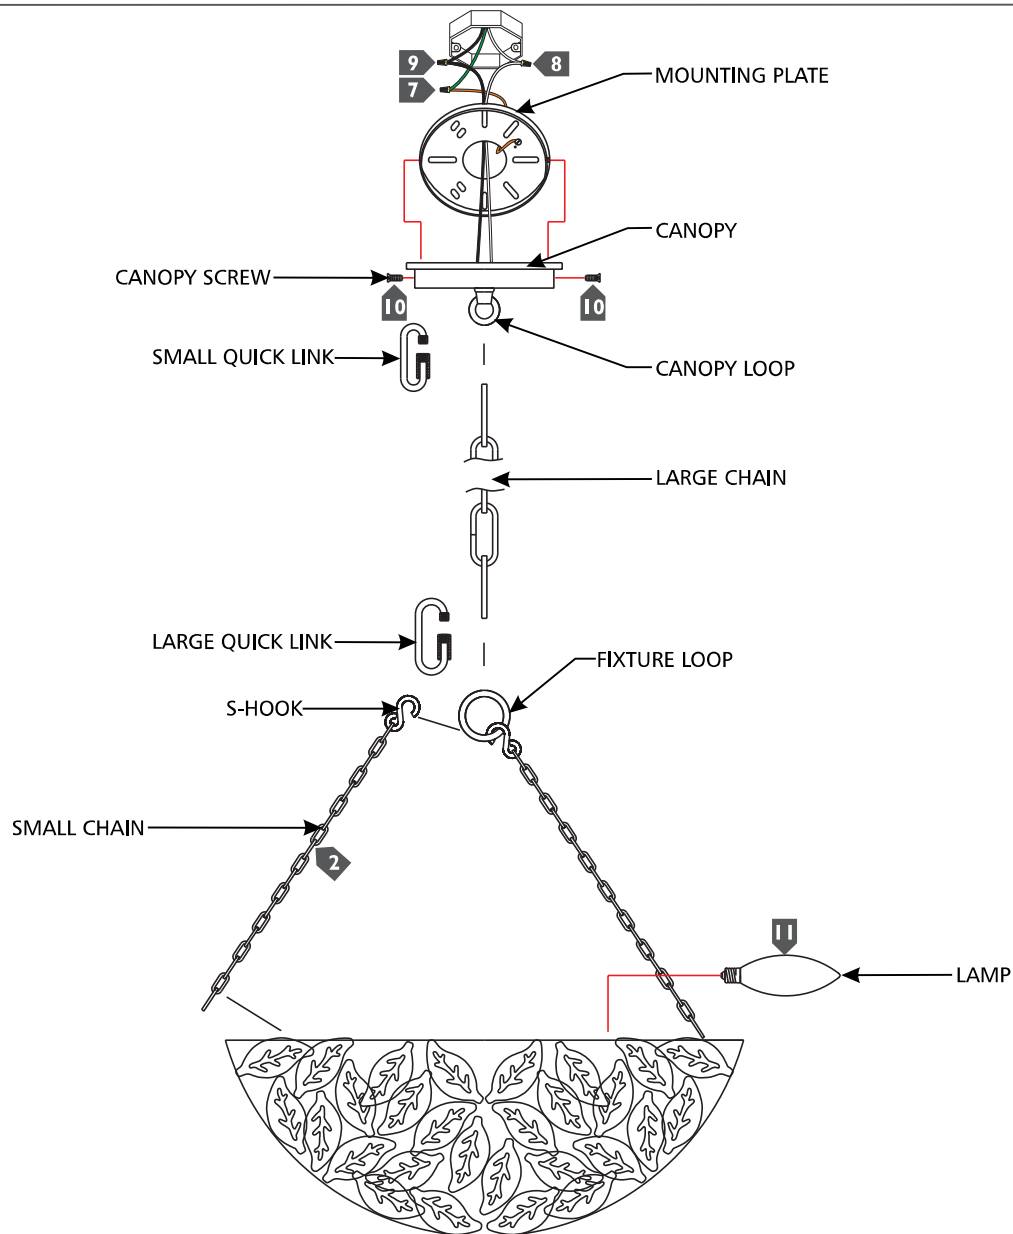

- 1** Secure the mounting plate to the junction box.
- 2** Attach the end of the small chain with the s-hook to the fixture loop, then attach the other end of the small chain to the shade assembly.
- 3** Determine the wanted height of the fixture and remove a portion of the large chain from the bottom by opening a link with pliers.
- 4** Install a large quick link to bottom end of the large chain, then secure the large quick link onto the fixture loop.
- 5** Install a small quick link onto the remaining end of the large chain, then secure the small quick link onto the canopy loop.
- 6** Weave the cord through the large chain, canopy loop, and canopy. Trim the cord leaving enough to make electrical connections.
- 7** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 8** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 9** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 10** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the canopy screws.
- 11** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.