
ASSEMBLY INSTRUCTIONS

ARTERIORS

ITEM DESCRIPTION:

ITEM NO.: DFI13	**NAME:** Jali Flush Mount
MATERIAL TYPE: Brass	**FINISH:** Vintage Brass
SOCKET TYPE: E12 TYPE B	**SOCKET QTY:** 12
BULB WATTAGE: 40W / 10W CFL / 9W LED	**VOLTAGE:** 110V-120V
ITEM NET WEIGHT: 25.9 LBS	



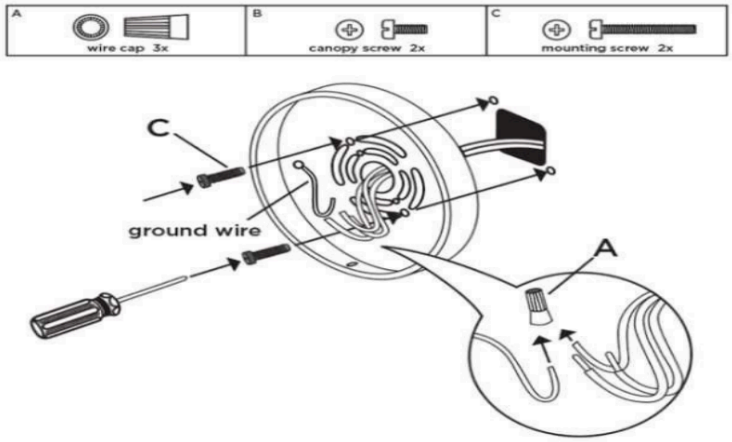

PARTS INCLUDED:

Mounting Plate	1	Back Plate	1

HARDWARE INCLUDED:

Mounting Screw	2	Plastic Wire Connector	2
Green Ground Screw	1		

TO INSTALL YOU WILL NEED:

- Phillips Screwdriver

TO ASSEMBLE:

1. Shut off power at the main fuse box or circuit breaker.
2. Carefully unpack all parts and hardware and lay them on a soft surface.
3. Gently pull the wires down from the junction box and let them hang.
4. Turn the round knob under the canopy counterclockwise to remove it, then separate the mounting plate from the fixture.
5. Attach the mounting plate to the junction box with the mounting screws, using a Phillips screwdriver.
6. Connect the fixture ground wire (green or bare) to the junction box ground wire (usually green or bare) with a wire connector and wrap with electrical tape. If there is no ground wire in the box, attach the fixture ground wire to the green ground screw on the mounting plate.
7. Connect the white (neutral) fixture wire to the white junction box wire with a wire connector and wrap with electrical tape.
8. Connect the black (hot) fixture wire to the black junction box wire with a wire connector and wrap with electrical tape. Make sure no wire strands are exposed.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

9. Gently tuck all connections into the junction box.
10. Lift the fixture onto the threaded nipple of the mounting plate and turn the round knob clockwise until the canopy is flush with the ceiling.
11. Insert twelve Type B bulbs, max 40W (or 10W CFL / 9W LED), not included, into the sockets. Do not exceed the maximum wattage.
12. Restore power at the breaker and test the fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect the finish, avoid chemicals and household cleaners.

These instructions are provided for your safety. Read them carefully and completely before beginning installation. We strongly recommend that all hard-wired fixtures be installed by a licensed electrician.

Customer service: 1-800-338-2150