

NEED HELP?
Call or Email us first

Our service team is ready to answer your questions...
1-800-265-1833 (English) / 1-800-567-2513 (French)
IN CANADA - ressaiescanada@canarmna.ca - IN USA - ressaiesusa@canarmna.ca

Monday – Friday
8 AM - 5 PM EST.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS

TOOLS AND MATERIALS REQUIRED:




Phillips
Screwdriver



Wrench



Pliers



Drill




Wiring supplies
as required by
local electrical
code

SAFETY PRECAUTIONS:

1. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
2. USE CHAIN TO SUPPORT THE FIXTURE. DO NOT USE THE ELECTRICAL CORD TO HANG THE FIXTURE. USE THE RUBBERIZED "S" HOOK TO HANG THE CORD. PERIODICALLY CHECK SUSPENSION CHAIN AND THE HOOK. DO NOT ALTER THE PLUG.
3. DO NOT INSTALL ON RADIANT-HEATING TYPE CEILING.
4. UNPLUG FIXTURE BEFORE INSTALLING OR REMOVING BULB.
5. UNPLUG WHEN NOT IN USE.
6. TO CLEAN THE FIXTURE, TURN OFF THE POWER, WAIT FOR IT TO COOL, AND WIPE THE FIXTURE WITH A CLEAN, SOFT CLOTH.

NOTE: Product may not look exactly as shown in figures.

INSTALLATION:

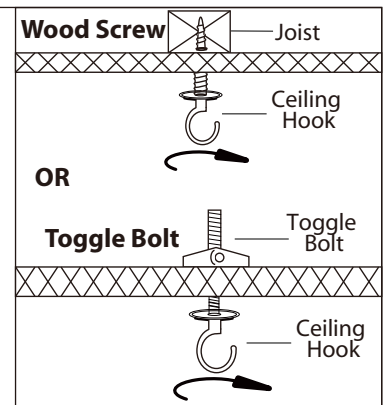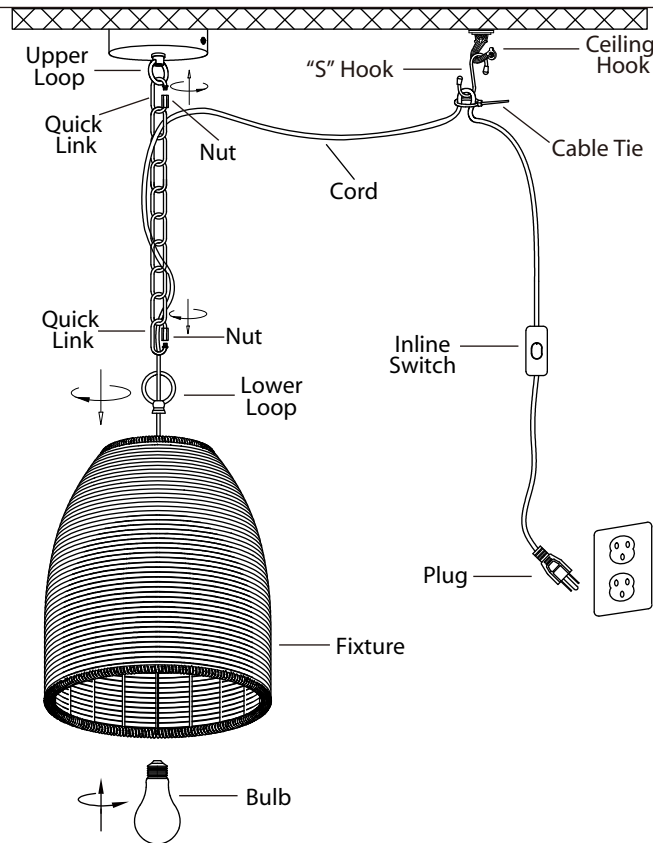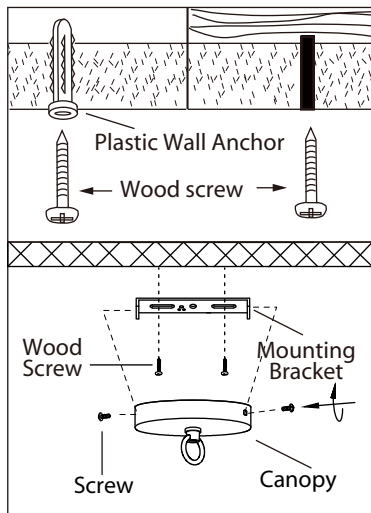

1. Decide a suitable location where you want your light fixture to be positioned. Determine your mounting method. Mark two spots on the ceiling for the mounting hardware.

2. Install the canopy to desired spot on the ceiling. Drill two pilot holes to install the mounting bracket to the ceiling. Determine the appropriate way (wood screws for the wooden studs or plastic wall anchor and wood screws for dry wall) of fastening the fixture to the ceiling. Attach the canopy to the mounting bracket by tightening the 2 screws.

3. Tighten the lower loop to the stem on the fixture.

4. Hang your fixture by the chain at desired height level. Connect the chain to the lower loop and the upper loop using the two quick links.
Seal the opening on the quick link by screwing the nut.

5. Decide which electrical outlet you wish to plug your fixture into for power. Position the ceiling hook directly above the chosen electrical outlet. Secure ceiling hook (provided) to ceiling. Secure directly to a ceiling joist by using a wood hook or in the case of a hollow ceiling, use the toggle bolt provided.

6. Suspend pendant to desired length from ceiling, make a loop in cord and fasten with cable tie. Attach one end of rubberized "S" hook to ceiling hook and other end to the cord.

7. Install proper bulb type and wattage (not included).