

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
Note: \_\_\_\_\_ SKU#: SP - LGD - MU - 02 - \_\_\_\_ - \_\_\_\_ - \_\_\_\_ - \_\_\_\_ - \_\_\_\_

## Description

Unique in both form and function, the Mushroom pendant features a round clear acrylic diffuser with a frosted concave impression. Light from the integrated LED source creates even distribution through the diffuser and a playful glow in any space.

## Features

- Screw-in, decorative optical acrylic light guide
- Suspends from an 8' adjustable cable
- Damp location rated



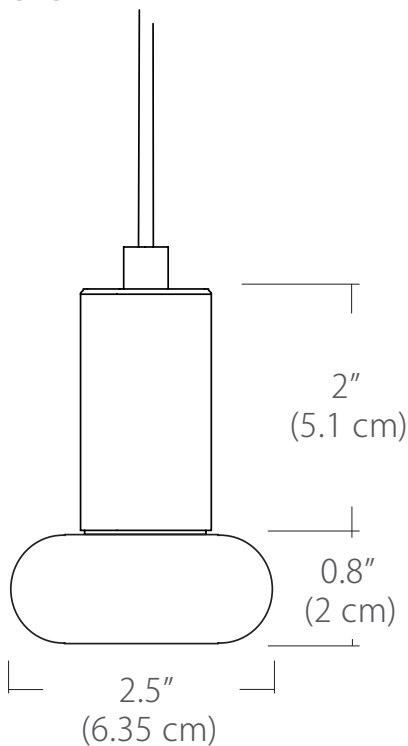
## Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Cable Length: 8' (for longer lengths consult factory)
- For recommended dimmers, see <http://blackjacklighting.com>

## Options

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- Lumens: 2W/86 Lumens or 3W/133 Lumens (recommended for single pendant application)
- Lamping: 2W or 3W
- Standard Finishes: BL - Black, PC - Polished Chrome or WH - White
- Special Order Powder Coat Finishes: BZ - Bronze, SG - Satin Gold or SS - Satin Silver
- Mounting: See page 2 for mounting options

## Dimensions



## Diffuser



## ORDERING GUIDE

Category	Series	Diffuser	Size	Finish	Color Temp.	Wattage	Mounting	Length
<b>SP</b>	<b>LGD</b>	<b>MU</b>	<b>02</b>		<b>30K</b>			
SP Small Pendant	LGD Light Guide	MU Mushroom	02 2.5" Height	<b>Standard</b> BL Black PC Polished Chrome WH White <b>Special Order</b> BZ Bronze SG Satin Gold SS Satin Silver	27K 2700K 30K 3000K 35K 3500K 40K 4000K  (30K Standard)	2W 2Watts / 86 Lm 3W 3Watts / 133 Lm (recommended for single pendant application)	SP5 5" Canopy SP2 2.5" Fascia Canopy MPC Multi-Port Connector JTA JackTrack Adapter	96" Standard (Change Length for custom cable length in inches)

Example: SP-LGD-MU-02-BL-30K-2W-SP5-96

## Finish

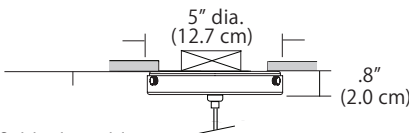



Finish						
<div></div> PC BL WH BZ SG SS						
	PC - Polished Chrome	BL - Matte Black	WH - White	BZ - Bronze	SG - Satin Gold	SS - Satin Silver
	Standard Finishes			Special Order Powder Coat Finishes		

## Wattage

Wattage	
<div></div> 2W 3W	<p>2W = 2 Watts / 86 Lumens, recommended for Multi-Port applications (Multi-Port system and JackTrack adapter). 3W = 3 Watts / 133 Lumens, recommended for single pendant applications (5" Canopy and 2.5" Fascia Canopy).</p> <p>(Lumens measured at 3000K)</p>

## Mounting

Mounting	
<div></div> SP5 SP2 MPC JTA	<p><b>SP5</b> = 5" canopy with integrated driver (included), attaches to rear of canopy and sits inside ceiling mounted junction box Cable with modular connector attaches to canopy w/ integrated universal driver (120-277V / TRIAC, ELV, 0-10V dimming)</p> <p><b>SP2</b> = 2.5" thin profile canopy that attaches flush to a rigid ceiling (driver sold separately) Cable with modular connector (and optional wire harness) attaches to a remote driver</p> <p><b>MPC</b> = Multi-port connector attaches to any of BlackJack's Multi-Port canopies (canopy and driver sold separately) Cable with modular connector attaches to a driver inside a Multi-Port canopy (driver may be remote)</p> <p><b>JTA</b> = Adapter connects the pendant in any position along the JackTrack system (track and driver sold separately) Cable is cut to length and inserted in a connector at the bottom of the JackTrack adapter</p>
























SP5 5" Canopy (integrated driver)	SP2 2.5" Fascia Canopy (driver sold separately)	MPC Multi-Port Connector (canopy and driver sold separately)	JTA JackTrack Adapter (track and driver sold separately)
 <p>5" dia. (12.7 cm)</p> <p>.8" (2.0 cm)</p> <p>field adjustable 2" to 96" (5.8 cm to 244 cm)</p> <p>(For longer length consult factory)</p>	 <p>2.5" dia. (6.4 cm)</p> <p>.4" (1.2 cm)</p> <p>field adjustable 2" to 96" (5.8 cm to 244 cm)</p>	 <p>.5" dia. (1.3 cm)</p> <p>field adjustable 2" to 96" (5.8 cm to 244 cm)</p> <p>(For longer length or pre-adjustment consult factory)</p>	 <p>1" dia. (2.5 cm)</p> <p>96" (field-cut to length)</p> <p>(For longer lengths or to be pre-cut consult factory)</p>

## Max Cable Length

Length	
<div></div> 96" (Standard) Custom	<p>96" (Standard) (Change Length for custom cable length, in inches)</p> <p>Factory pre-configuration of cable length is available. Consult factory for details.</p>

For full specifications and ordering information, see [blackjacklighting.com](http://blackjacklighting.com)

(# symbol indicates additional specification required)

Pendant Mounting	Canopy	Dimensions	End / Side View	Finish Options
SP5	<b>5" Canopy</b> Canopy and driver included with pendant		 (Integrated Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
SP2	<b>2.5" Fascia Canopy</b> Canopy included with pendant. Driver sold separately.		 (Remote Driver required)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
MPC	<b>24" Multi-Port Square - 9 Port</b> C-MPS-2409-#  <b>24" Multi-Port Square - 25 Port</b> C-MPS-2425-#	 9 Port  25 Port	 (Integrated or Remote Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
MPC	<b>38" Multi-Port Rectangle - 10 Port</b> C-MPT-3810-#  <b>38" Multi-Port Rectangle - 18 Port</b> C-MPT-3818-#	 10 Port  18 Port	 (Integrated or Remote Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
MPC	<b>22" Multi-Port Linear - 5 Port</b> C-MPL-2205-#  <b>48" Multi-Port Linear - 11 Port</b> C-MPL-4811-#	 5 Port  11 Port	 (Integrated or Remote Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
MPC	<b>10" Round - 3 Port</b> C-MPR-1003-#  <b>10" Round - 9 Port</b> C-MPR-1009-#	 3 Port  9 Port	 (Integrated Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
MPC	<b>20" Round - 3 Port</b> C-MPR-2003-#  <b>20" Round - 12 Port</b> C-MPR-2012-#	 3 Port  12 Port	 (Integrated Driver)	<b>BL</b> Matte Black <b>PC</b> Pol. Chrome <b>WH</b> White <b>SG</b> Satin Gold <b>BZ</b> Bronze <b>SS</b> Satin Silver
JTA	<b>24" JackTrack</b> See Spec Sheet for details  <b>48" JackTrack</b> See Spec Sheet for details  <b>94" JackTrack</b> See Spec Sheet for details	  	 (Integrated or Remote Driver)	<b>BL</b> Matte Black <b>WH</b> White


System	Pendant Mounting	Configuration Examples	Finish Options
--------	------------------	------------------------	----------------

## Quatro


**Square Configurations** - See [Quatro Square Configurations](#) section of our website for specification information (#)

**4S (4' 2x2 / 9 Port)**  
MSQ-2409-#-#-4S-#-#

MPC



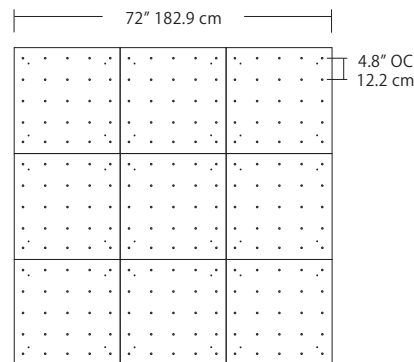
**6S (6' 3x3 / 25 Port)**  
MSQ-2425-#-#-6S-#-#




**BL** Matte Black  
**PC** Pol. Chrome  
**WH** White  
**SG** Satin Gold  
**BZ** Bronze  
**SS** Satin Silver

**Linear Configurations** - See [Quatro Linear Configurations](#) section of our website for specification information (#)

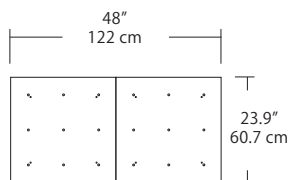**4L (4'x2' / 9 Port)**  
MSQ-2409-#-#-4L-#-#



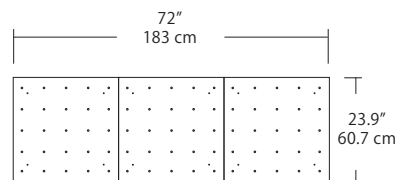**6L (6'x2' / 25 Port)**  
MSQ-2425-#-#-6L-#-#




## Duo


**Linear Configurations** - See [Duo Linear Configurations](#) section of our website for specification information (#)

**6L (6'4"x6" / 10 Port)**  
MSD-3810-#-#-6L-#-#

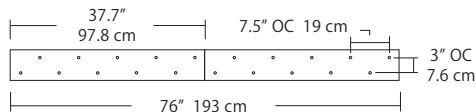MPC




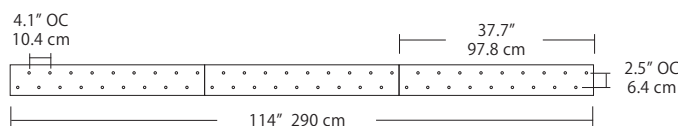
**9L (9'6"x6" / 18 Port)**  
MSD-3818-#-#-9L-#-#



**BL** Matte Black  
**PC** Pol. Chrome  
**WH** White  
**SG** Satin Gold  
**BZ** Bronze  
**SS** Satin Silver


## Solo

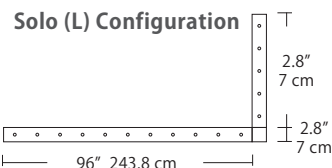**Solo 48" Linear Configuration** - See [Solo Linear Configuration](#) section of our website for specific information (#)




**Solo 22" Grid Configuration** - See [Solo Grid Configuration](#) section of our website for specific information (#)

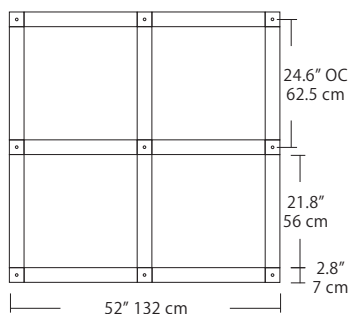MPC



**Solo 48" Grid Configuration**

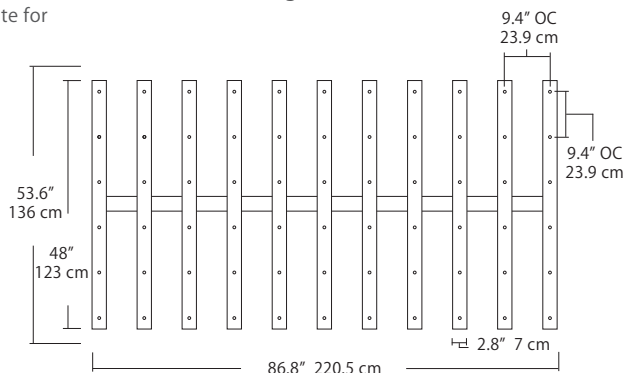

**BL** Matte Black  
**PC** Pol. Chrome  
**WH** White  
**SG** Satin Gold  
**BZ** Bronze  
**SS** Satin Silver