Installation Instructions for Cw1081

# Hanover Wall

CW1081 1.1

## GENERATION LIGHTING PENDANT

### **GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction

This product is safety listed for damp locations.


This instruction shows a typical installation.

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

## **SAVE THESE INSTRUCTIONS!**

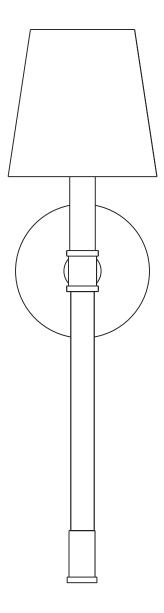


GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500

www.generationlighting.com

VISUAL COMFORT & CO.

## Install the Fixture

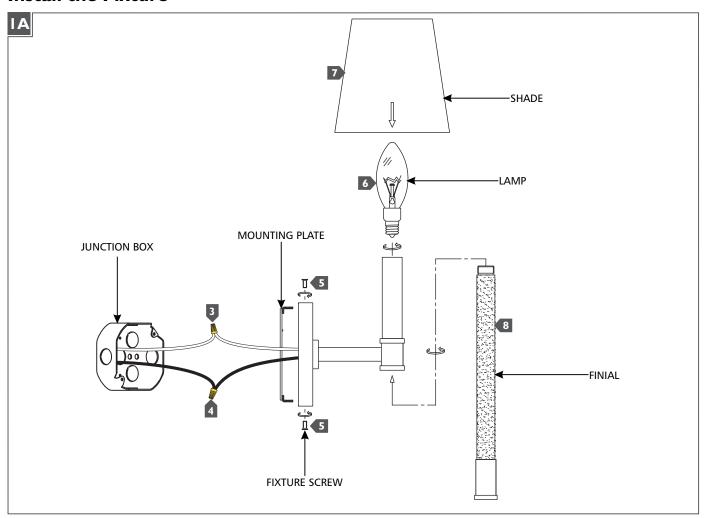

- Secure the mounting plate to the junction box.
- 2 Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire to the hot power line wire with a wire nut.
- Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate, and secure it in place using the fixture screws.
- 6 Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage information.
- 7 Install the shade by placing it over the lamp.
- 8 Screw the finial to the bottom of the fixture.