

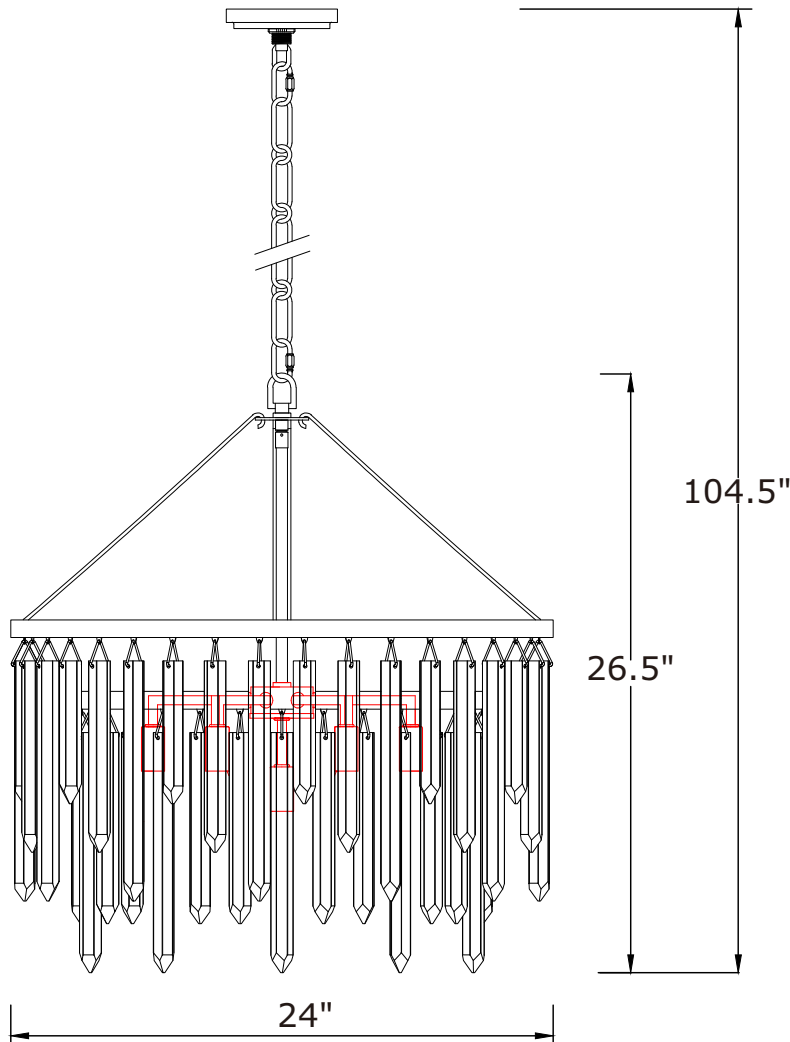
CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL #GEM-7004-MG-SS



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

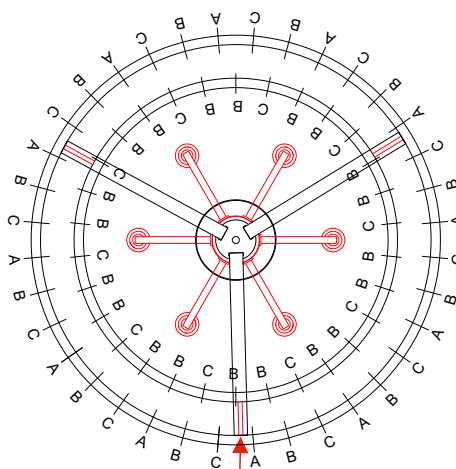
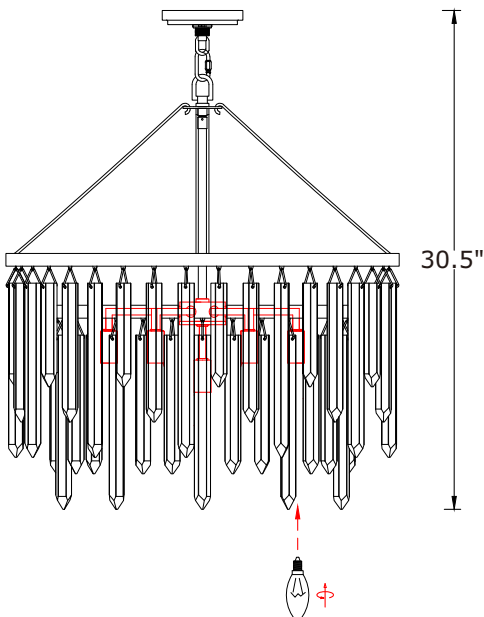


You will need 7 -Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED




How to Install

1. Determine preferred hanging height and adjust to the required chain.
2. Feed the wire through the check ring and the stem. Then screw the stem onto the top of the light cluster.
3. Take a flat metal rod, and locate the side with the straight end. Align the hole on the rod with the hole on the interior of the top banding ring on the frame. Secure it with the screws. Do not overtighten the screws until the step 4 is completed. Repeat this process for other rods.
4. Slide the frame over the light cluster and hook the flat metal rod onto the metal plate on the top of the light cluster.
5. Raise the fixture up to the ceiling and do the wire connection. Secure the canopy with the collar ring.
6. Insert recommended bulb (not included) into the socket.
7. Hang the crystal rod onto the frame using the cap nut.



When hanging the crystal, start from this side

Crystal Rod

- A  12 Pieces 160mm
- B  32 Pieces 215mm
- C  22 Pieces 270mm

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.



PART NUMBER MODEL #GEM-7004-MG-SS

Part Number

