

McHenry Outdoor Flush Mount (LED)

OL12813-L1

1.1

GENERATION LIGHTING

Outdoor

GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

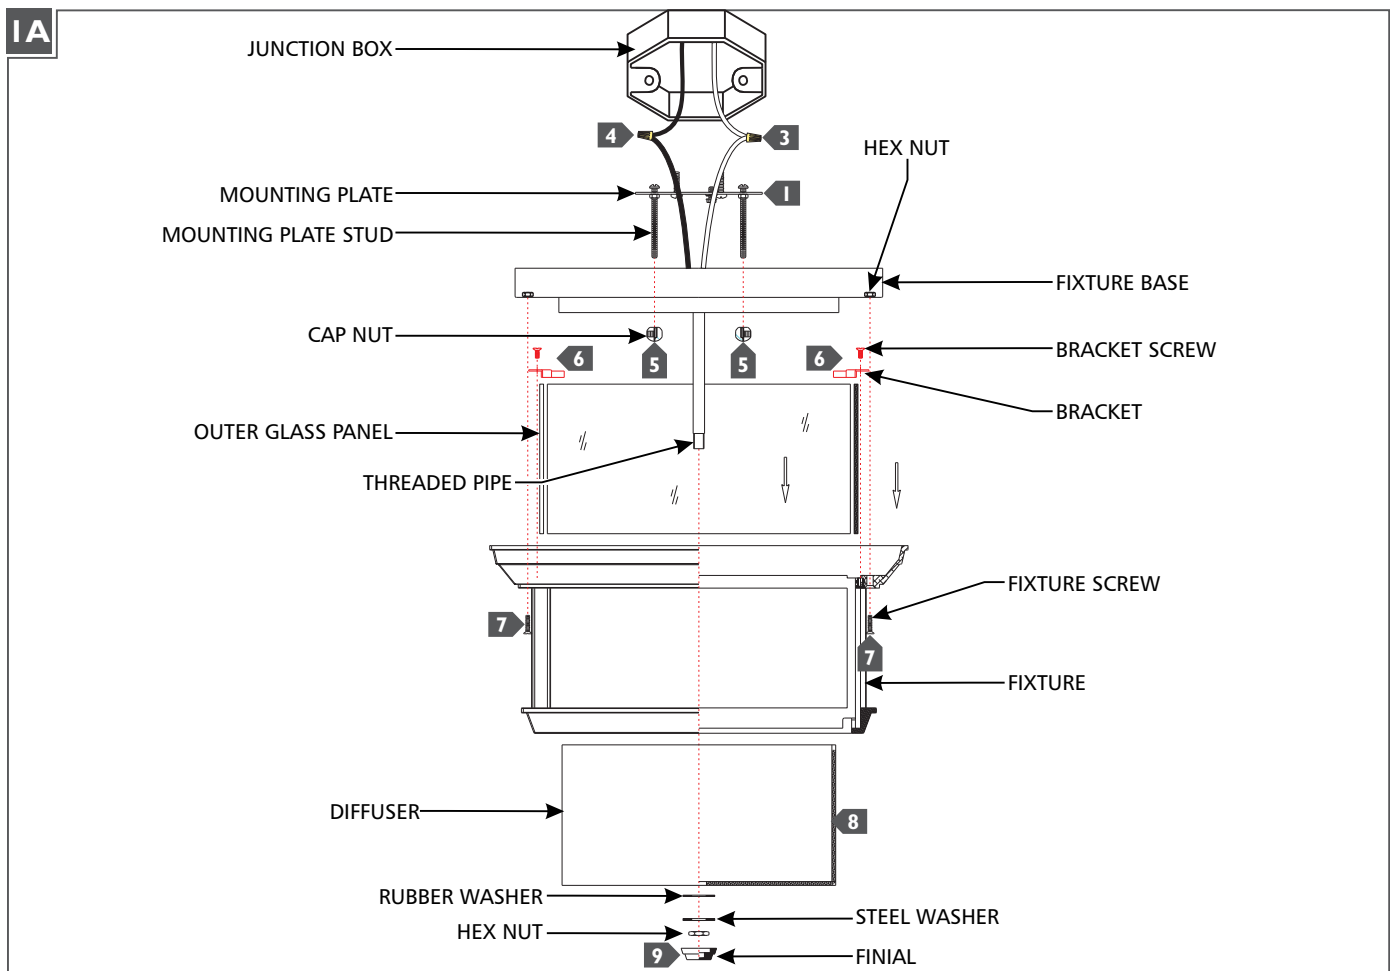

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire to the hot power line wire with a wire nut.
- 5** Place the fixture base onto the mounting plate studs and secure it with the two cap nuts.
- 6** Install the outer glass panels by inserting them into the fixture and securing them with the brackets and bracket screws.
- 7** Install the fixture to the fixture base by screwing the fixture screws into the hex nuts in the fixture base.
- 8** Place the diffuser, rubber washer, and steel washer onto the threaded pipe (in that order) and secure in place with the hex nut.
- 9** Screw the finial onto the threaded pipe.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.