

Simon I Light Wall

EW1041 1.1

GENERATION LIGHTING

Wall

GENERAL PRODUCT INFORMATION:

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

These instructions show a typical installation.

IMPORTANT SAFETY INSTRUCTIONS

This fixture has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to defeat this safety feature.

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

SAVE THESE INSTRUCTIONS!

IA

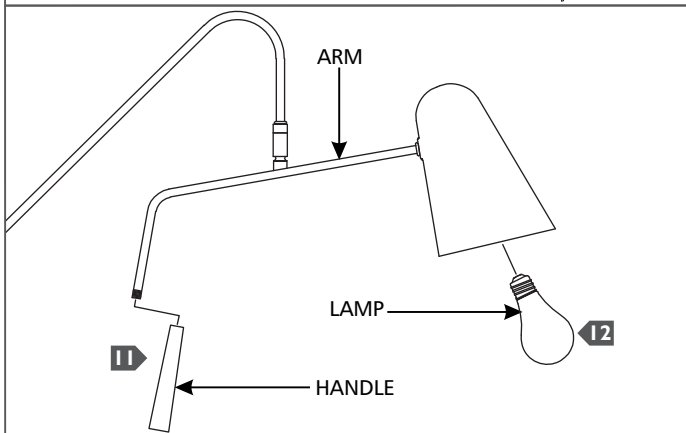
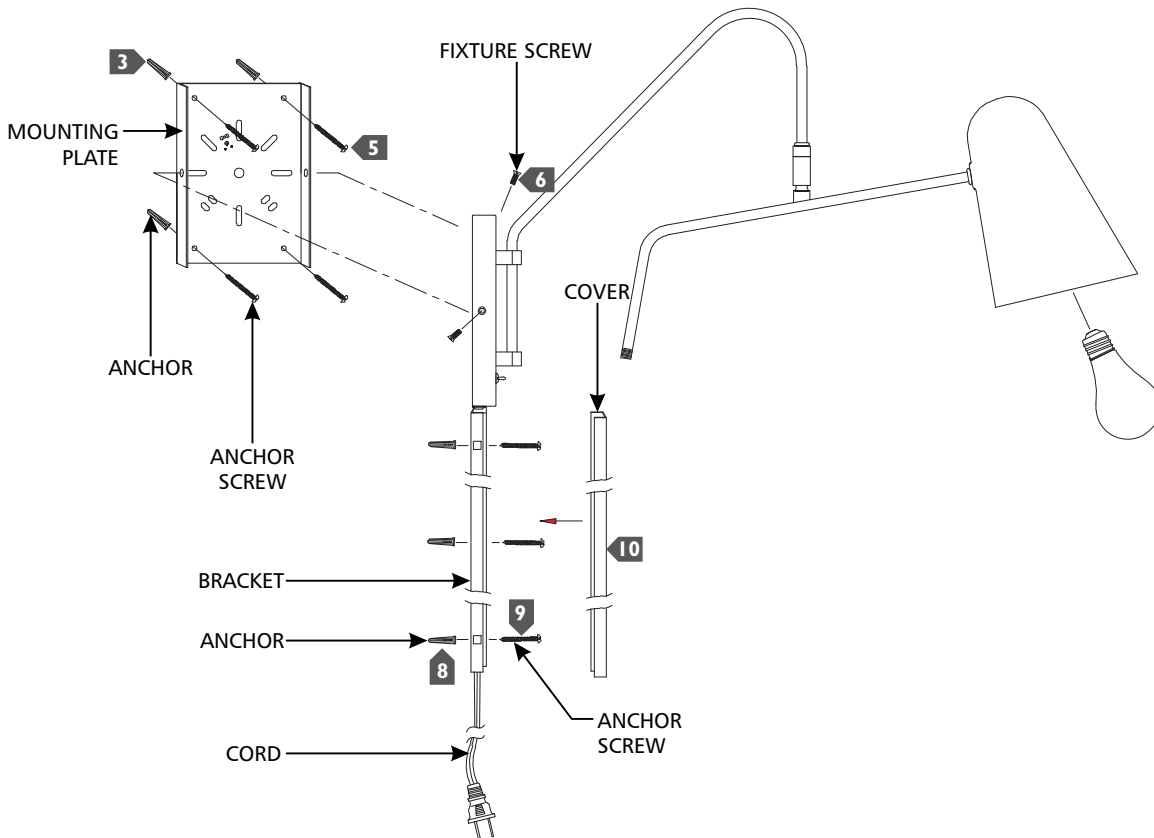
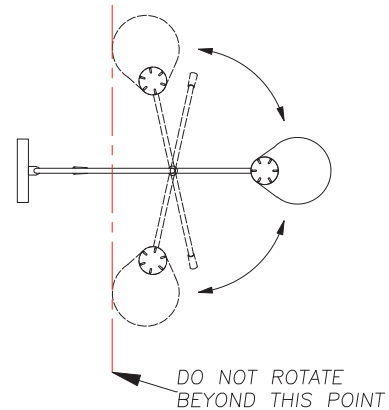


FIGURE 1

DO NOT ROTATE
BEYOND THIS POINT

- 1 Temporarily install the mounting plate to the wall.
- 2 Mark the anchor hole locations through the mounting plate, then remove the mounting plate.
- 3 Drill appropriate sized holes and install the anchors.
- 4 Secure the mounting plate to the wall.
- 5 Screw the anchor screws into the anchors.
- 6 Mount the fixture onto the mounting plate and secure it in place with the fixture screws.
- 7 Place the bracket against the wall and align with the fixture, then mark the anchor hole locations through the holes on the bracket.
- 8 Drill appropriate sized holes and install the anchors.
- 9 Secure the bracket to the wall by placing the bracket over the anchors, then screwing the anchor screws into the anchors.
- 10 Place the cord in the bracket, then install the cover to the bracket.
- 11 Install the handle by screwing it onto the arm.
- 12 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 13 Adjust the arm by moving the handle left or right until the desired position is reached. **Make sure to not rotate the arms past the indicated point (see figure 1).**