JAMIE YOUNG Cº

Orion Chandelier

5ORIO-CHMM

PLEASE FOLLOW THE INSTRUCTIONS LISTED BELOW:

CAUTION: DO NOT PLUG INTO WALL OUTLET BEFORE ASSEMBLY.
UNPLUG WHEN REPLACING THE LAMP BULB.

To Assemble:

1. Carefully unpack carton and place all parts on a soft, smooth surface. Inventory all parts.
2. Attach Crossbar (J) to outlet box using two outlet box screws (I).
3. Tread Stem (C) into the coupling of the Fixture (B).
4. Determine desired hanging height and use a pair of proper chain pliers to remove and discard excess Chain (D).
5. Open one end of Quick Link (E) and attach to Fixture Loop (C) and close quick link (E). Slip Lock Collar (G) and Canopy (H) over Chain (D) and allow them to rest on fixture body.Open other end of Quick Link (E) and attach to ceiling loop (F) and close Quick Link (E).
6. Carefully lace fixture's wires through chain, loop and all thread assembly.
7. Wrap the safety cable from fixture around a reinforced structural ceiling joist and secure the cable with the clamp and set screws.
8. Tie the ground wires from fixture and from outlet box to the ground screw on the mounting strip. Connect the wire without writing on it (with raised ribs) from the fixture to the white wire (neutral wire) from the supply circuit. Connect the wire with writing on it from the fixture to the black wire (live wire) from the supply circuit.
9. Raise Canopy (H) onto Ceiling Loop (F) and secure with Lock Collar (G).
10. Starting from the bottom and top, carefully insert Screw (K) through bracket of the Fixture (B), then place Washer (M), Glass (L) and Washer (M) to bracket of Fixture (B) with Finial (N) as shown. Do not overtighten.
11. Insert Bulb (A) not included.

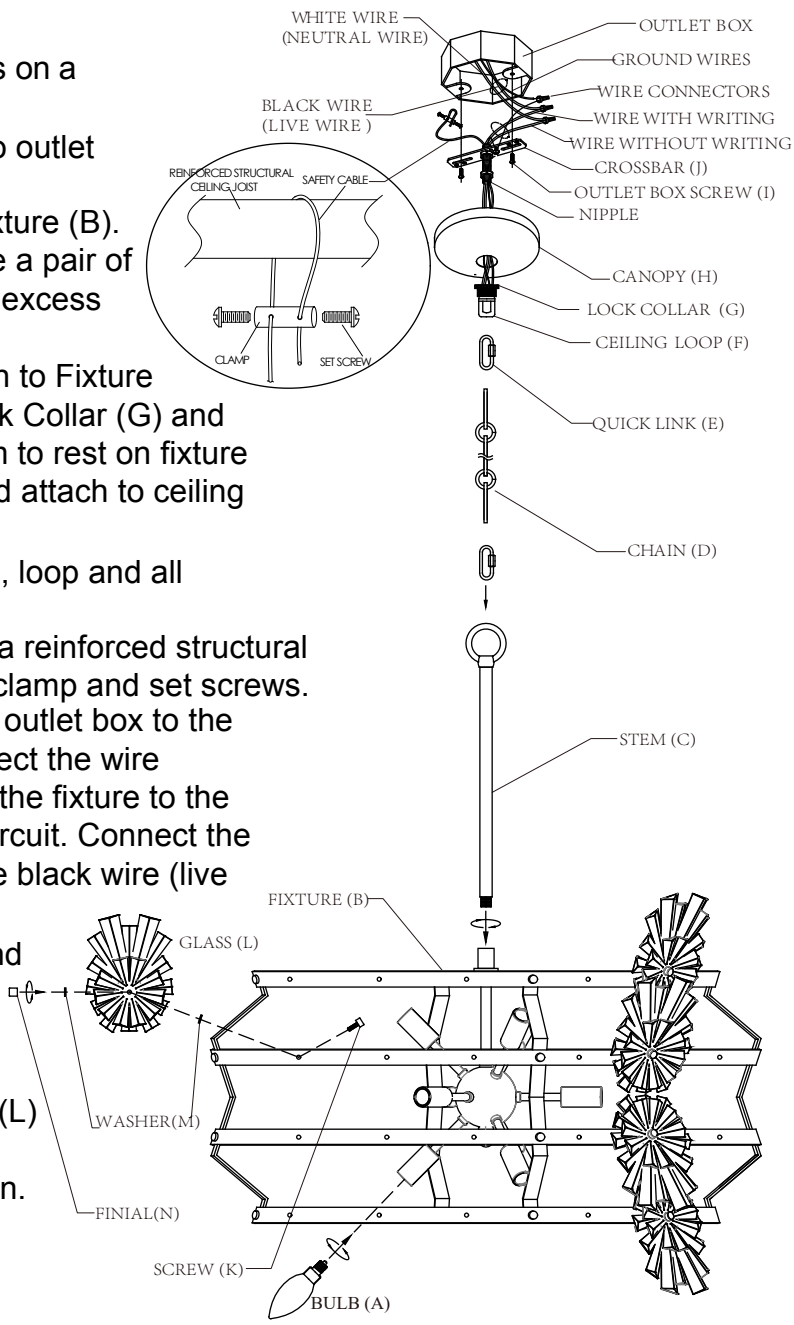

Care Instructions:

- Clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners.

Thank you for purchasing this chandelier !
www.jamieyoung.com