

Justice Design Group

Installation Instructions

Chandelier

For Model : FSN-9010-ETCH-BRSS

IMPORTANT

- . Justice Design recommends that a licensed electrician install this lighting fixture
- . Installation must comply with all building, safety, and electrical codes and requirements
- . Disconnect power to the junction box prior to installation
- . Do not reconnect power until this fixture is properly installed
- . This fixture is designed to mount to a standard metal 4-0 octagonal junction box




Hardware Pack contains:

- A. (2) Mounting Screws
- B. (1) Canopy Lock Ring
- C. (3) Wire Nuts
- D. (1) Crossbar Assembly

Other parts included in the box:


- E. (1) Canopy
- F. (4) Stems
- G. (2) Small Glass
- H. (3) Big Glass

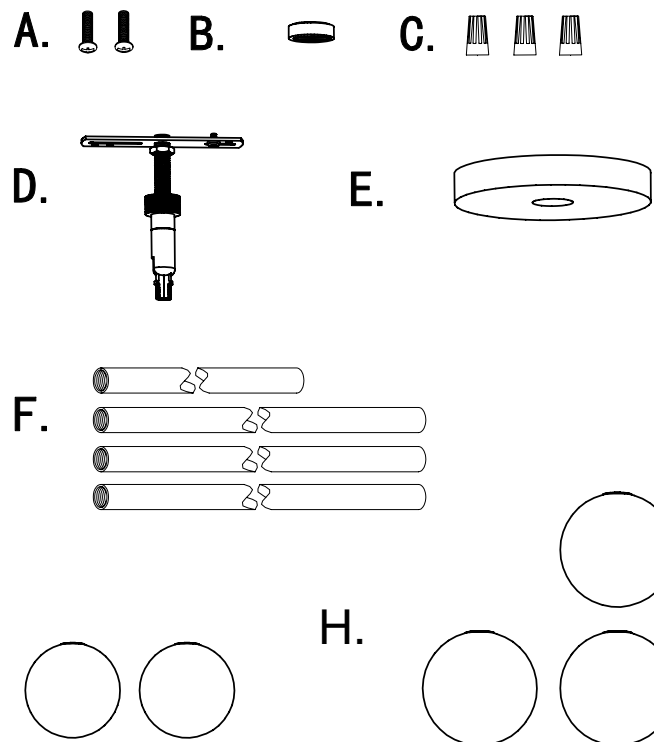

1

Attach the crossbar assembly (D) to junction box using mounting screws (A).

Note: The side of the crossbar assembly marked "GND" must face out. The junction box is not included.

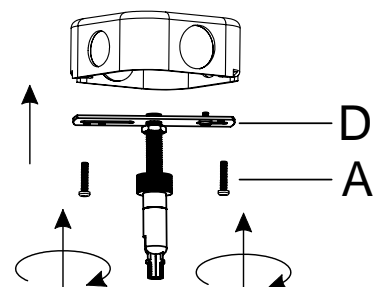

405 E Euclid Ave . Compton, CA 90222


Tel: (213) 437-0102 . Fax: (213) 437-0860 . E-mail: sales@JDG.COM Website: www.JDG.com

INS-FSN-9010-ETCH-BRSS

© 01/13/2026



2

1. This lamp includes 4PCS pipes, by measuring, determine the desired hanging height.
2. Feed the lamp holder's electrical wires through stems (F) and canopy (E), connect all the parts together until secure.
3. While holding the lamp body towards the ceiling, connect the electrical wires. Observe polarity: black to power, white to neutral, and bare copper wire to green ground. Connect fixture wires to supply wires using wire nuts (C).

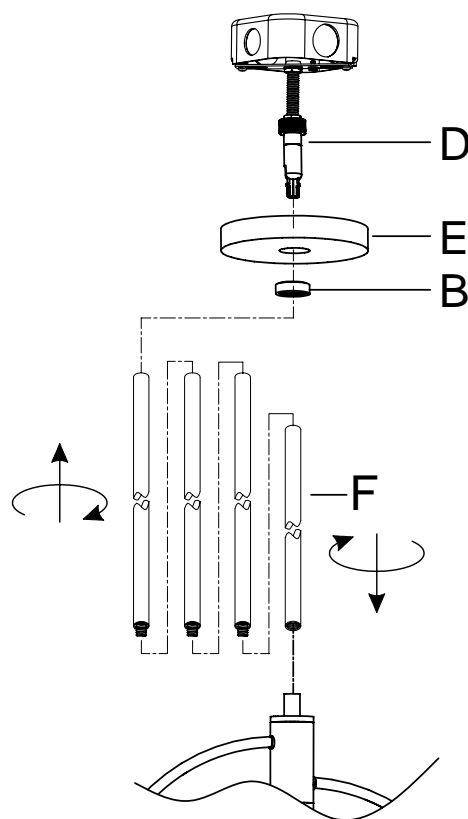

3

1. Tuck wires and wire nuts (C) into junction box. Attach canopy (E) to crossbar assembly (D) then lock it securely with the canopy lock ring (B).
2. NOTE: Install bulbs (Not included). Take care never to exceed maximum wattage.
3. Install the Small glass (G) for small cups; big glass (H) for big cups.

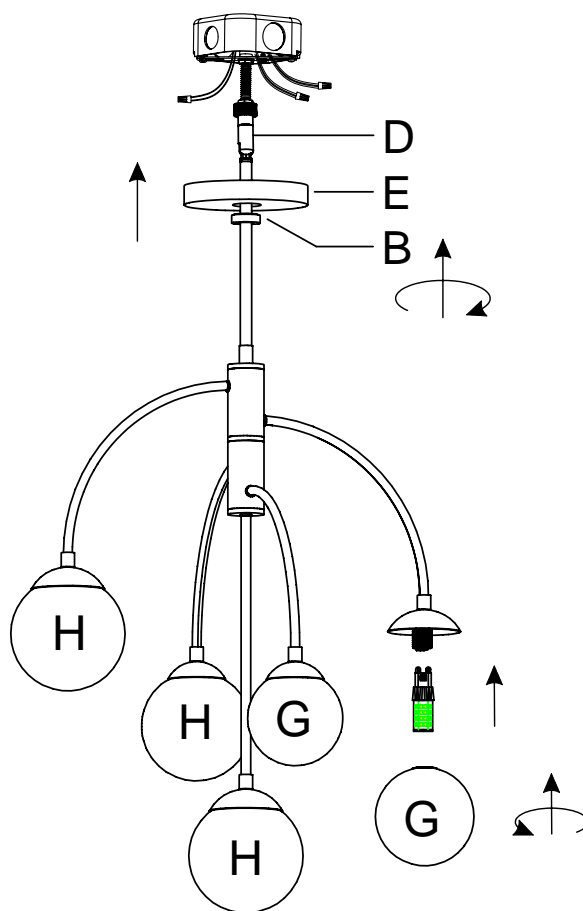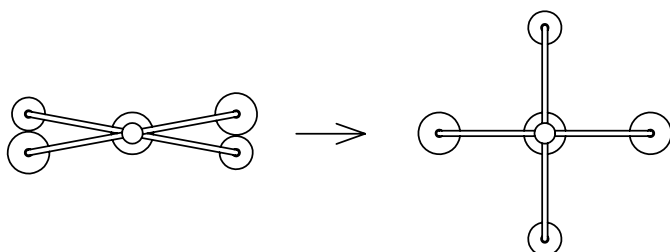

**Your installation is now complete.
Return power to the junction box
and test the fixture.**