


SYRIE SMALL, MEDIUM & X-LARGE VANITIES

EV1021; EV1022; EV1024

General Product Information



WARRANTY



FCC STATEMENT

Tools Required



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

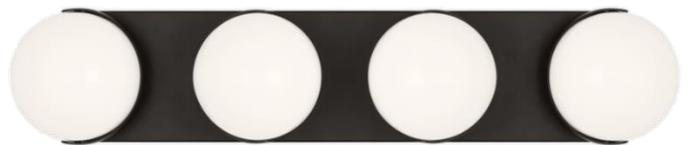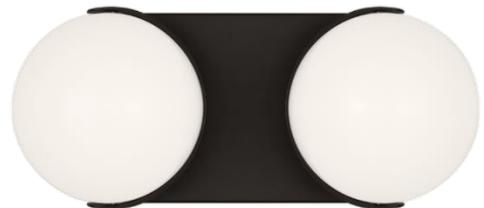

FIXTURE PARTS

- A. Junction Box
- B. Hot Power Line Wire
- C. Neutral Power Line Wire
- D. Ground Wire
- E. Hot Fixture Wire
- F. Neutral Fixture Wire
- G. Fixture Ground Wire
- H. Wire Nuts
- I. Mounting Plate
- J. Mounting Studs
- K. Fixture Base
- L. Fixture Screws
- M. Shade

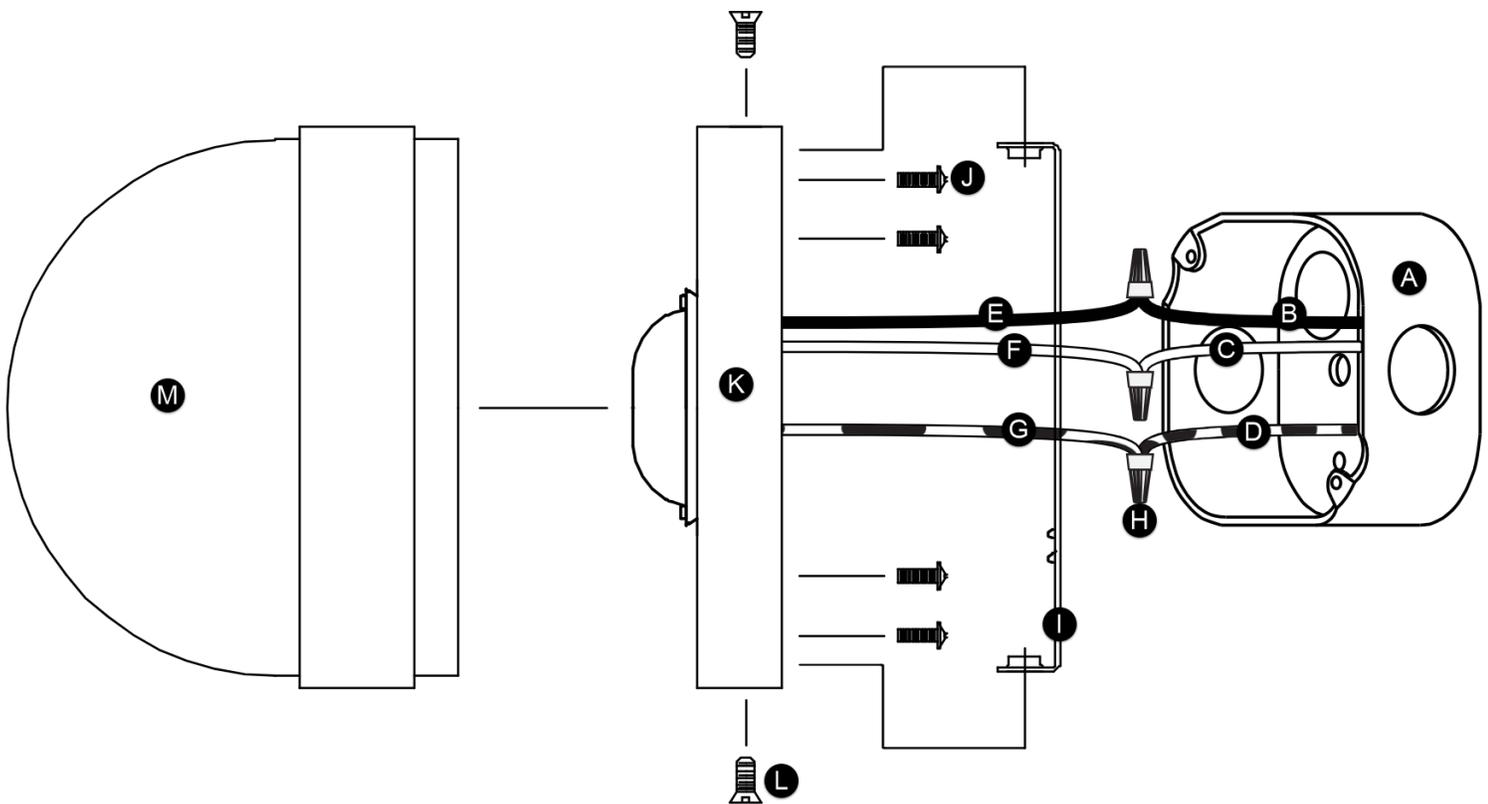

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box.
2. Install the shades onto the fixture using the shade screws/mounting studs (J).

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black or round and smooth, depending on the fixture) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture input wire (white or square and rigid, depending on the fixture) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck the driver and all the wires into the junction box, if the fixture requires it.

III. Installing the Fixture

1. Mount the fixture onto the mounting plate and secure it in place using the mounting studs and the fixture screws.