

INSTALLATION INSTRUCTION

LENMORE

WS-BATH-10-24

Huxe

CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by Lumens. Substitution of parts or accessories not designated for use with this product by Lumens could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

MAINTENANCE NOTE: Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.

MISE EN GARDE: Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.

- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licencié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

ATTENTION: Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits dweLED. Remplacer des pièces ou accessoires non conçus pour ce produit dweLED pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

NOTE D'ENTRETIEN: Les conditions côtières peut causer une accumulation de minéraux et de résidus sur le luminaire. Nous recommandons aux clients qui résident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.



Wire Connector
Qty: 4pcs



Mounting Screw
Qty: 1 Extra



Assembly Screw
Qty: 1 Extra

Fig.1


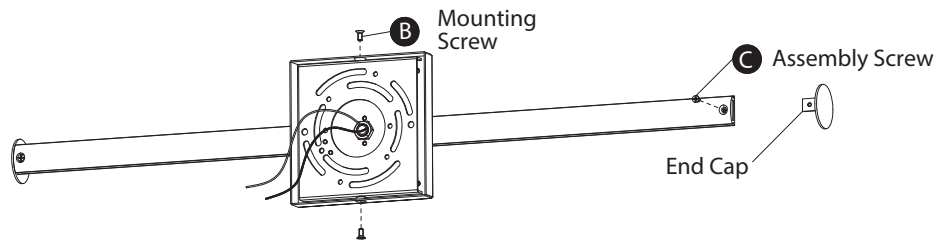


Fig.2

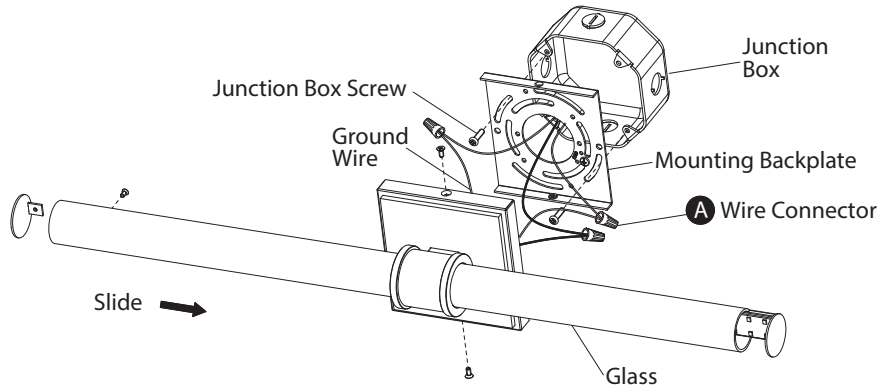

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE (Fig. 1&Fig. 2)

3. Remove the Assembly screw(C) and end cap on one side.
4. Slide the glass into the lamp body. Secure the End cap using Assembly screw(C).
5. Remove the mounting screw (B) from the fixture.
6. Secure the mounting plate to the junction box using the screws provided with the junction box.

Note: (i)Using any other non-original-manufacturer provided junction box screw may result in safety issue.

(ii) The side of the mounting plate marked "GND" must face out.


CONNECTING THE WIRES (Fig. 3)


7. Connect the input wires to junction box wires as shown (Fig. 3). Make sure that all wire connectors (A) are secure. If your outlet box has a GND or bare copper ground wire, connect the ground wire to it. Otherwise, connect the fixture's ground wire directly to the backplate using the GND screw provided. After wires are connected, tuck them carefully inside the junction box.

COMPLETING THE INSTALLATION

8. Secure the fixture to the mounting back plate using the mounting screw (B).

Fig.3 Wiring

	Fixture Wires	House Wires
	Black or Smooth	Black (Hot)
	White or Ribbed	White (Neutral)
	Fixture Wires	House Wires
	Bare wire (Ground)	Green or Bare Copper (Ground)

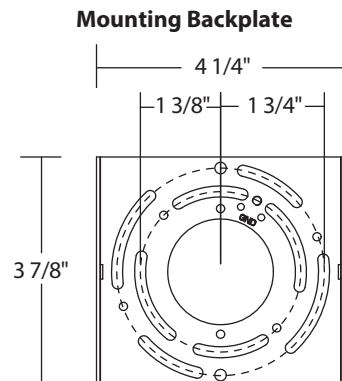

本页仅用于版本控制，请勿印刷！
Revision control only, please don't print!

序号 REV NO.	变更说明 REVISION NTOE	变更人 CHANGED BY	变更日期 REV DATE
1			
2			
3			
4			
5			



规格：80 克进口书写纸 A4，双面印刷，短边对折两下
Specifications: 80g imported writing paper A4, double-sided printing, short side folded twice

图号：WS1024-11 A
DRAWING NO.

设计：杨嘉豪 11/10/2023
DESIGNED BY

审核：[Signature] 11/13/2023
CHECKED BY

标准化：[Signature] 11/13/2023
STANDARDIZED BY

批准：[Signature] 11/13/2023
APPROVED BY