INSTALLATION INSTRUCTION

**KASSON**

WS-BATH-12-21

Huxe

**CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.**

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

**WARNING:** All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by Lumens. Substitution of parts or accessories not designated for use with this product by Lumens could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

**MAINTENANCE NOTE:** Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.


**MISE EN GARDE:** Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.

- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licensié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

**ATTENTION:** Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits Lumens. Remplacer des pièces ou accessoires non conçus pour ce produit Lumens pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

**NOTE D'ENTRETIEN:** Les conditions côtières peut causer une accumulation de minéraux et de résidue sur le luminaire. Nous recommendons aux clients qui resident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.

**HARDWARE**

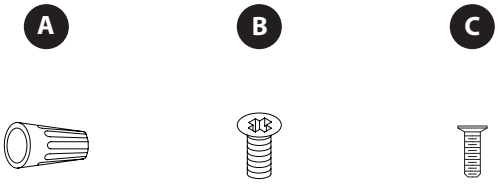



| A | B | C |
|---|---|---|
| Wire Connector<br>Qty: 4 pcs | Mounting Screw<br>Qty: 1 Extra | Fixture Screw<br>Qty: 1 Extra |

INSTALLATION INSTRUCTION
**KASSON**
WS-BATH-12-21

Huxe

**FIG. 1**

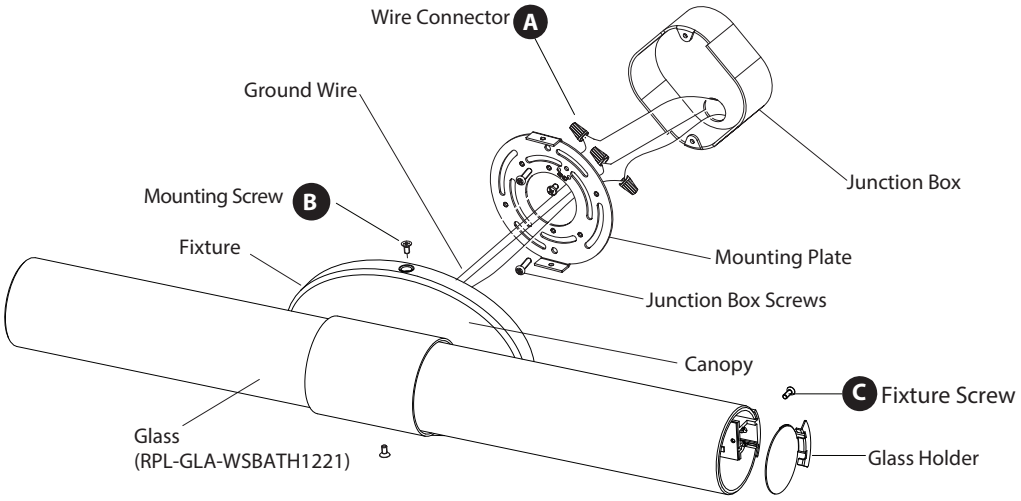



**PREPARATION**

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for

**MOUNTING THE FIXTURE (Fig. 1)**

3. Remove the mounting screw (B) from the fixture, take down the mounting plate.
4. Secure the mounting plate to the junction box using the screws provided with the junction box.
   **Note:** (i) using any other non-original-manufacturer provided junction box screw may result in safety issue;
   (ii) The side of the mounting plate marked "GND" must face out.
5. Slide the glass into the fixture along the track. Secure it with glass holders using fixture screws (C).
6. Connect the fixture's input wires to the junction box wires (Fig. 2) using wire connectors (A) provided. Ensure all wire connectors are secure. Connect the fixture's ground wire to the ground in the junction box; this will be either a green wire or a bare copper wire. After fixture is wired to house wires, tuck wires carefully inside the junction box.
7. Place the fixture over the mounting plate and secure with mounting screws(B).

**Fig. 2 Wiring**



| Fixture Wires | House Wires |
|---|---|
| Black or Smooth | Black (Hot) |
| **Fixture Wires** | **House Wires** |
| White or Ribbed | White (Neutral) |
| **Fixture Wires** | **House Wires** |
| Bare wire (Ground) | Green or Bare Copper (Ground) |

**Mounting Ring Dimensions**

