

## ASSEMBLY INSTRUCTIONS

### ITEM DESCRIPTION:

ITEM NO.: GJDLCO1

NAME: TIFFANY CHANDELIER

MATERIAL TYPE: STEEL, GLASS

FINISH: ANTIQUE BRASS, SMOKE LUSTER

SOCKET TYPE: E12

SOCKET QTY: 8

BULB WATTAGE: 60W

VOLTAGE: 110-120V

ITEM NET WEIGHT: 71.5 LBS

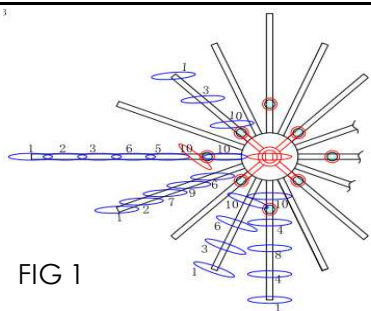


FIG 1

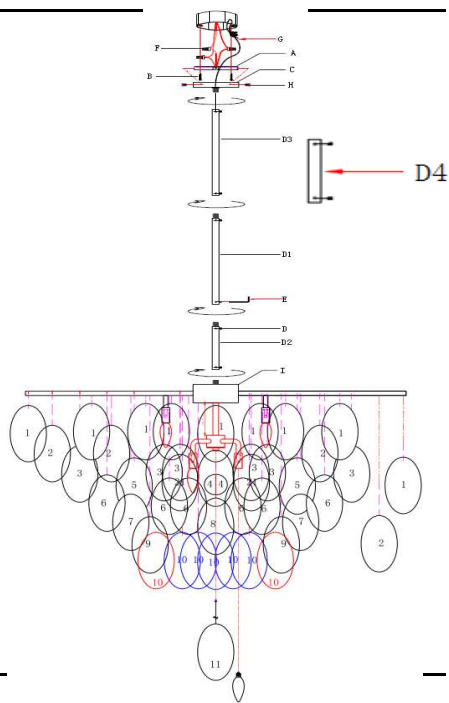


FIG 2

#### Glass panel-<sup>1</sup>

#1—16pcs (8 3/4") <sup>1</sup>	#7—4pcs (19 3/4") <sup>1</sup>
#2—6pcs (11 1/4") <sup>1</sup>	#8—2pcs (20 1/4") <sup>1</sup>
#3—10pcs (13 3/4") <sup>1</sup>	#9—4pcs (22 5/8") <sup>1</sup>
#4—4pcs (14 3/8") <sup>1</sup>	#10—14pcs (24 1/2") <sup>1</sup>
#5—2pcs (15 1/4") <sup>1</sup>	#11—1pcs (20 1/2") <sup>1</sup>
#6—10pcs (17 3/8") <sup>1</sup>	

### PARTS INCLUDED:

Mounting Plate (A)	Qty: 1 Pc	Main Body(I)	Qty: 1 Pc
Mounting Screws (B)	Qty: 2 Pcs	Aircraft Wire(G)	Qty: 1 Pc
Canopy (C)	Qty: 1 Pc	Bulb (not included)(J)	Qty: 8 Pcs
Rod(D1,D2,D3,D4)	Qty: 4 Pcs		

### HARDWARE INCLUDED:

Canopy Screws(H)	Qty: 4 Pcs	Plastic Wire Connector (F)	Qty : 3 Pcs
Hexangular Screw (K)	Qty: 5 Pcs	Allen Wrench( E)	Qty : 1 Pc

### TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



### TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Connect lamp body(I) and canopy(C) with rods(D1,D2,D3,D4) when you connect the rods, loosen the small hex screws(E) first then tighten with allen wrench(E), after all rods are connected. Be sure all the hex screws are tight enough.
5. Remove mounting plate(A) from the canopy(C) by unscrewing the collar.
6. Carefully inspect the pendant's fixture wires. **Neutral fixture wire: White ; Hot fixture wire: Black ; Ground wire: Green**
7. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire connector(F) and wrap the connection with electrical tape.
8. Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a wire connector(F) and wrap the connection with electrical tape.
9. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire connector(F) and wrap the connection with electrical tape. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, OR SAFETY WILL BE COMPROMISED.**
10. Pass the aircraft wire(G) through the mounting plate(A), attach the aircraft wire(G) on the junction box, then secure the aircraft wire(G) with screws which are included. **This fixture is 32.5KG(71.5LBS), the aircraft wire(G) installation is required for safety.**
11. Attach the mounting plate(A) to the ceiling outlet box by using the enclosed mounting screw(B) and tighten screws with a screwdriver.
12. Push the canopy(C) up over the mounting plate(A) until it is flush with the ceiling and fix the canopy by enclosed canopy screws(H). And tighten screws with a screwdriver. Be sure all the screws were tight enough.
13. Insert 8 type B 60W bulb(or CFL16W/LED 13W bulb, not included) into the sockets. **DO NOT EXCEED SPECIFIED WATTAGE OF PENDANT.**
14. Glassified the glasses from numbers showed on the package and remove all glasses from package carefully, and hang it over on the arm as per FIG 1 & FIG 2 showed.

### CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS