


## RHYTHM

Standard White



CS10 - Center Canopy

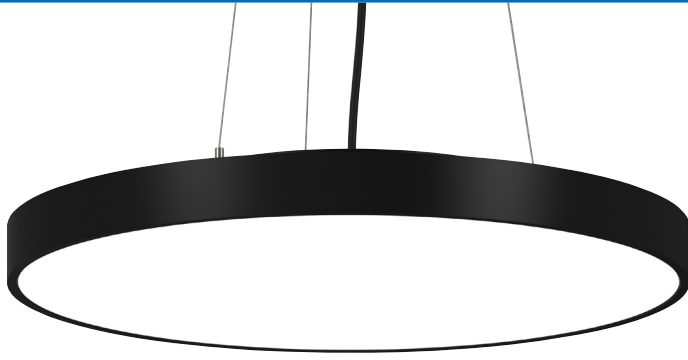

S - Surface Mount

## FEATURES

- 2.0" profile
- Back lit illumination
- Selectable CCT: 3000K/3500K/4000K

## HOUSING

- Housing is offered with two finishes black and white.

## MOUNTING

- Fixture can be mounted on any wall or ceiling with 4" octagonal J-box.

## ELECTRICAL INFO

- 120-277Vac, 50/60Hz input
- Up to: 26W - 18" and 50W - 24" Direct only
- Up to: 43W - 18" and 73W - 24" Direct/Indirect
- Down-light and up-light - single dimming control
- 0-10V Dimming to 1%

## LISTING

- IP40 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

## LED INFO

- LumiLED MP Series LED:
- CRI: >90, SDCM: 3-step MacAdam Ellipse, Lumen Maintenance:  $L_{70} > 50,000$  hrs

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

## ORDERING CODE

SERIES	RHY	rhythm
TYPE	RD	round
SIZE	18 24	D 18" D 24"
DELIVERED LUMENS	1 2	(reference lumen and wattage table below)
CCT	3CCT	selectable CCT: 3000K/3500K/4000K
CRI	90	90 CRI
LIGHT OUTPUT	D DI-30K DI-35K DI-40K	direct only indirect 3000K indirect 3500K indirect 4000K
MOUNTING	S CS10	surface mount center canopy with AC suspension and cord, 10ft
HOUSING COLOR	BK WH	black white
VOLTAGE	UNV-DIM10	120V-277V integrated driver, flicker free 0-10V dimming to 1%

## ORDERING CODE

Follow the steps to specify your fixture, example:

**RHY - RD - 24 - 2 - 3CCT - 90 - DI-30K - CS10 - BK - UNV-DIM10**

## ROUND


18" DIRECT LUMEN				
OUTPUT	3000K	3500K	4000K	WATTAGE
1	2016	2097	2117	20
2	2765	2876	2903	28

24" DIRECT LUMEN				
OUTPUT	3000K	3500K	4000K	WATTAGE
1	4253	4423	4466	42
2	5592	5816	5872	58


INDIRECT (3000K)				
SIZE	3000K	3500K	4000K	WATTAGE
18"	1318	1370	1384	14
24"	1754	1824	1842	22

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			


MOUNTING OPTIONS

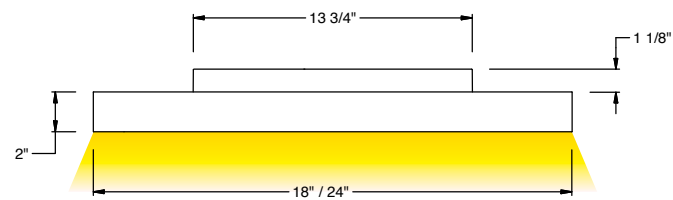


Direct - Surface Mount

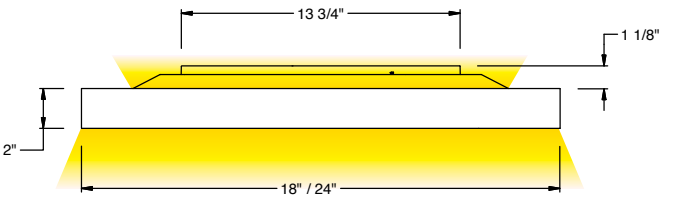

Direct / Indirect - Surface Mount

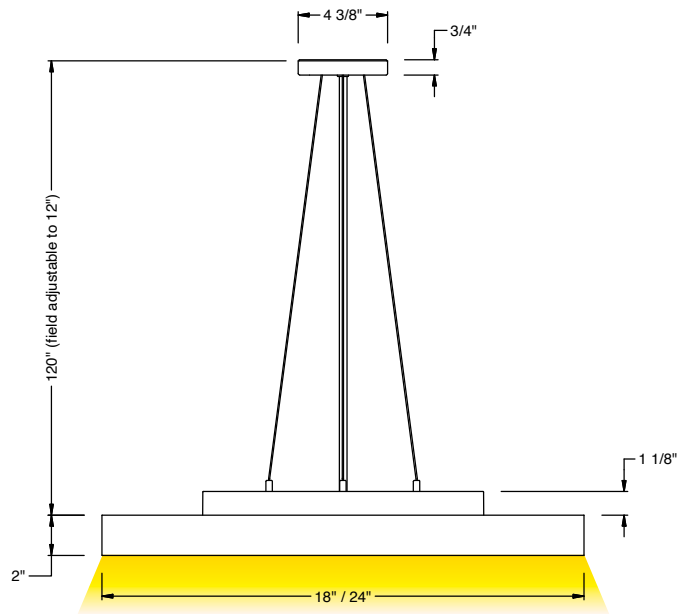


Direct - Center Canopy Aircraft Suspension

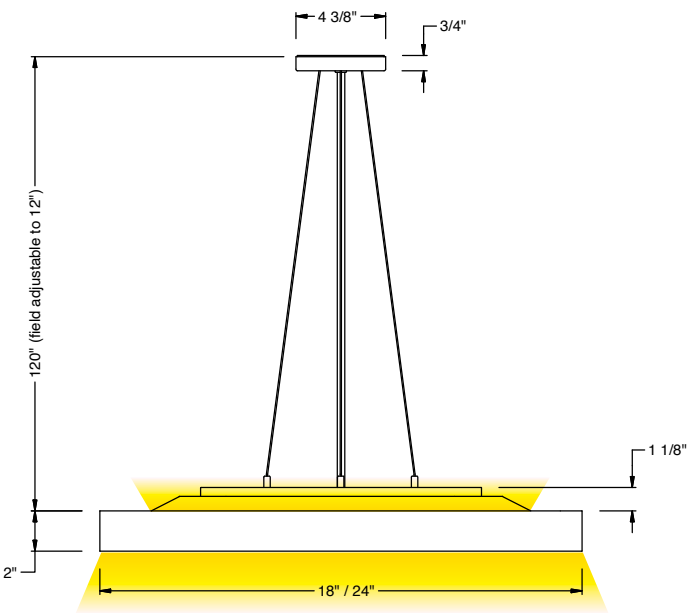


Direct / Indirect - Center Canopy Aircraft Suspension

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

MOUNTING OPTIONS

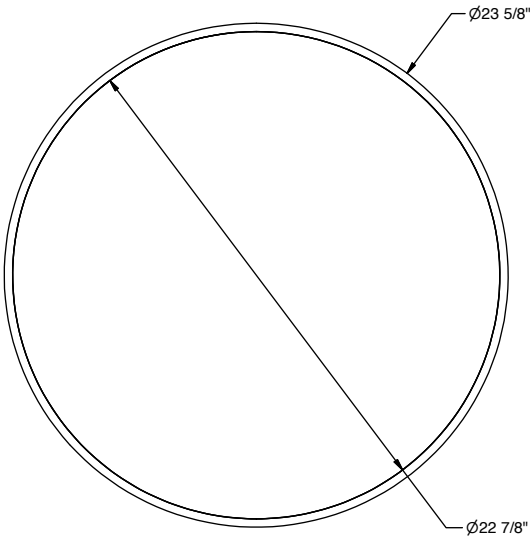

RHY-RD 24

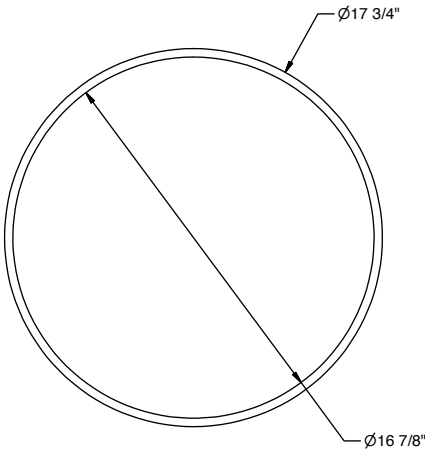

RHY-RD 18