




Measurements

Surface

M


A: 277/10.91" A1: 190/7.48" F: ø1320/52"



Recessed

M

A: 217/8.54" A1R: 120/4.72"

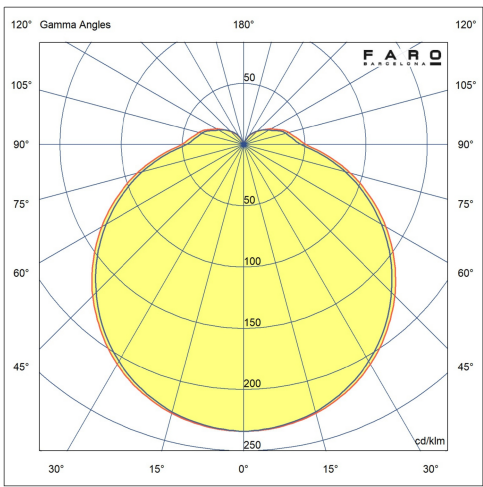

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	18
Energy class light source	F
Light source	SMD LED
Lifespan	50.000h
Luminous Flux (lm)	806
Color temperature (K)	2700/ 3000/ 4000K
Opening angle degrees	130
Light orientation	Direct
CRI	80
Control System	TRIAC
Structure material	Steel
Diffuser material	Glass
Blade material (fan blades)	ABS
Structure finish	Matt White
RAL/Pantone structure	RAL 9016
Diffuser finish	Opal
Blade finish	Matt White
Motor type	DC
Fan power (W)	5-7-9-13-19-28
RPM	90-115-135-158-185-210
Airflow (m³/min)	80-102-125-143-165-177
Airflow (CFM)	2877-3662-4485-5118-5924-6318
Sound intensity (dBA)	37-37-38-40-43-54
Number of blades	3
Maximum tilt (°)	12
Type of control included	Remote control with timer
Fan programming hours	1-4-8h
Rod diameter	26
Optional rod model	Universal 26mm



Installation instructions



Energy label



Photometric



Related accessories



White wall controller for DC fan with dimmable light

Reference	33987
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	ABS + Glass



Black wall controller for DC fan with dimmable light

Reference	33988
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	ABS + Glass



Wall controller white rf applique 6 speeds

Reference	34306
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	ABS



Wall controller black rf applique 6 speeds

Reference	34307
Voltage (V)	100V-240V
Hertz	50/60Hz
IP	20
Structure material	ABS



