GENERATION LIGHTING

Wall

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

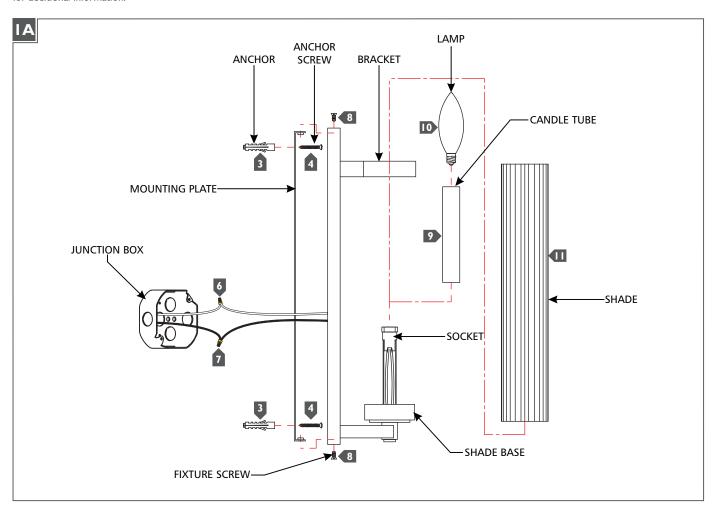

- Temporarily install the mounting plate to the junction box.
- 2 Mark the anchor holes locations through the holes on the mounting plate. Remove the mounting plate.
- 3 Drill appropriate sized holes at the marked locations and install the anchors.
- 4 Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
- 5 Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 6 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 7 Connect the black fixture wire to the hot power line wire with a wire nut.
- Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate, and secure it in place using the fixture screws.
- Install the candle tube by sliding it over the socket.
- Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- Install the shade by sliding it through the bracket and into the shade base.

SAVETHESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

www. generation lighting. com

© 2019 Generation Lighting All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.