

Loom 14 Flush

700FML0M

1.0

VISUAL COMFORT & Co.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is suitable for damp locations.

This product can be dimmed with a low voltage electronic dimmer.

This instruction shows a typical installation.

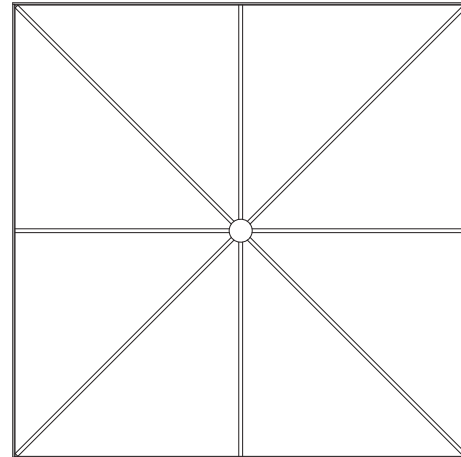


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

Install the Fixture

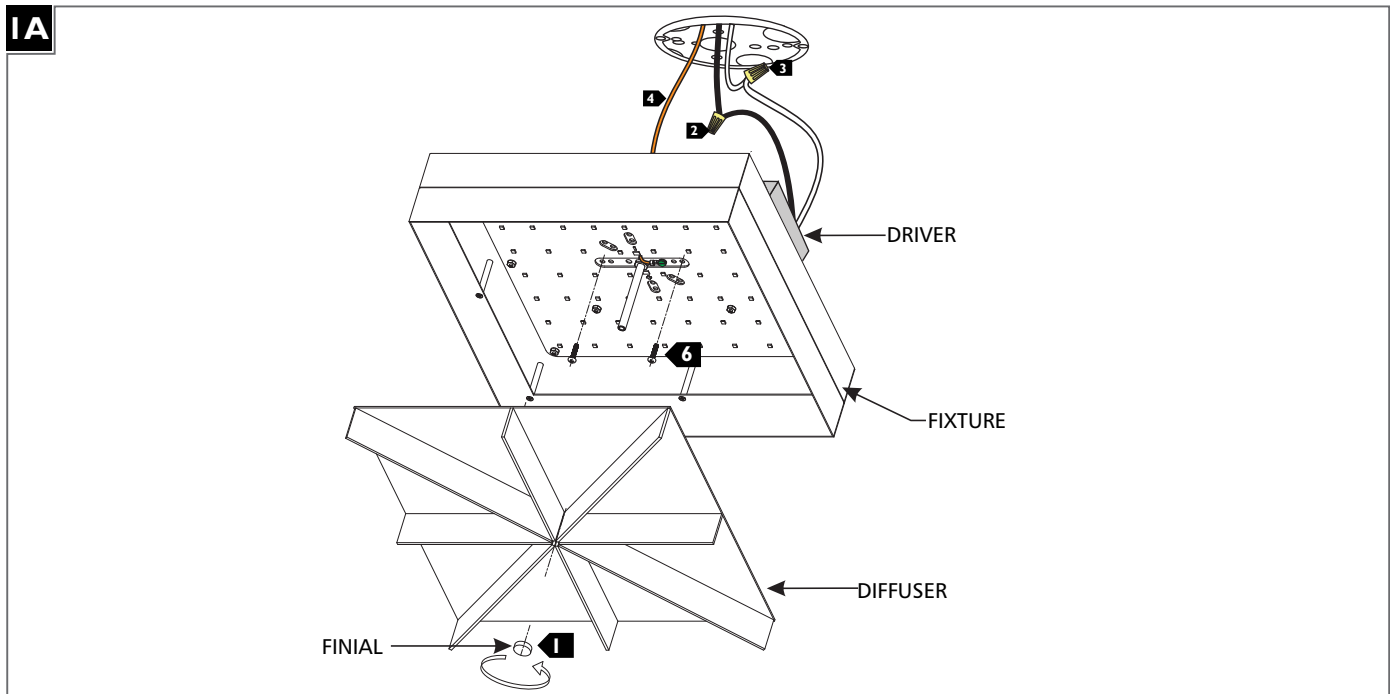

- 1** Remove the diffuser by unscrewing the finial located in the center of the fixture.
- 2** Connect the black driver wire to the hot power line wire with a wire nut.
- 3** Connect the white driver wire to the neutral power line wire with a wire nut.
- 4** Connect the fixture to suitable ground in accordance with local electrical codes.
- 5** Properly place the driver, wires and wire nut connections into the electrical box. (Optional: To assist with install, remove tape backing from driver and adhere to the electrical box or back of fixture housing.)
- 6** Install the fixture onto the electrical box with the two #8-32 screws provided.
- 7** Replace the diffuser onto the fixture. (Reversal of step 1.)

SAVE THESE INSTRUCTIONS!

VISUAL COMFORT & Co.

7400 Linder Ave, Skokie, IL 160077
800.969.3347

www.visualcomfort.com

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification