

INSTALLATION INSTRUCTIONS

Item# 12507-732 (New.10/06/2025)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig. 1)

3. Determine the desired hanging height and thread rods (G1, G2, G3 and G4) to all thread (J). Attach canopy (D) by screwing onto rod (G1).
4. Carefully pass the wires through each rod during assembly.
5. Attach mounting strap (A) to the junction box (not included) with mounting screws (E). The side of the mounting plate (A) with "GND" marked on it and two convex points must face out.

CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided.
7. Tuck the wire connectors neatly into the junction box.


COMPLETING THE INSTALLATION (Fig. 1)

8. Place canopy (D) over mounting strap (A) and secure with mounting screws (C).
9. Install (2) two medium base bulbs up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).
10. Place the glass (I) over the bulb according to the illustration Fig. 1.

Your installation is now complete. Return power to the junction box and test the fixture. Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set # 12507-732
-Circular Strap
-Ground Screw
-Mounting Screw *2

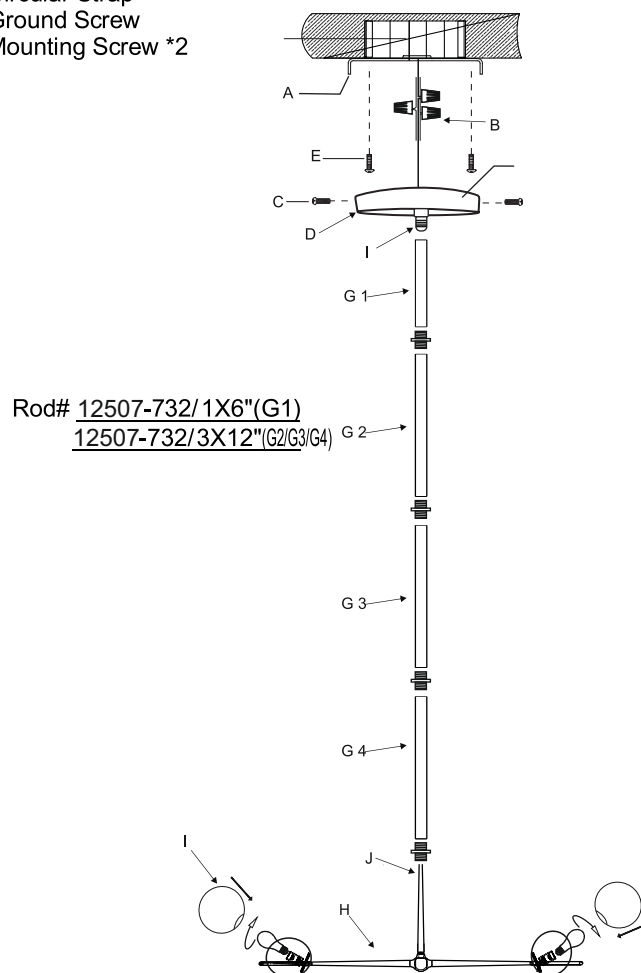

Rod# 12507-732/1X6"(G1)
12507-732/3X12"(G2/G3/G4)

Fig. 2

