



ONE DOT
INSTALLATION INSTRUCTIONS
WITHOUT WALL PLATE

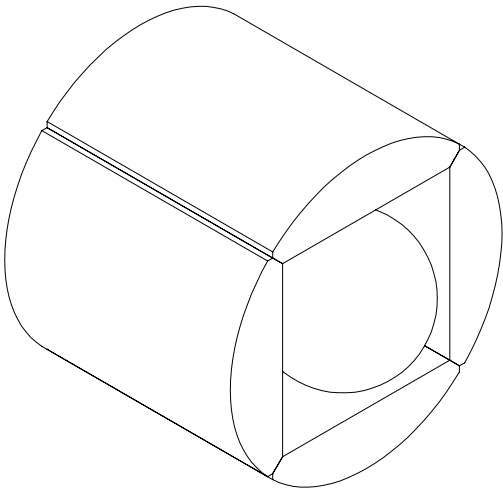

NOTE:

This installation option for the One Dot sconce requires that the jbox is prepared with a reducer ring (or mud-ring). Specify One Dot with Wall Plate for use with octagonal J-boxes without reducers.

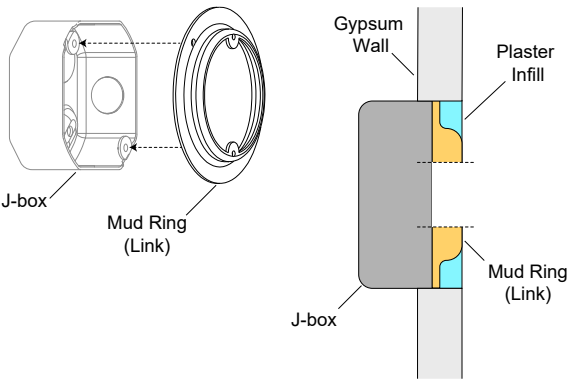

INSTALLATION OVERVIEW

PARTS + NOTES


- | | | |
|-------------------|---------------------------------|----------------------|
| A. Fixture | C. Tala "Sphere I" E12 LED bulb | E. Mounting Screw x2 |
| B. Mounting Plate | D. Wire Nut x3 | F. Hex Key |

CAUTION

Make sure building power is disconnected prior to handling wires. Installation should be done by a certified electrician.

NOTE:

This installation option for the One Dot sconce requires that the jbox is prepared with a reducer ring (or mud-ring). Specify One Dot with Wall Plate for use with octagonal J-boxes without reducers.

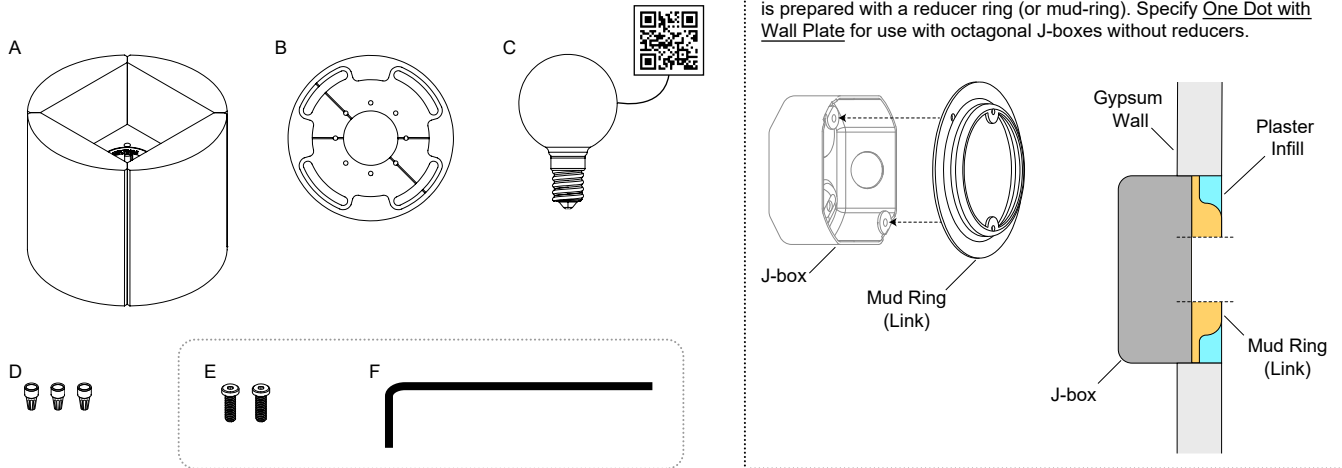


STEP 1

MOUNTING PLATE INSTALLATION


1.1 Mounting

Attach mounting plate (B) to mud ring using mounting screws (E) and hex key (F). Ensure alignment on mounting plate (see 1.2).

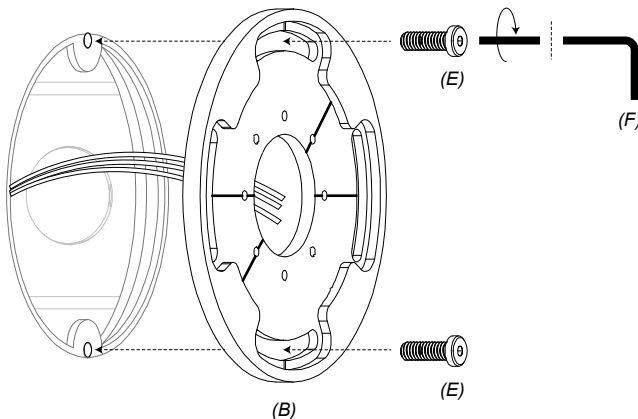

1.2 Leveling

Ensure that one of the two lines on the mounting plate is perfectly level before tightening screws.

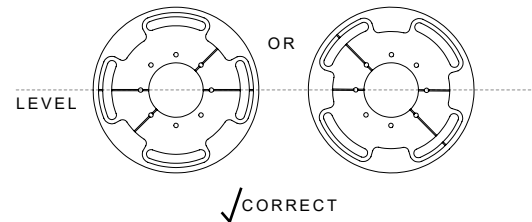


STEP 2**FIXTURE INSTALLATION****CAUTION**


Make sure building power is disconnected prior to handling wires. Installation should be done by a certified electrician.

2.1 Connect Wires


Connect white, black and green wires using wire nuts (D). Cap any extra wires in the j-box and tuck all wires through the central hole in the mounting plate.

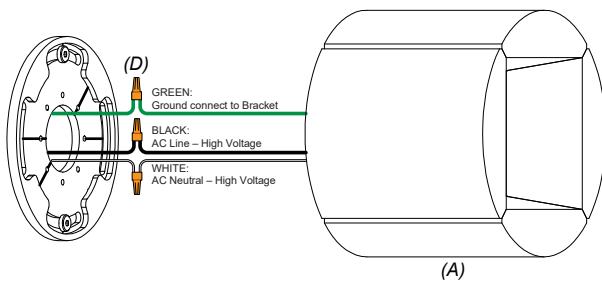**2.2 Place Over Mounting Plate**

Gently position the fixture (A) completely over the mounting plate, pushing any excess wire into the central hole within the plate. The fixture should be flush against the wall. Orient in a diamond or square position.

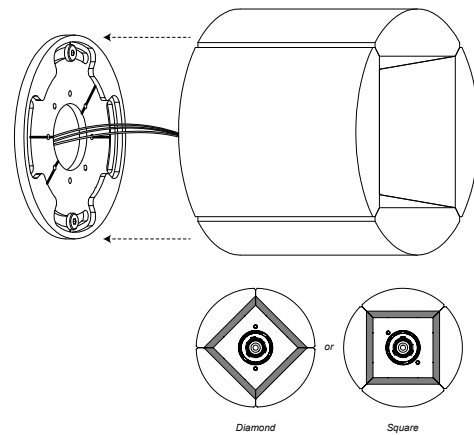**2.3 Secure Fixture**

Carefully insert hex key (F) into small holes near bulb socket so as not to scratch metal surface of fixture. Push the invisible screw inside the fixture into alignment with the holes in the mounting plate and tighten until fixture is firmly pressed against wall.

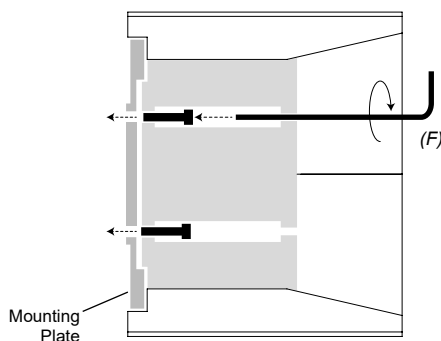

Section View

2.4 Install Bulb

Screw in Tala Sphere I bulb (C) provided with fixture.

