

Beatrix Chandelier

CC1646 | 1.0

GENERATION LIGHTING Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!

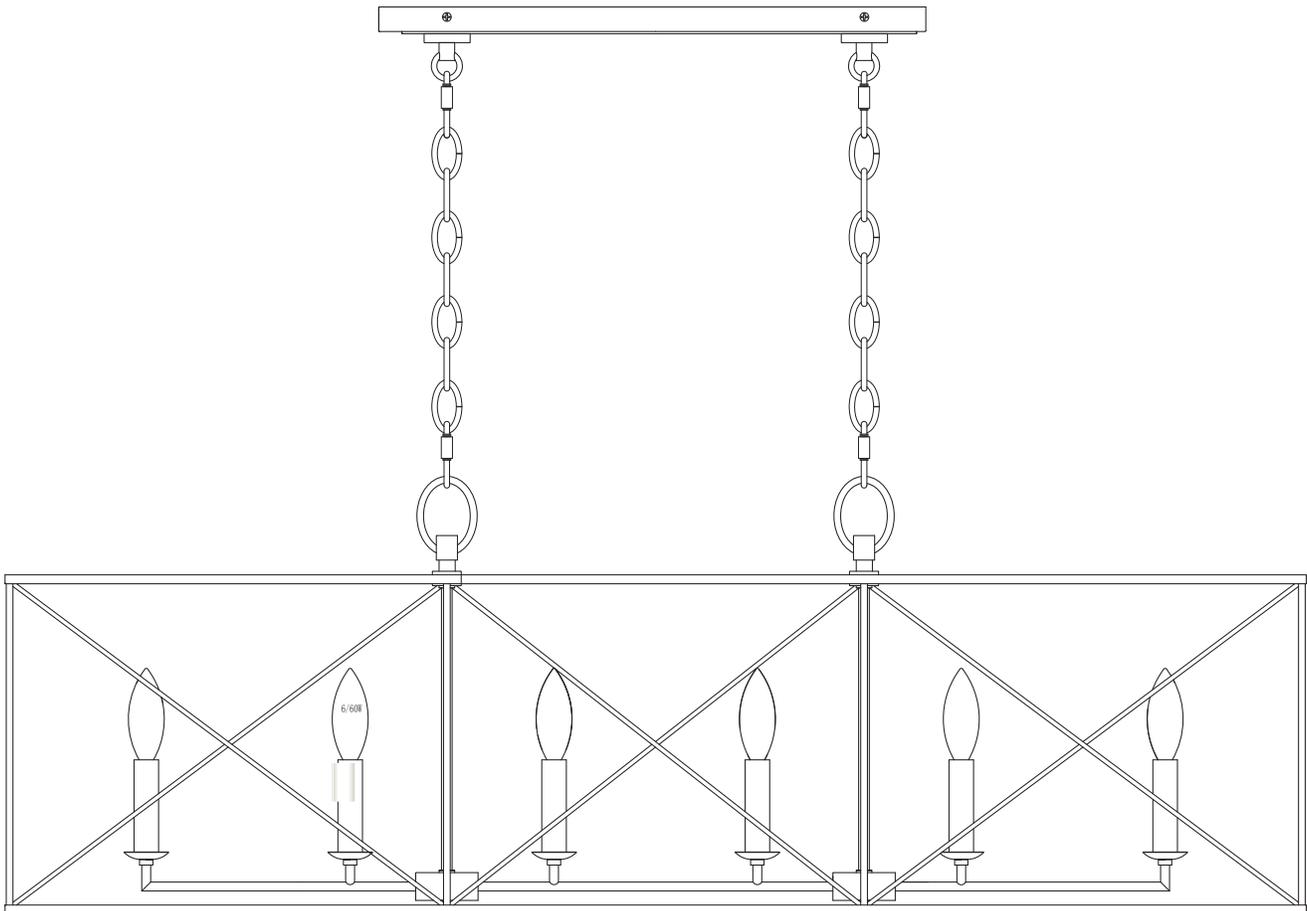

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

IA

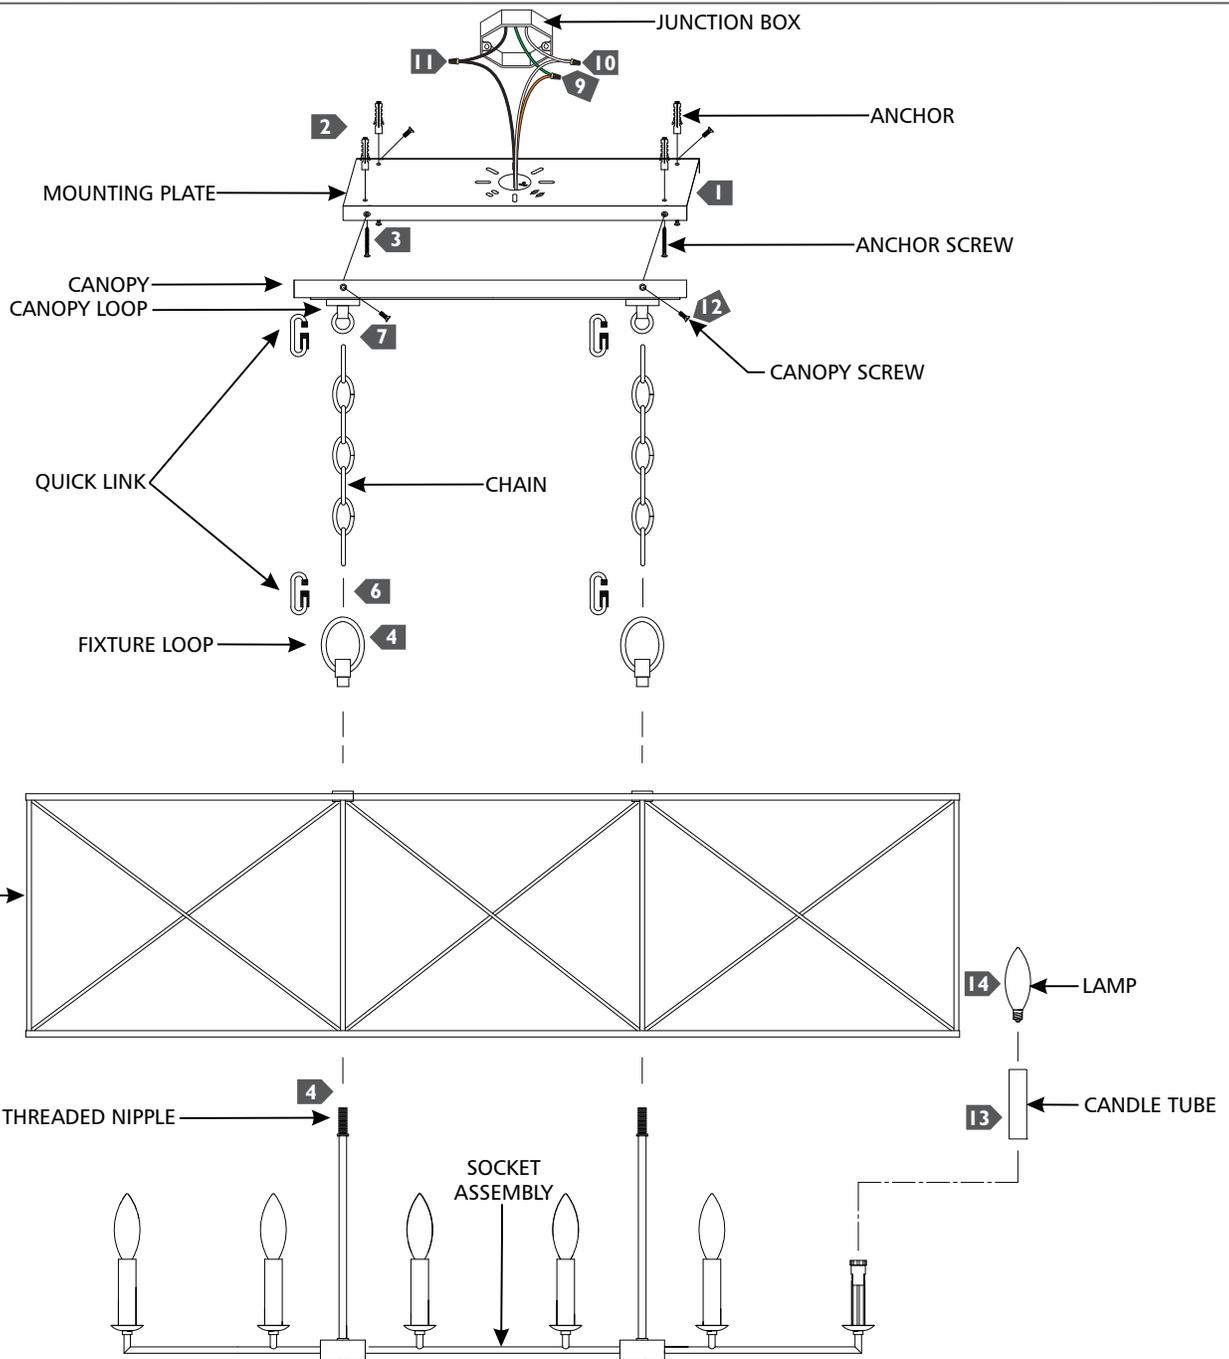

- 1** Place the mounting plate against the ceiling mounting location and mark the anchor locations through the holes on the mounting plate. Remove the mounting plate from the ceiling.
- 2** Drill appropriate sized holes at the marked locations and install the anchors.
- 3** Secure the mounting plate to the ceiling by screwing the anchor screws through the anchors.
- 4** Feed the fixture wires through frame, and fixture loop, then secure them together by screwing the fixture loop onto the socket assembly. (repeat this process for both sides.)
- 5** Determine the wanted height of the fixture and remove a portion of each chain from the bottom by opening a link with pliers.
- 6** Install a quick link to bottom end of each chain, then secure the link onto the fixture loop.
- 7** Install a quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 8** Weave the cord through the chain, canopy loop, and canopy, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place with the provided canopy screws.
- 13** Install the candle tubes by sliding one over each socket.
- 14** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.