





SAWYER FLUSH MOUNT

KSF1043

General Product Information




WARRANTY



FCC STATEMENT

Tools Required



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



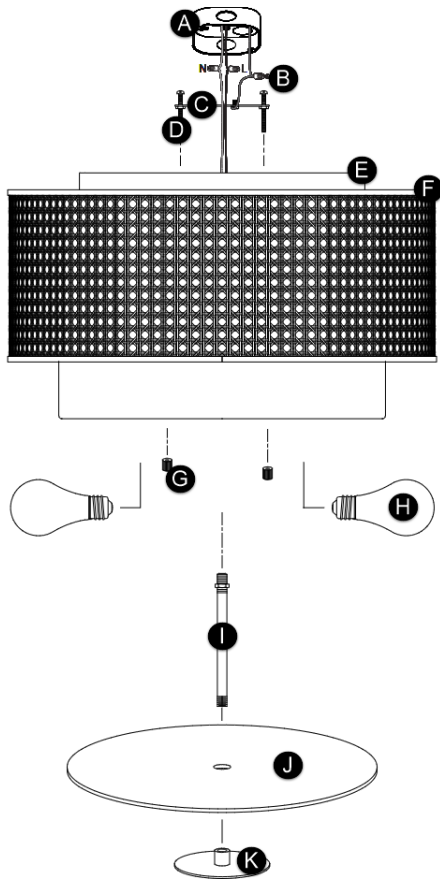

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Studs
- E. Inner Shade
- F. Outer Shade
- G. Cap Nuts
- H. Bulbs (Not Included)
- I. Threaded Rod
- J. Glass Disk
- K. Final

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box with the mounting screws (not pictured).

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. Carefully tuck all the wires and wire-nut connections in the junction box.

Installing the Fixture

1. Place the fixture base onto the mounting studs and secure it in place using the cap nuts.
2. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.
3. Install and secure the bottom stem into the socket assembly.
4. Place the glass disk against the glass tabs on the bottom rim of the outer shade and secure it in place by screwing the finial onto the bottom stem.