

## Phobos Wall

**700WSPHB21, 700WSPHB33****1.0**

# VISUAL COMFORT & Co.

MODERN COLLECTION

### GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

Dimmable with most LED compatible ELV, TRIAC and 0-10V dimmers.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Use minimum 90°C supply conductors.**

**SAVE THESE INSTRUCTIONS!**

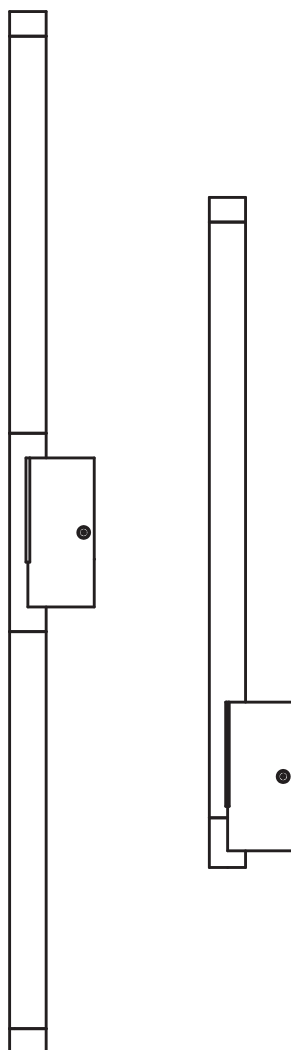**VISUAL COMFORT & Co.**


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

## Install the Fixture

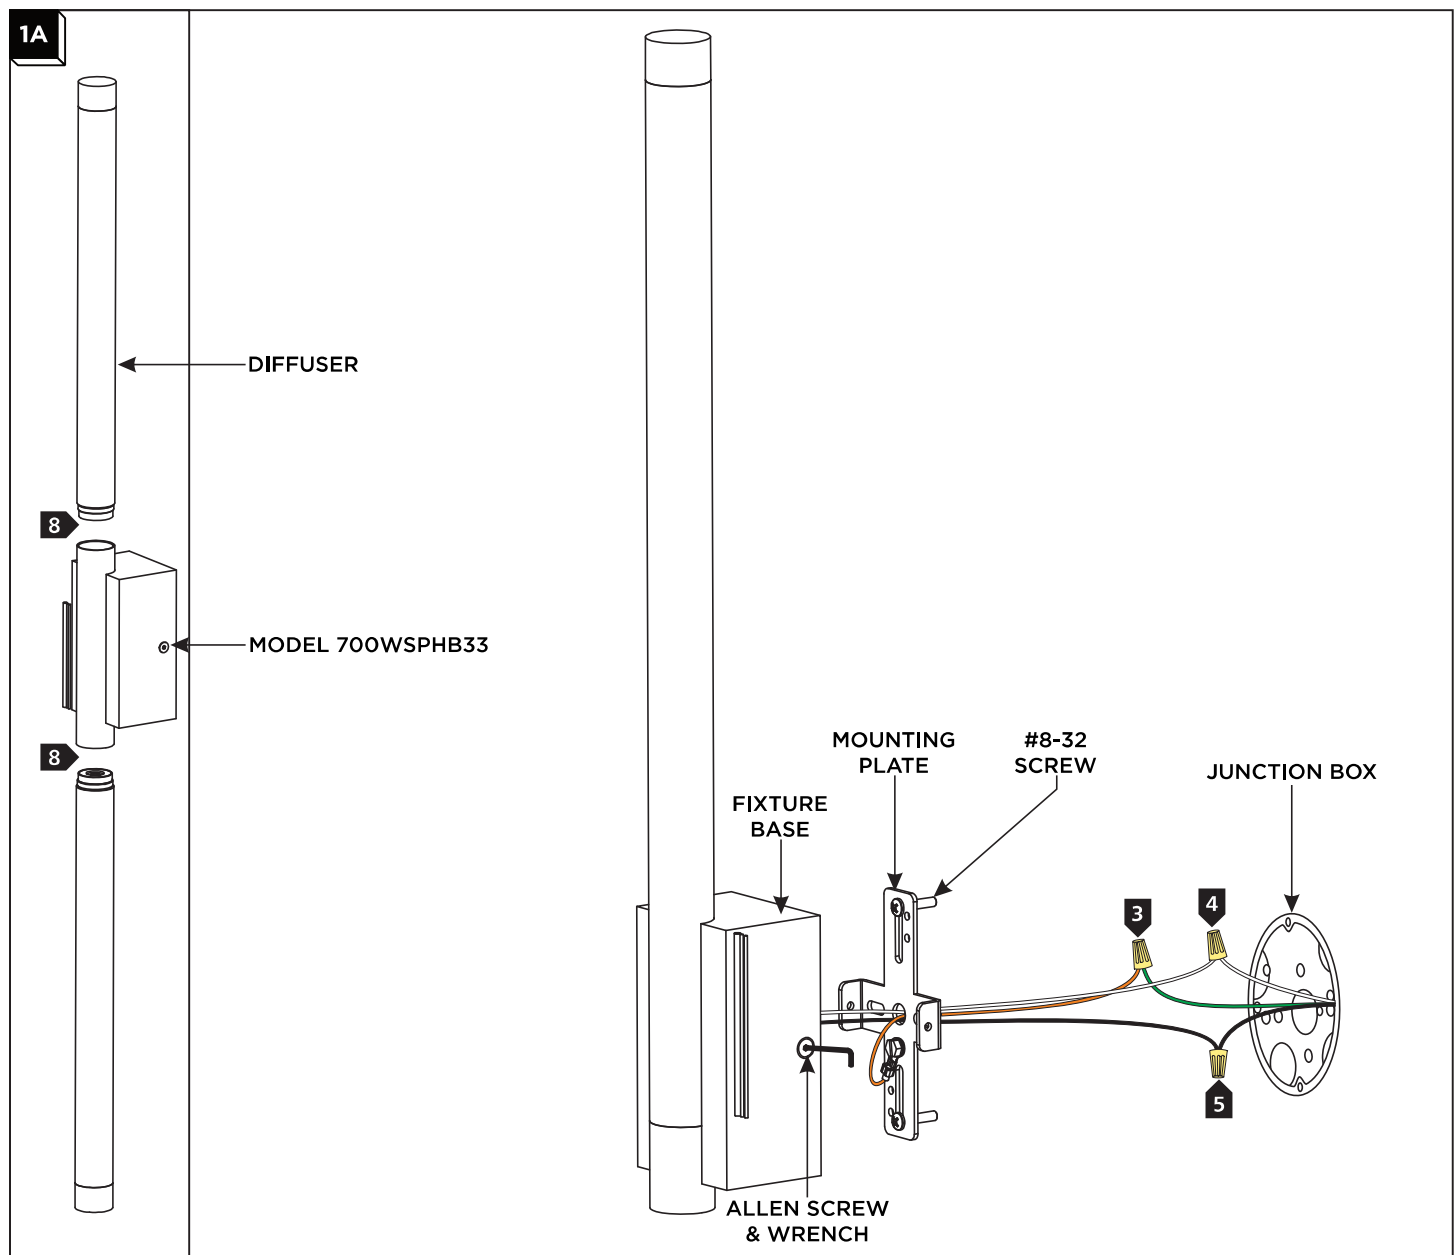

- 1 With the provided Allen wrench, loosen (do not remove) the set screw on the fixture base.
- 2 Remove the mounting plate from the fixture base.
- 3 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4 Connect the white input driver wire to the neutral power line with a wire nut.
- 5 Connect the black input driver wire to the hot power line with a wire nut.
- 6 Properly place all wires and wire nut connections into the junction box and install the mounting plate to the junction box with the two #8-32 screws provided.
- 7 Mount the fixture base onto the mounting plate, and secure it in place by tightening the set screws using the provided Allen wrench.
- 8 **Model 700WSPHB33 Only:** Screw the diffusers to the fixture.