


SANCHI GRANDE THREE-TIER CHANDELIER

SLCH32927

General Product Information

| | | | |
|---|--|---|--|
|  <p>ETL LISTED Intertek</p> |  <p>SAVE THESE INSTRUCTIONS!</p> |  <p>INDOOR</p> |  <p>DAMP LOCATION SAFE</p> |
|  <p>TWO-PERSON INSTALLATION RECOMMENDED</p> |  <p>DIMMABLE (LED, ELY, TRIAC & 10V)</p> |  <p>INTEGRATED LED NO BULBS REQUIRED</p> |  <p>PLEASE SEE visualcomfort.com FOR PRODUCT SPECS</p> |
|  <p>CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!</p> |  <p>BEST PRACTICE: HANDLE FIXTURE WITH GLOVES</p> |  <p>NEC COMPLIANT JUNCTION BOX</p> | |
|  <p>Product Warranty</p> |  <p>FCC Statement</p> | | |

Tools Required

| | |
|--|--|
|  <p>PHILLIPS-HEAD SCREWDRIVER</p> |  <p>WIRE CUTTER</p> |
|--|--|

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.
Install and use this product in adherence with local electrical codes and regulations.



FIXTURE PARTS

- A. Driver
- B. Mounting Plate
- C. Dimming Wires
- D. Driver Wires
- E. Wire Nuts
- F. Bare Copper Wire
- G. Fixture Wires
- H. Safety Cable
- I. #8-32 Screws
- J. Wood Screws
- K. Half Ball
- L. Canopy
- M. Collar Nut and Top Stem Assembly
- N. Stem Assembly
- O. Stems
- P. Stem Connectors
- Q. Fixture (Two-Tier Variety Pictured)

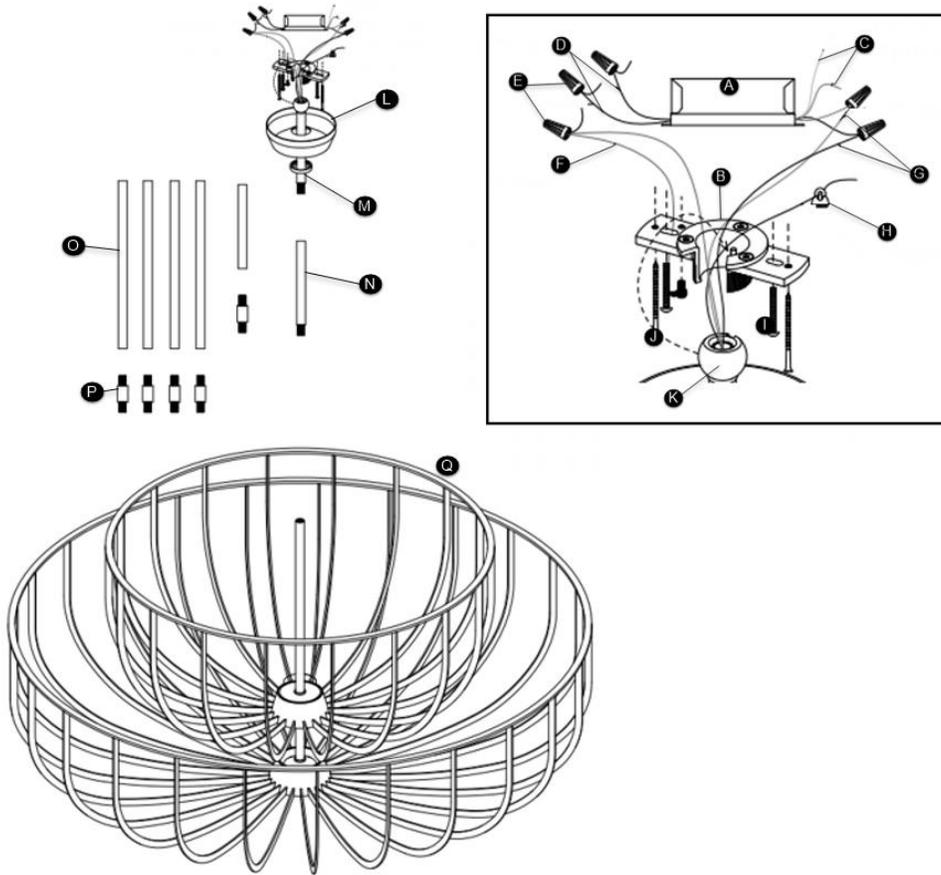

INSTRUCTIONS

1. Remove the mounting plate and driver from the canopy.
2. Determine the desired height of the fixture using the provided stems and assemble them by screwing them together using the stem connectors.
3. Feed the fixture wires and safety cable through the stem assembly, then screw the bottom of the stem assembly to the top of the fixture.
4. Feed the fixture wires and safety cable through the collar nut, canopy and top stem assembly and then screw onto the stem assembly.
5. Place the driver in the junction box.
6. Secure the mounting plate to the junction box (not pictured) with the #8-32 mounting screws ensuring you have access to the driver wires and power wires.
7. Screw the wood screw onto the ceiling.
8. Feed the fixture wires and safety cable through the mounting plate and secure the safety cable to a secure solid structure in accordance with local building codes.
9. Seat the half ball into the mounting plate. **WARNING:** Make sure to avoid pinching the wires.
10. Connect the fixture to a suitable ground in accordance with local electrical codes.
11. Connect black driver wire to solid blue fixture wire with a wire nut.
12. Connect red driver wire to red fixture wire with a wire nut.
13. Connect the white driver wires to the neutral power line wire with a wire nut.
14. Connect the black driver wires to the hot power line wire with a wire nut.
15. If using 0-10V dimming, connect the purple and pink wires to a compatible dimmer. If not using 0-10V dimming, cap off the purple and pink wires.
16. Neatly place all wires, and wire nut connections inside the canopy, and secure the canopy in place by tightening the collar nut.