


## ASSEMBLY INSTRUCTIONS

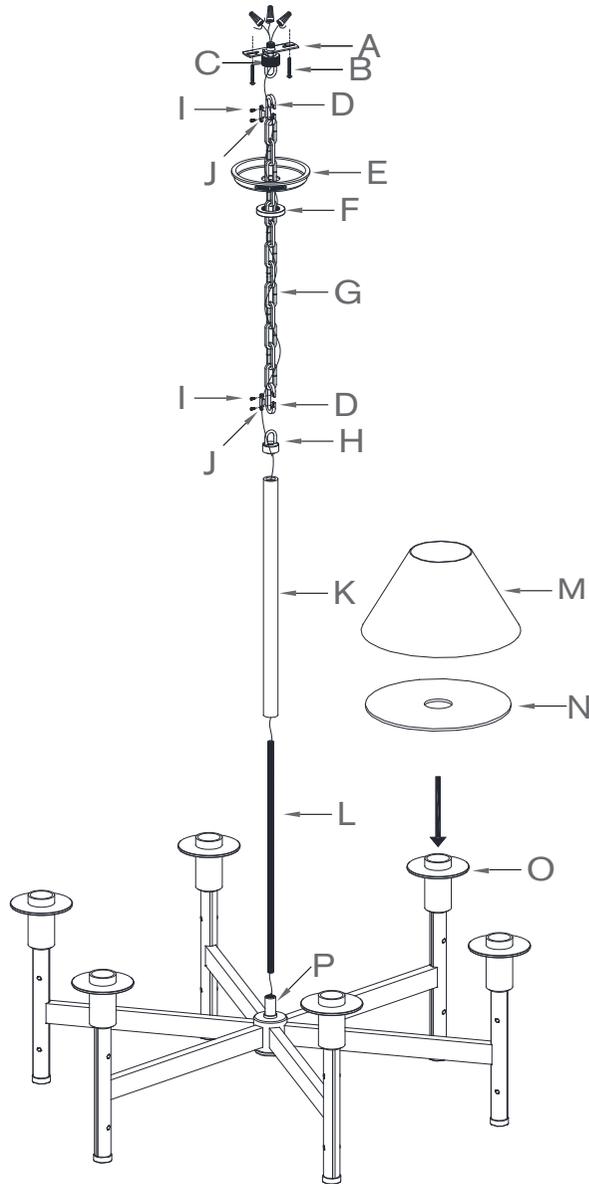

## Radford Medium Chandelier

Item # RL 5571

### NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

1. Carefully remove all parts from the carton.
2. Feed the wire through the connection rod (L), tube (K), hanging loop (H) and chain (G).
3. Thread connection rod (L) into the joint (P) by turning in a clockwise direction until tight.
4. Slide tube (K) on joint (P), let the connection rod (L) pass through the tube (K).
5. Screw hanging loop (H) onto the top of connection rod (L).
6. Remove canopy ring (F) from mounting loop (C) by turning in a clockwise direction.
7. Slide canopy ring (F) and canopy (E) on chain (G).
8. Attach mounting strap (A) to ceiling outlet box and secure with mounting screws (B).
9. Remove the metal covers (J) from end links (D) by removing set screws (I), attach one of end link (D) with hanging loop (H) together, the other end link (D) with mounting loop (C) together and secure by replacing metal covers (J) to end links. Tighten with set screws (I).
10. Attach the bare copper ground wire from the fixture to the ground junction box wire (usually green or copper), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed. **IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**
11. Connect neutral wire from fixture (ribbed molded wire) to the neutral wire from the junction box (usually white). Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed.

# RALPH LAUREN



## ASSEMBLY INSTRUCTIONS

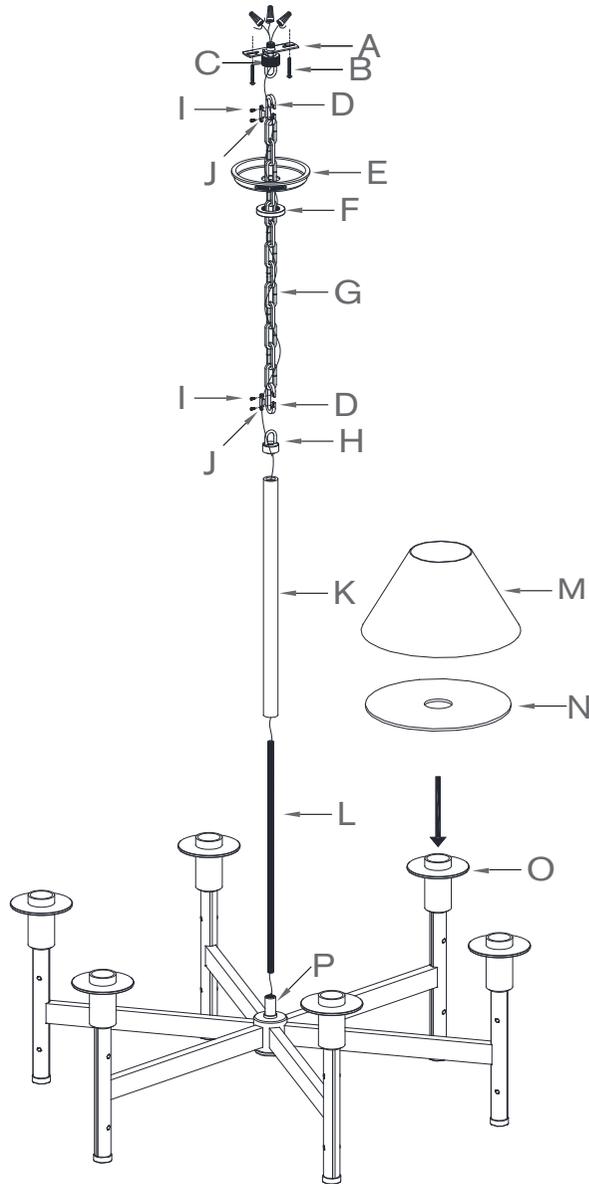

## Radford Medium Chandelier

Item # RL 5571

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

12. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black ) from the junction box. Fasten both together with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
13. Tuck the wire connections neatly into the ceiling outlet box.
14. Slip canopy (E) to mounting strap (A) and secure with canopy ring (F).
15. Place the acrylic diffusers (N) onto the sockets (O).  
Note: The sandblasted side should be facing down.
16. Insert light bulbs (not included) into sockets
17. Clip shades (M) onto the light bulbs.
18. Restore power and test fixture. Installation is complete.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

# RALPH LAUREN

