

ASSEMBLY INSTRUCTIONS

Matias 24" Carved Wood Backlit Mirror

Item # AL2075

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):


Phillips Screwdriver

Slotted Screwdriver

Hammer

Pencil

Drill

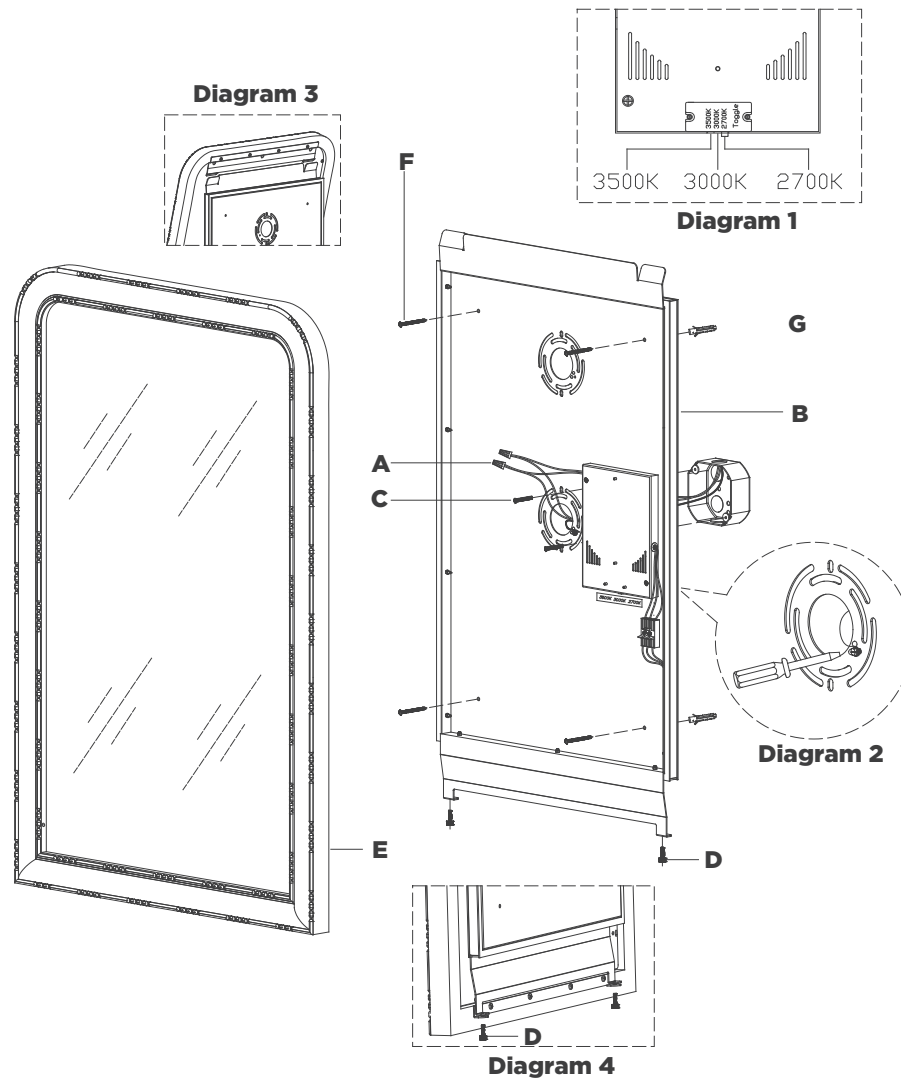

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Using fixture **(B)** as a guide, line up with the junction box and mark anchor positions.
3. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(G)** into the holes using a hammer.
4. Install fixture **(B)** to the junction box and secure with mounting screws **(C)**, then secure wood screws **(F)** to anchors **(G)**.

LED TOGGLE SWITCH: Adjustable LED color temperature. For desired color temperature, adjust between pre-set 2700K, to 3000K, or 3500K (see diagram 1).

5. Wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 2). Tighten.

NOTE: It is imperative that the fixture is grounded.

6. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
7. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.

CAUTION: Do not reverse the hot and neutral connections.


ASSEMBLY INSTRUCTIONS

Matias 24" Carved Wood Backlit Mirror

Item # AL2075

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

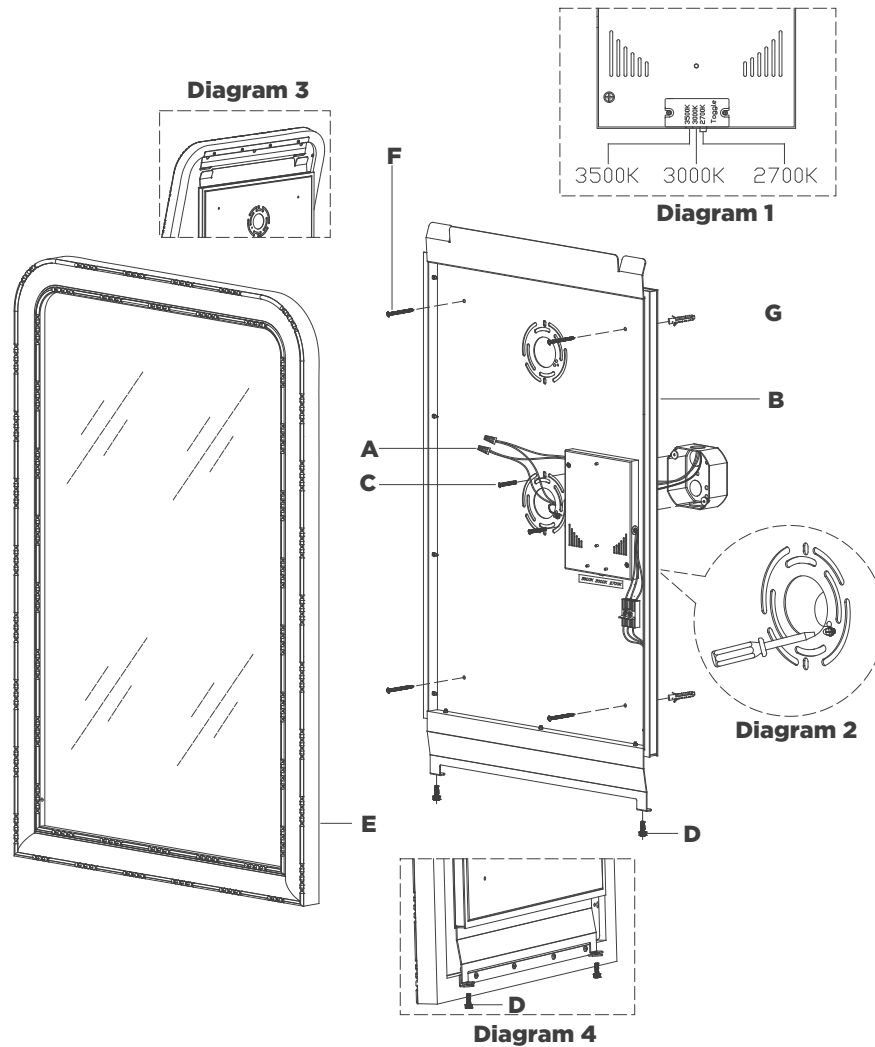

8. Make sure all wire connections are tight, then carefully tuck into the junction box.
9. Hang mirror (**E**) to fixture (**B**) and secure with thumb screws (**D**) (see diagram 3 & 4).

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.