ASSEMBLY INSTRUCTIONS

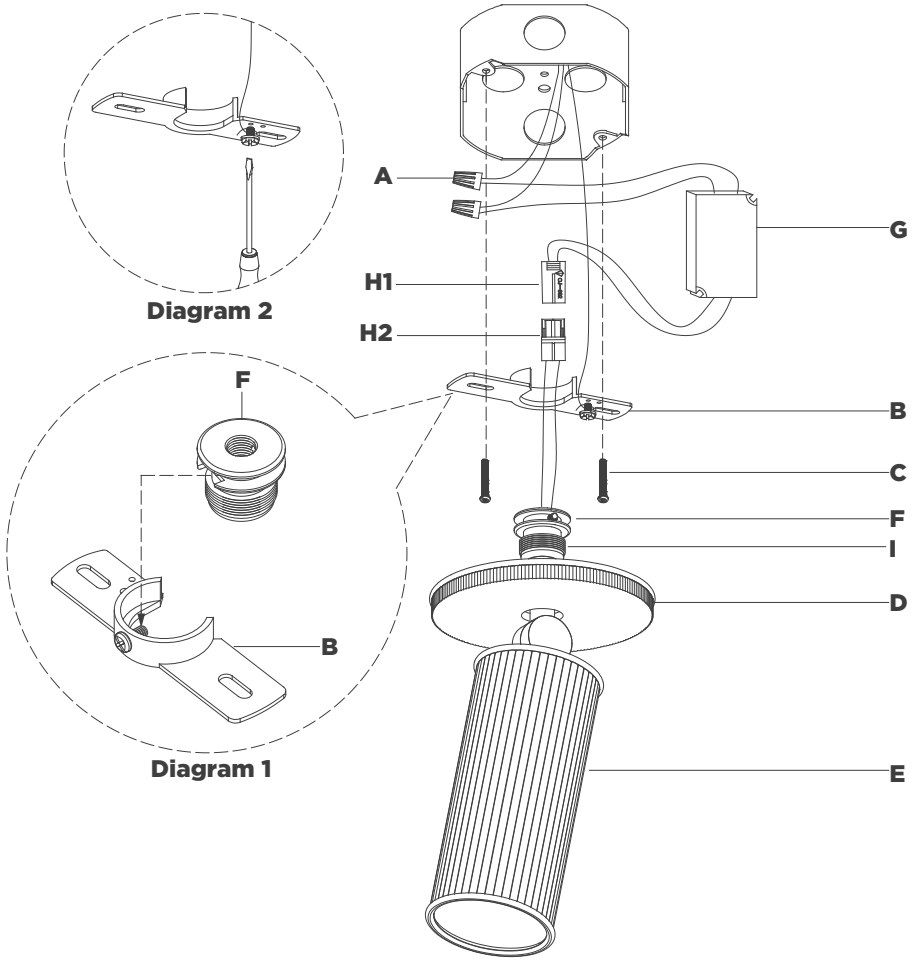


Diagram 2

Diagram 1

Tate 8” Pivoting Monopoint Flush Mount

Item # MF4210

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy **(D)** from collar **(I)** by unscrewing, then remove mounting plate **(B)** from fan mount **(F)**.
3. Connect driver **(G)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
4. Connect driver **(G)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
   CAUTION: Do not reverse the hot and neutral connections.
5. Insert driver **(G)** into junction box.
6. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.
7. Align slot on fan mount **(F)** with screws on mounting plate **(B)** (see diagram 1), then hang fan mount **(F)** to center of mounting plate **(B)**.
8. Connect fixture ground wire (bare copper) to supply ground wire (usually green or bare copper) using wire nut **(A)** (see diagram 2).
   NOTE: It is imperative that the fixture is grounded.
9. Connect quick connector **(H1 & H2)** together.

ASSEMBLY INSTRUCTIONS

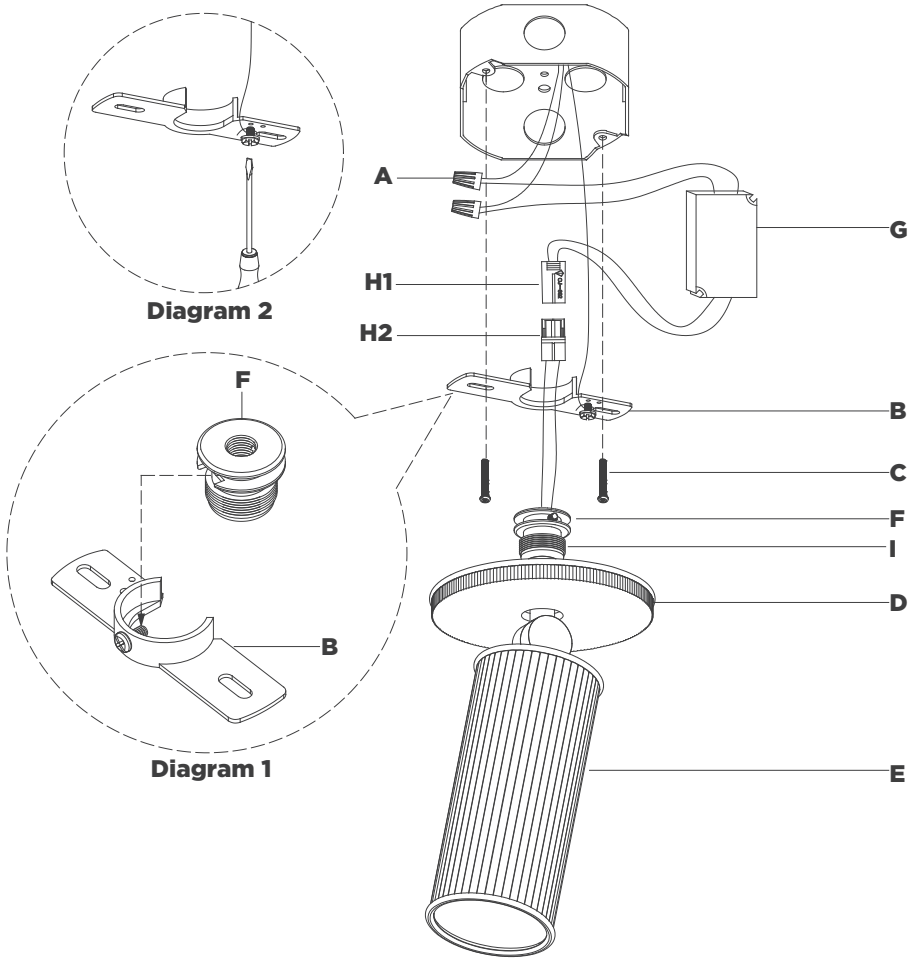

Tate 8” Pivoting Monopoint Flush Mount

Item # MF4210

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

10. Thread canopy **(D)** to collar **(I)**.
11. Adjust shade **(E)** to desired angle.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.